

AD 2 AERODROMES

RJNO AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RJNO - OKI

RJNO AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	361042N/1331924E 068° /1.00km FM RWY 08 THR
2	Direction and distance from (city)	83km N FM YONAGO City
3	Elevation/ Reference temperature	262FT / 29°C (2001-2005)
4	Geoid undulation at AD ELEV PSN	112FT
5	MAG VAR/ Annual change	8°W(2007) / 1.3'W
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	SHIMANE PREF. PUBLIC AP. OKI Airport Administration Office, Misakimachi, Okinoshima-cho, Oki-gun, Shimane Pref. Tel: 08512-2-0703 Fax:08512-2-6250 E-mail: okikukokanri@pref.shimane.lg.jp Web: http://www.pref.shimane.jp/
7	Types of traffic permitted(IFR/ VFR)	IFR/VFR
8	Remarks	Nil

RJNO AD 2.3 OPERATIONAL HOURS

1	AD Administration	0000 - 0800
2	Customs and immigration	On request Customs: 0859-42-2228 Immigration: 0859-47-3600
3	Health and sanitation	Quarantine(human): On request(0859-42-3517) Quarantine(animal, plant): Nil
4	AIS Briefing Office	Nil
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24 (KANSAI)
7	ATS	0000-0800 Remarks: AFIS provided by Osaka Airport Office.
8	Fuelling	0000-0800
9	Handling	0000-0800
10	Security	Ask AD administration
11	De-icing	Ask AD administration
12	Remarks	Nil

RJNO AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Ask AD administration
2	Fuel/ oil types	Fuel grade :JET A1/ Ask AD administration
3	Fuelling facilities/ capacity	Fuel truck refueling / Ask AD administration
4	De-icing facilities	Ask AD administration
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

RJNO AD 2.5 PASSENGER FACILITIES

1	Hotels	Hotels in Okinoshima-cho
2	Restaurants	Restaurants in Okinoshima-cho
3	Transportation	Busses and Taxi
4	Medical facilities	Hospital in Okinoshima-cho 5km from airport
5	Bank and Post Office	Bank and Post Office in Okinoshima-cho
6	Tourist Office	Nil
7	Remarks	Nil

RJNO AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT 7
2	Rescue equipment	Chemical fire fighting truck x 2, Emergency medical equipments conveyance truck x 1
3	Capability for removal of disabled aircraft	Ask AD administration
4	Remarks	Nil

RJNO AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	Types of clearing equipment	Snow plow x 2, Spreader x 1, Snow sweeper x 1, Tractor shovel x 2
2	Clearance priorities	(1)RWY 08/26 (2)TWY, APRON
3	Remarks	Nil

RJNO AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	Surface: Cement-Concrete, Strength: PCN 52/R/B/X/T
2	Taxiway width, surface and strength	Width: 23m, Surface: asphalt-concrete, Strength: PCN 45/F/B/X/T
3	ACL and elevation	Not available
4	VOR checkpoints	Not available
5	INS checkpoints	Spot NR 1: 361042.62N 1331948.74E 2: 361041.97N 1331946.89E 3: 361041.16N 1331945.75E 4: 361041.11N 1331944.26E
6	Remarks	Nil

RJNO AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY: RWY 08/26 (Marking) RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe, RWY turn pad edge, RWY turn pad CL (LGT) RCLL, REDL, RTHL, RENL, Turning point indicator LGT, RWY DIST marker LGT TWY: (Marking) TWY CL, RWY HLDG PSN, TWY side stripe (LGT) TWY edge LGT, TWY CL LGT
3	Stop bars	Nil
4	Remarks	(Marking) Overrun area, ACFT PRKG PSN, APN TWY CL (LGT)APN flood LGT

RJNO / OKI


180° Turn on RWY

小型ジェット機用の滑走路180°転回要領

1. 滑走路中心線からターニングパッド中心線標識に従って進行する。
2. 転回灯1が一直線に見えるように進行し、転回灯2が一直線に見えた時転回を開始する。
 転回時はMAX STEERING ANGLEを使用する。

180° turn on runway of SJ aircraft

1. Proceed along the RWY Turn Pad Center Line Marking.
 2. Proceed along the RWY Turn Pad Center Line Marking to see the Turning Point Indicator Light 1 on a straight line, then commence turn at the spot where you (pilot) can see the Turning Point Indicator Light 2 on a straight line at an angle of 9 o'clock.
- When turning, take MAX STEERING ANGLE.

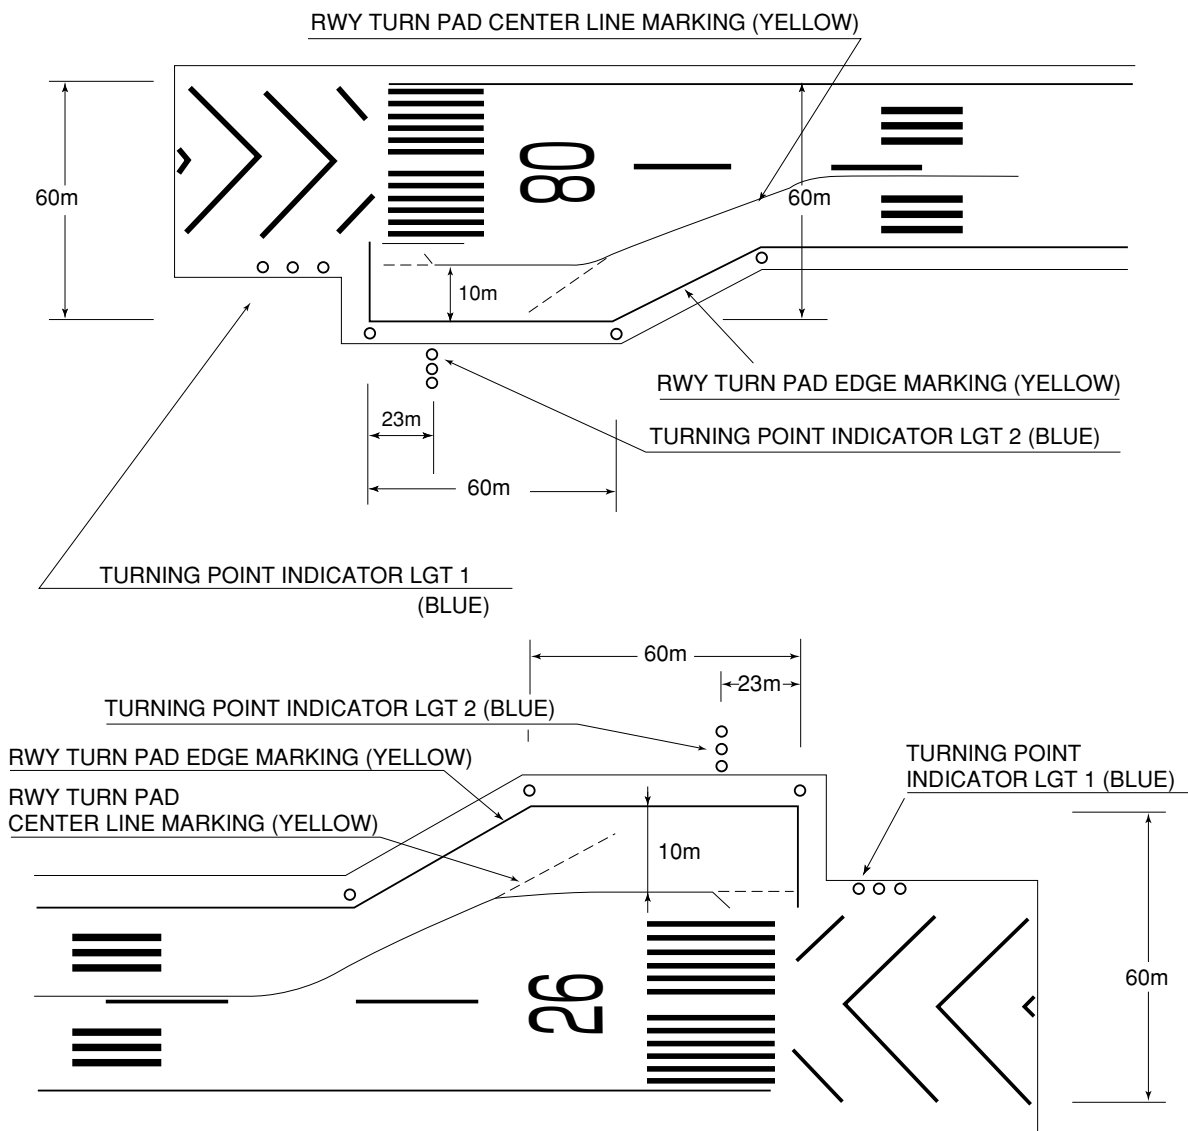

RJNO AD 2.10 AERODROME OBSTACLES

In Area 2 See Obstacle data

Other obstacles

OBST ID/ designation	Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
RJNO1	Concrete pole	361023.2N/1332015.0E	409ft	-/LIM(Red)	Under horizontal surface

In Area 3 To be developed

RJNO AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	KANSAI
2	Hours of service MET Office outside hours	H24 (KANSAI)
3	Office responsible for TAF preparation Periods of validity	Nil
4	Trend forecast Interval of issuance	Nil.
5	Briefing/ consultation provided	Briefing is available upon inquiry at KANSAI
6	Flight documentation Language(s) used	C En
7	Charts and other information available for briefing or consultation	S ₆ , U ₈₅ , U ₇ , U ₅ , U ₃ , U ₂₅ , U ₂ /T _r , P _S , P ₅ , P ₃ , P ₂₅ , P _{SWE} , P _{SWF} , P _{SWG} , P _{SWI} , P _{SWM} , P _{SW} (domestic), E, C, W _E , W _F , W _G , W _I , W, N
8	Supplementary equipment available for providing information	Nil
9	ATS units provided with information	RADIO
10	Additional information(limitation of service, etc.)	Nil

RJNO AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCN) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
08	067.89°	2000x45	PCN 45/F/B/X/T Asphalt-Concrete	361030.04N 1331847.67E 112ft	THR ELEV:253ft
26	247.89°	2000x45	PCN 45/F/B/X/T Asphalt-Concrete	361054.47N 1332001.82E 112ft	THR ELEV:272ft

Slope of RWY	Strip Dimensions(M)	RESA(Overrun) Dimensions(M)	Remarks
7	10	11	14
See below Figure	2120x150 2120x150	40x(MNM:149 MAX:150)* 40x(MNM:148 MAX:150)* *For detail, ask airport administrator	RWY Grooving: 2000m x 30m

LONGITUDINAL PROFILE RUNWAY

RWY08 RWY26

253ft 262ft 272ft

0.3% 0.3%

0m 1000m 2000m

RJNO AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
08	2000	2000	2000	2000	Nil
26	2000	2000	2000	2000	Nil

RJNO AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
08	Nil	Green -	PAPI 3.0° /LEFT 355m 61ft	Nil	2,000m 30m Coded color LIH	2,000m 60m Coded color LIH	Red	Nil (*1)
26	Nil	Green -	PAPI 3.0° /LEFT 400m 61ft	Nil	2,000m 30m Coded color LIH	2,000m 60m Coded color LIH	Red	Nil (*1)
Remarks								
10								
Overrun area edge LGT(LEN:60m Color:Red)(*1) CGL for RWY 26 RWY THR ID LGT for RWY 08/26 THR(Color:White)								

RJNO AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN: 361039N/1331956E, White/Green EV4.3sec, HO
2	LDI location and LGT Anemometer location and LGT	Nil
3	TWY edge and center line lighting	TWY edge and center line lights installed, see AD2.9
4	Secondary power supply/ switch-over time	Within 15 sec All Lights
5	Remarks	WDI LGT

RJNO AD 2.16 HELICOPTER LANDING AREA

Nil

RJNO AD 2.17 ATS AIRSPACE

Designation and lateral limits		Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1		2	3	4	6
OkI Information zone	Area within a radius of 5NM (9km) of OkI ARP	3000 or below	E	OKI RADIO En	


RJNO AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
AFIS	OKI RADIO	118.65MHz	0000 - 0800	Operated by Osaka Airport Office.


RJNO AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid (VOR declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR (8°W/2012)	OIE	109.25MHz	H24	361036.27N 1331922.16E		VOR/DME Unusable: 020°-030° beyond 15NM BLW 3000ft.
DME	OIE	1116MHz (CH-29Y)	H24	361036.27N 1331922.16E	270ft	200°-240° beyond 20NM BLW 3000ft. 290°-020° beyond 15NM BLW 4000ft.
LOC 08	IOA	111.55MHz	0000 - 0800	361058.12N 1332001.74E		LOC 08: 40m(131ft) away FM RWY 26 THR, 105m(344ft) N of RCL, LOC offset angle 1.65° BRG (MAG) 074.59°. Unusable: beyond 20° N (90Hz) side of LOC course.
LOC-DME 08	IOA	1139MHz (CH-52Y)	0000 - 0800	361100.05N 1332002.09E	286ft	DME 08: 71m(233ft) away FM RWY 26 THR, 157m(515ft) N of RCL.
MSAS		1575.42MHz	H24			Transmitting antennas are satellite based

LOC and LOC-DME for RWY08

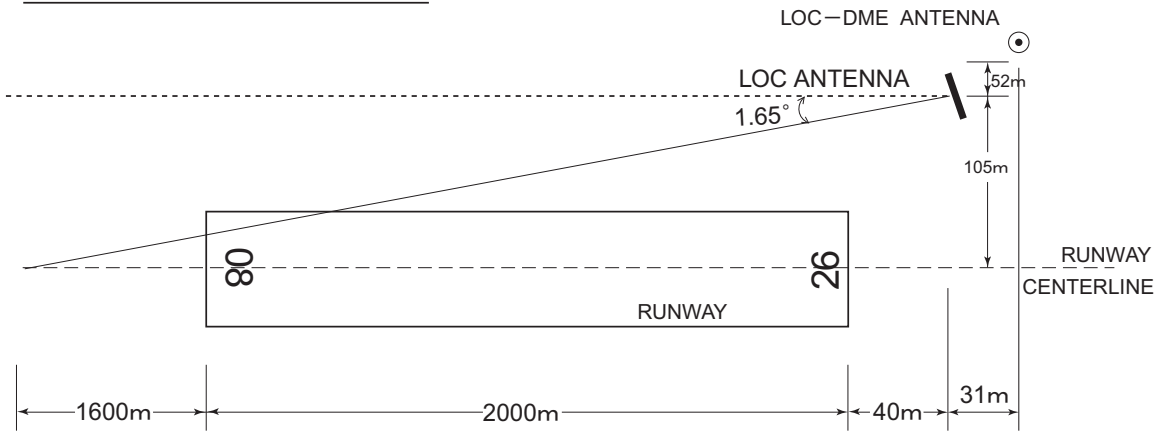

- REMARKS :
- | | |
|-----------------------|---------------|
| 1. LOC OFFSET ANGLE | 1.65° |
| 2. LOC BEAM BRG (MAG) | 074.59° |
| 3. ELEV of LOC-DME | 87.1m (286ft) |

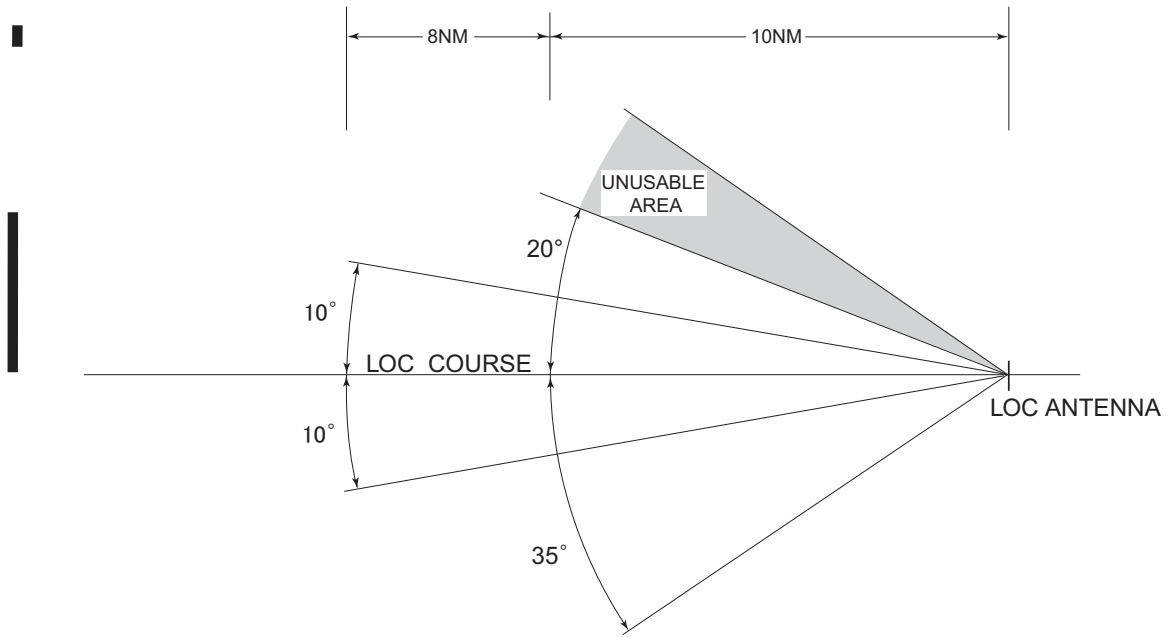

UNUSABLE : BEYOND 20DEG NORTH(90Hz) SIDE OF LOC COURSE.

RJNO AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

On use of OKI airport, aircraft operator is required to notify Shimane Pref in advance.

2. Taxiing to and from stands

Nil

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Nil

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

RJNO AD 2.21 NOISE ABATEMENT PROCEDURES

Ask AD administration

RJNO AD 2.22 FLIGHT PROCEDURES

TAKE OFF MINIMA

	RWY	ACFT CAT	REDL & RCLL		REDL or RCLL or RCL Marking		NIL (DAY TIME ONLY)	
			RVR	VIS	RVR	VIS	RVR	VIS
Multi-Engine ACFT with TKOF ALTN AP FILED	08	A,B,C,D	-	400m	-	400m	-	500m
	26	A,B,C,D	-	400m	-	400m	-	500m
OTHER	08	A,B,C,D	AVBL LDG MINIMA					
	26	A,B,C,D						

RJNO AD 2.23 ADDITIONAL INFORMATION

Ask AD administration

RJNO AD 2.24 CHARTS RELATED TO AN AERODROME


Aerodrome/Heliport Chart
 Standard Departure Chart - Instrument (DOZEN)
 Standard Departure Chart - Instrument (NAKAU-RNAV)
 Standard Departure Chart - Instrument (OKUNI-RNAV)
 Standard Departure Chart - Instrument (TSUNO-RNAV)
 Standard Arrival Chart - Instrument (SAIGO)
 Instrument Approach Chart (LOC Z RWY08)
 Instrument Approach Chart (LOC Y RWY08)
 Instrument Approach Chart (VOR RWY26)
 Instrument Approach Chart (RNP RWY08)
 Instrument Approach Chart (RNP RWY26)
 Other Chart (Visual REP)
 Other Chart (LDG CHART)
 Other Chart (MVA CHART)

INTENTIONALLY LEFT BLANK

RJNO / OKI

AD CHART

CHANGE : APRON Marking

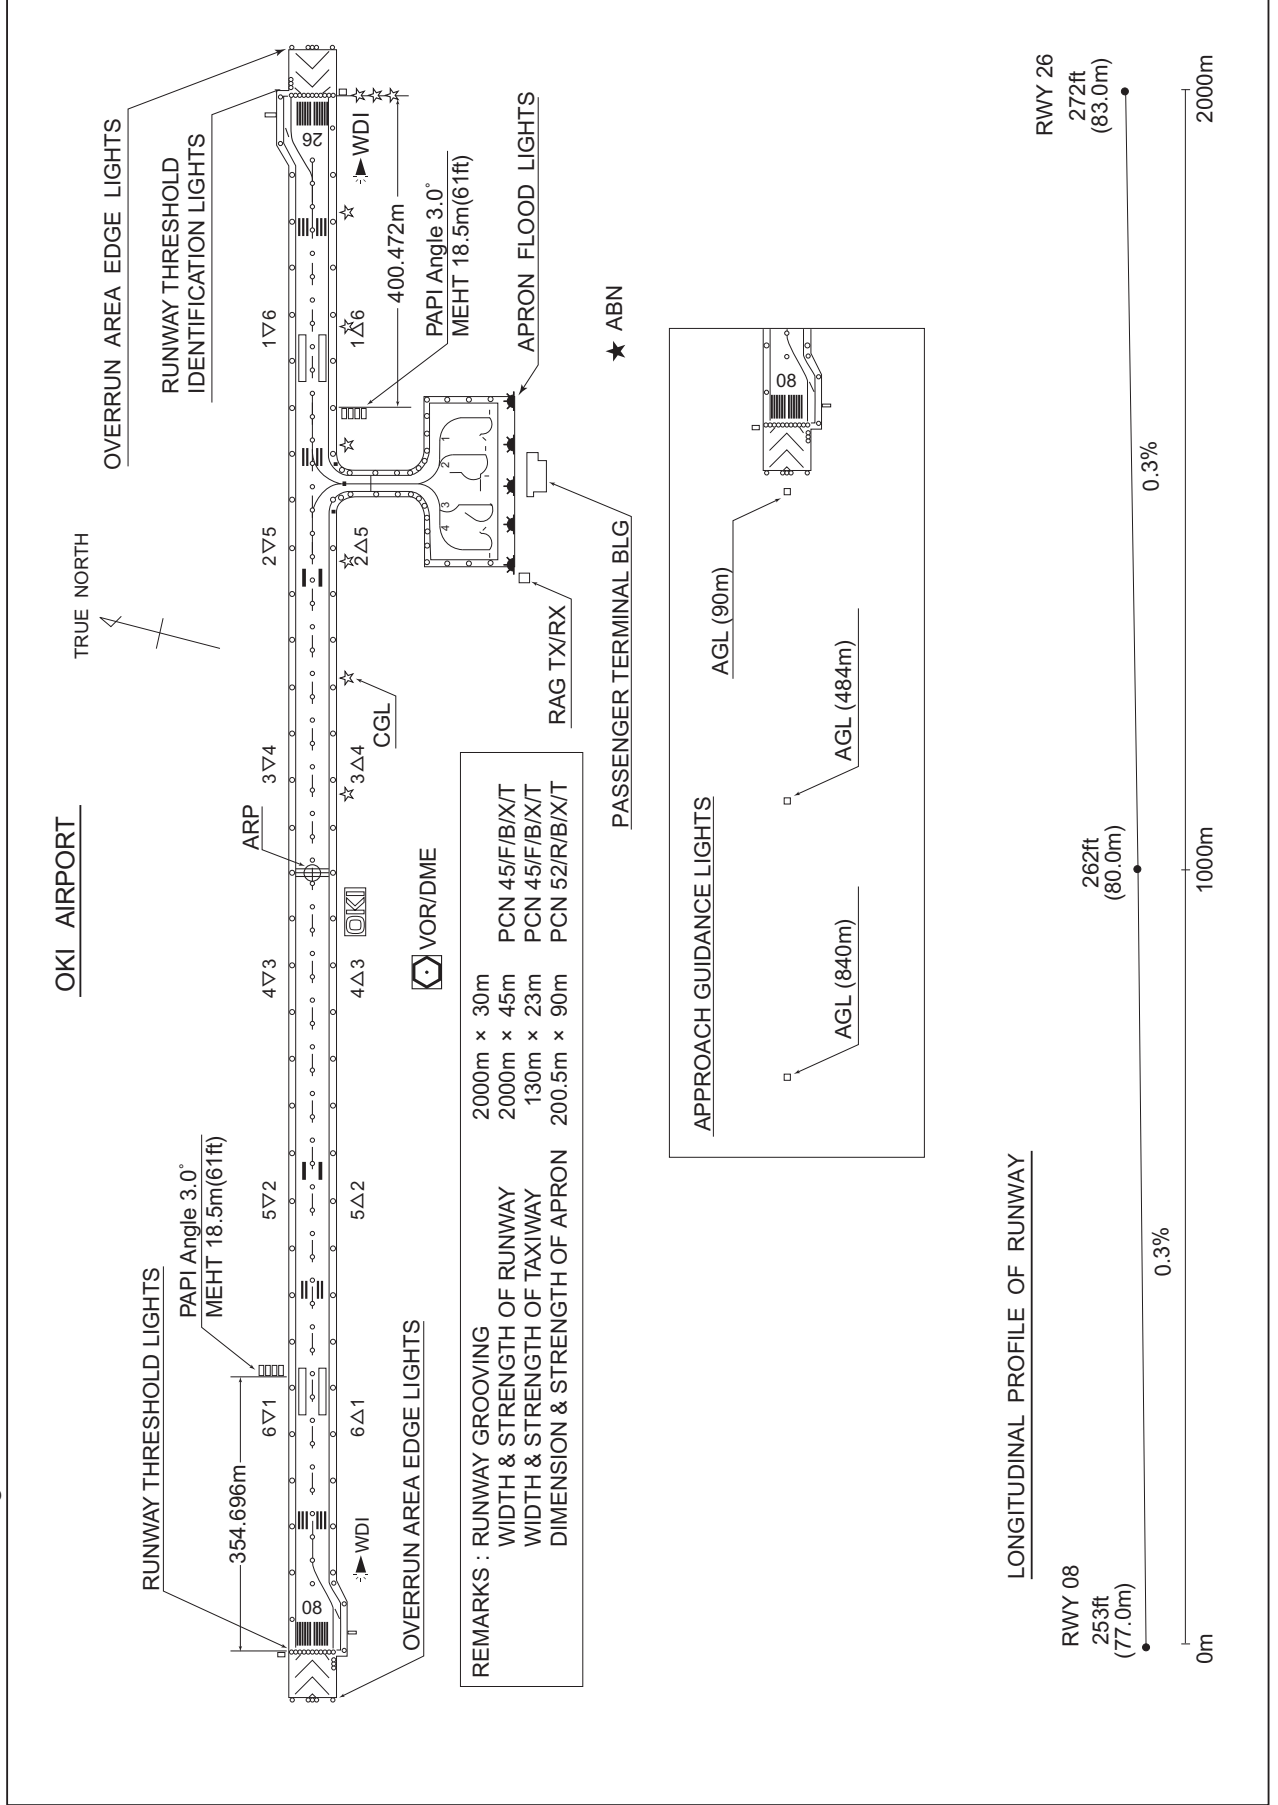

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI


SID

DOZEN FOUR DEPARTURE

RWY08 : Climb RWY HDG to 800FT, turn right HDG258°...

RWY26 : Climb RWY HDG to 900FT, turn left HDG168°...

...to intercept and proceed via OIE R213 to DOZEN.

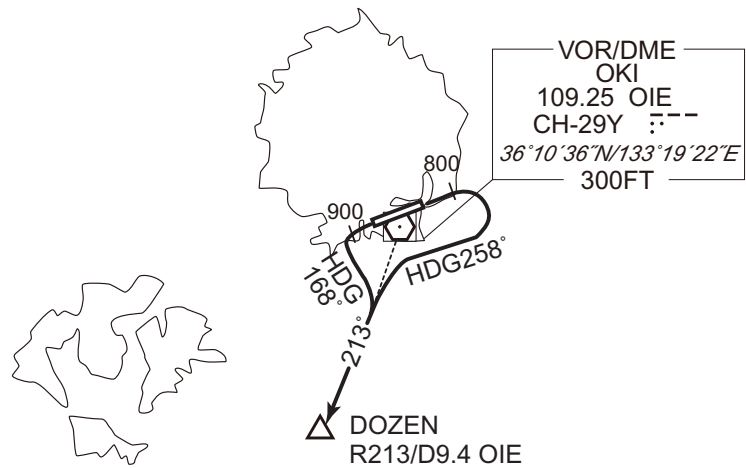

CHANGE : Description of PROC name.

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI


RNAV SID

NAKAU TWO DEPARTURE

RNP1

Note GNSS required.

VAR 9°W

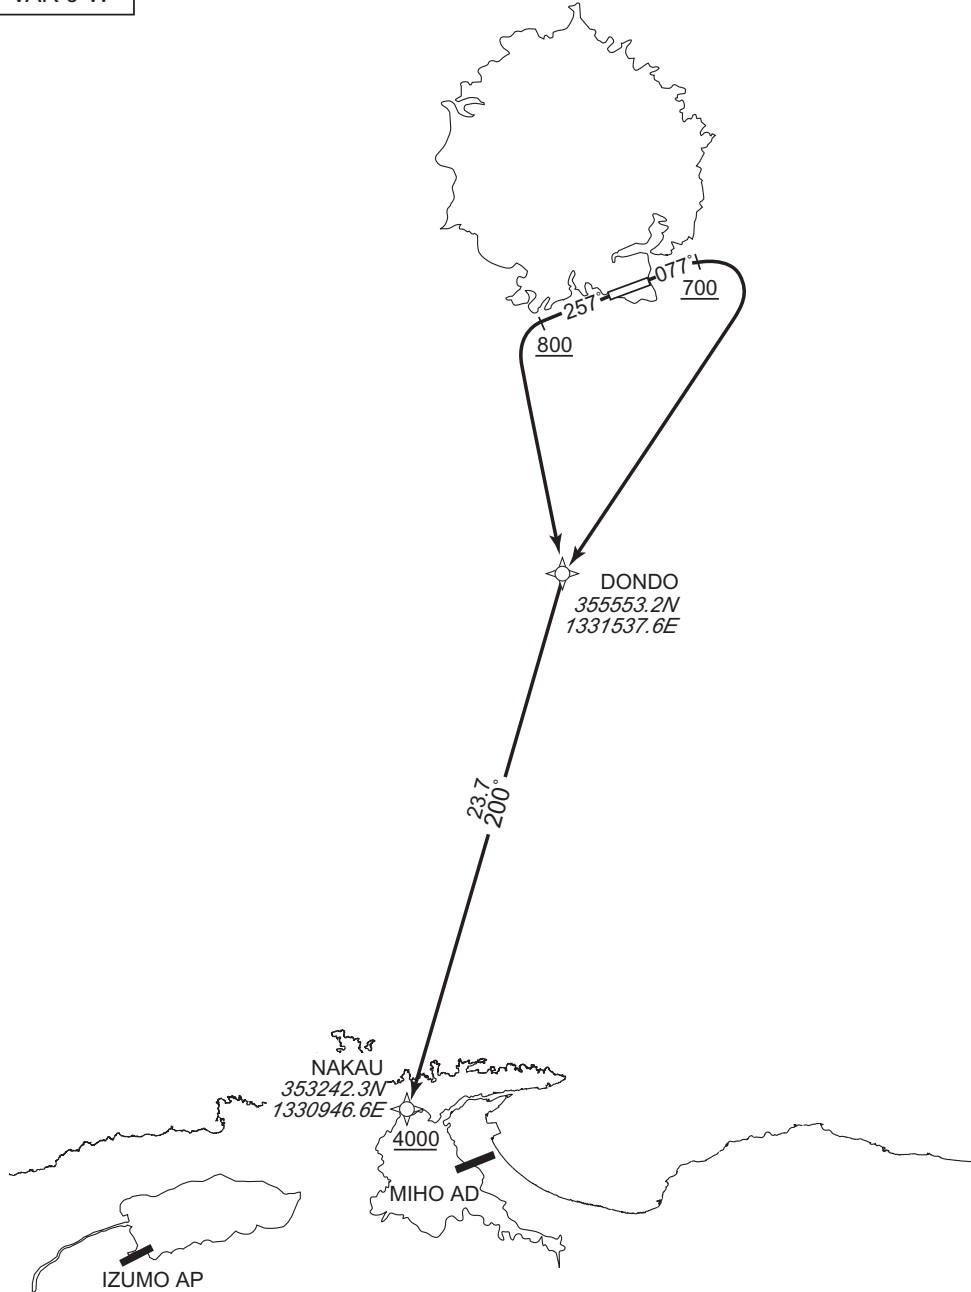

CHANGE : PROC renamed. PROC course. VAR.

- RWY08 : Climb on HDG 077° at or above 700FT, turn right direct to DONDO, to NAKAU at or above 4000FT.
- RWY26 : Climb on HDG 257° at or above 800FT, turn left direct to DONDO, to NAKAU at or above 4000FT.

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI

RNAV SID

NAKAU TWO DEPARTURE

RWY08


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	077 (067.8)	-8.8	-	-	+700	-	-	RNP1
002	DF	DONDO	-	-	-8.8	-	R	-	-	-	RNP1
003	TF	NAKAU	-	200 (191.6)	-8.8	23.7	-	+4000	-	-	RNP1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	257 (247.8)	-8.8	-	-	+800	-	-	RNP1
002	DF	DONDO	-	-	-8.8	-	L	-	-	-	RNP1
003	TF	NAKAU	-	200 (191.6)	-8.8	23.7	-	+4000	-	-	RNP1

CHANGE : PROC renamed. PROC course. VAR.

STANDARD DEPARTURE CHART -INSTRUMENT

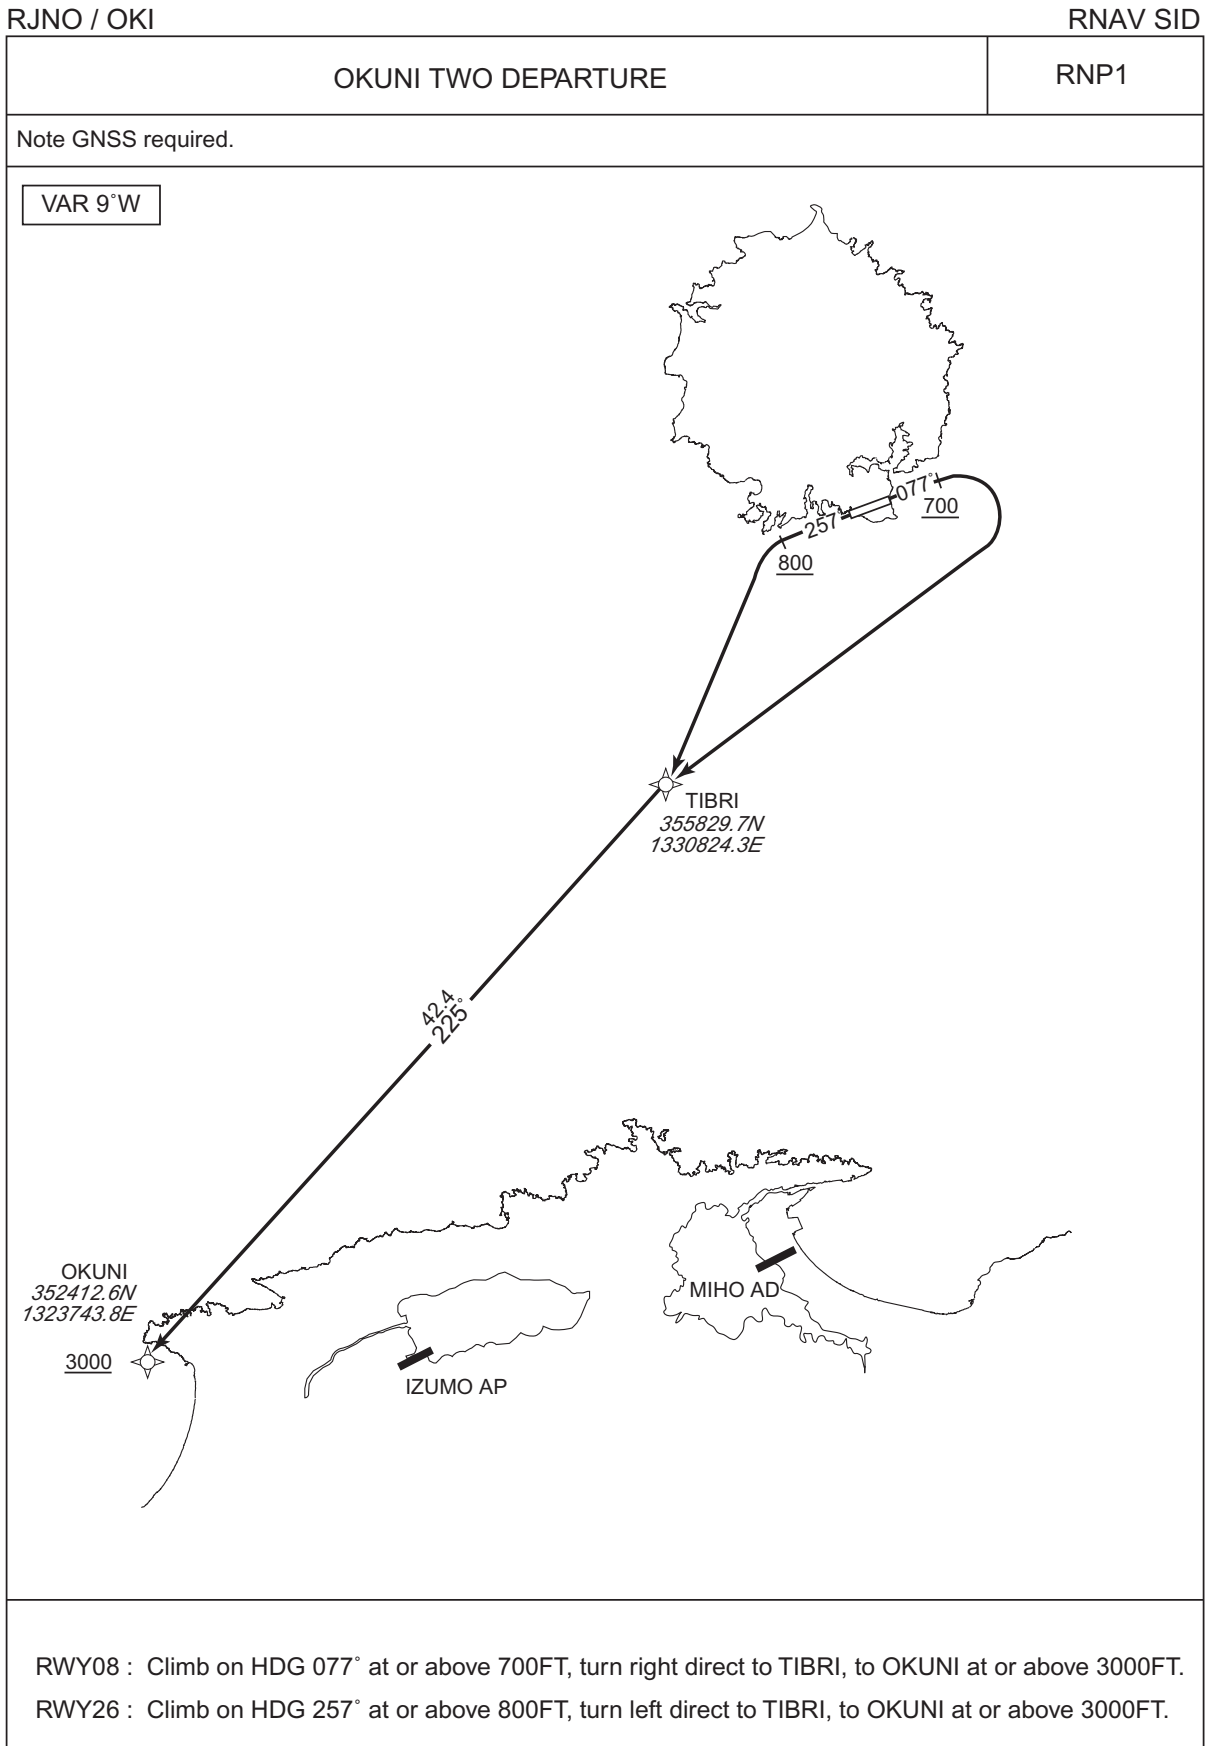

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI

RNAV SID

OKUNI TWO DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	077 (067.8)	-8.8	-	-	+700	-	-	RNP1
002	DF	TIBRI	-	-	-8.8	-	R	-	-	-	RNP1
003	TF	OKUNI	-	225 (216.2)	-8.8	42.4	-	+3000	-	-	RNP1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	257 (247.8)	-8.8	-	-	+800	-	-	RNP1
002	DF	TIBRI	-	-	-8.8	-	L	-	-	-	RNP1
003	TF	OKUNI	-	225 (216.2)	-8.8	42.4	-	+3000	-	-	RNP1

CHANGE : PROC renamed. PROC course. VAR.

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI


RNAV SID

TSUNO TWO DEPARTURE

RNP1

Note GNSS required.

VAR 9°W

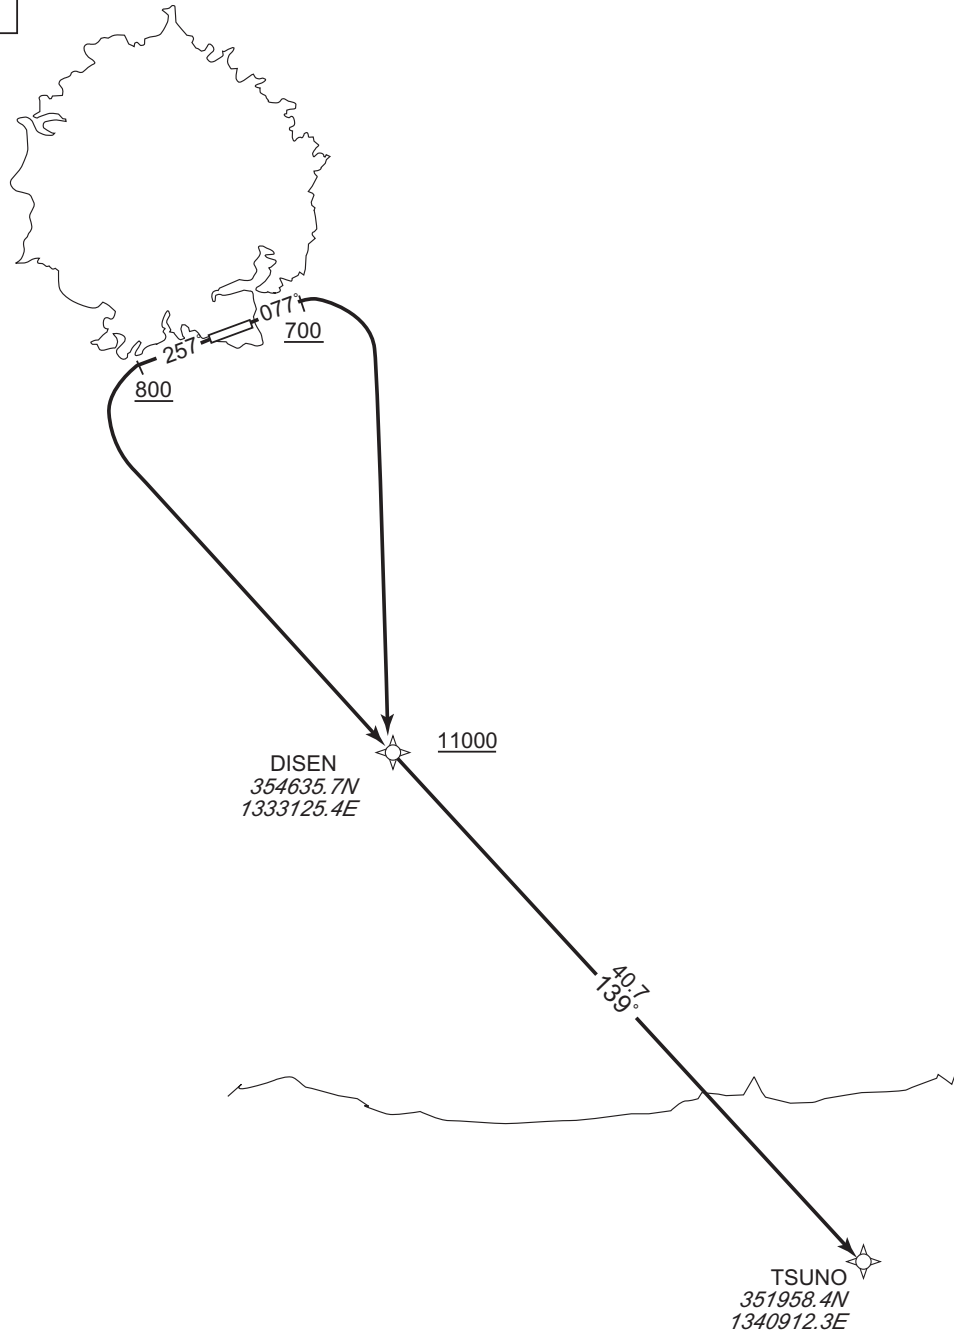

CHANGE : PROC renamed. PROC course. VAR.

RWY08 : Climb on HDG 077° at or above 700FT, turn right direct to DISEN at or above 11000FT, to TSUNO.

RWY26 : Climb on HDG 257° at or above 800FT, turn left direct to DISEN at or above 11000FT, to TSUNO.

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI

RNAV SID

TSUNO TWO DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	077 (067.8)	-8.8	-	-	+700	-	-	RNP1
002	DF	DISEN	-	-	-8.8	-	R	+11000	-	-	RNP1
003	TF	TSUNO	-	139 (130.7)	-8.8	40.7	-	-	-	-	RNP1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	257 (247.8)	-8.8	-	-	+800	-	-	RNP1
002	DF	DISEN	-	-	-8.8	-	L	+11000	-	-	RNP1
003	TF	TSUNO	-	139 (130.7)	-8.8	40.7	-	-	-	-	RNP1

CHANGE : PROC renamed. PROC course. VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJNO / OKI


RNAV STAR

SAIGO ARRIVAL

RNP1

Note GNSS required.

VAR 9°W

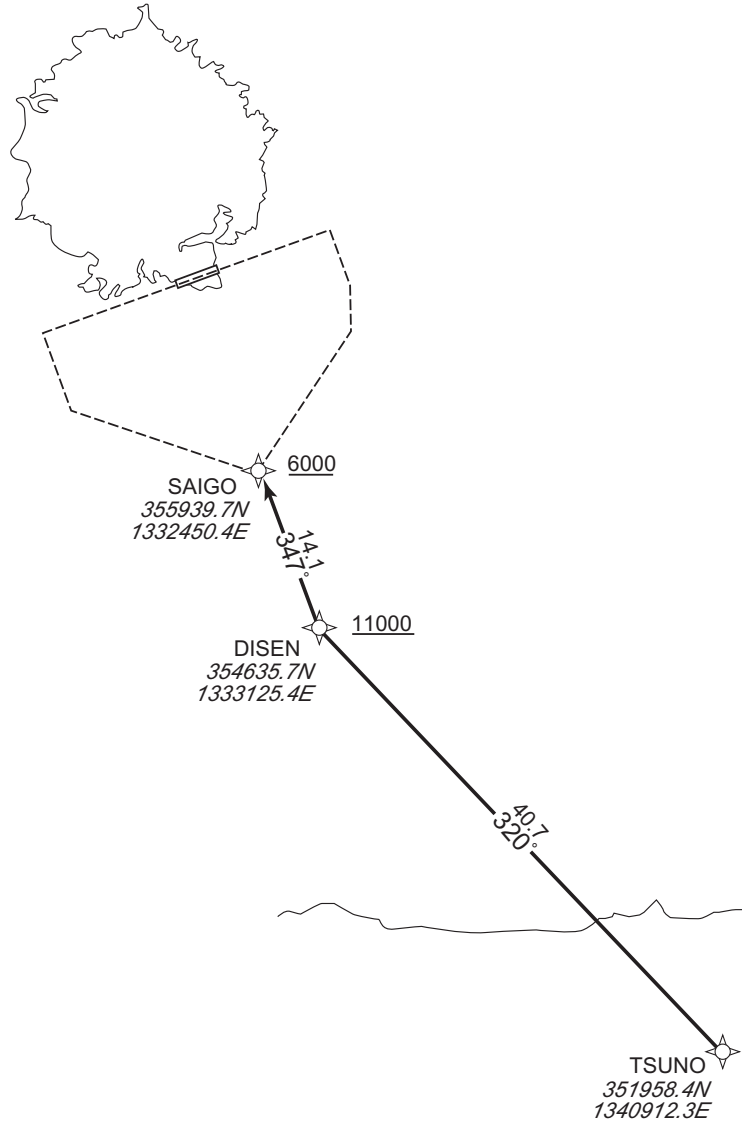

CHANGE : PROC course. VAR.

From TSUNO, to DISEN at or above 11000FT, to SAIGO at or above 6000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TSUNO	—	—	-8.8	—	—	—	—	—	RNP1
002	TF	DISEN	—	320 (311.1)	-8.8	40.7	—	+11000	—	—	RNP1
003	TF	SAIGO	—	347 (337.8)	-8.8	14.1	—	+6000	—	—	RNP1


INTENTIONALLY LEFT BLANK

INSTRUMENT APPROACH CHART


RJNO / OKI

LOC Z RWY08

KOBE CONTROL 133.8 – 126.1 287.6 – 278.2	OKI LOC 111.55 IOA --- LOC - DME CH-52Y 36°11'00"N/133°20'02"E	OKI RADIO 118.65 AFIS provided by Osaka Airport Office	NO RADAR
--	---	---	----------

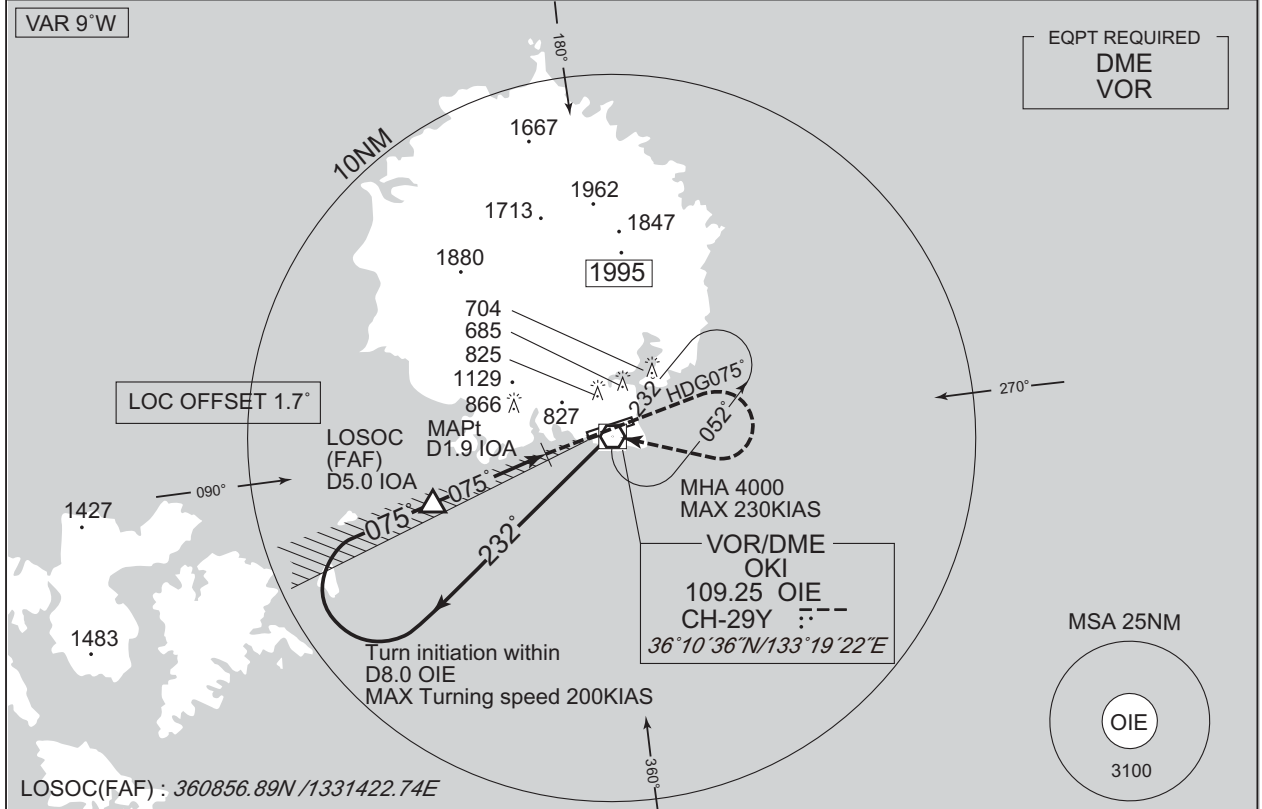

NM to IOA	FAF	4	3	2	MAPt
ALT (3.0° APCH Path)	1543	1219	901	582	-

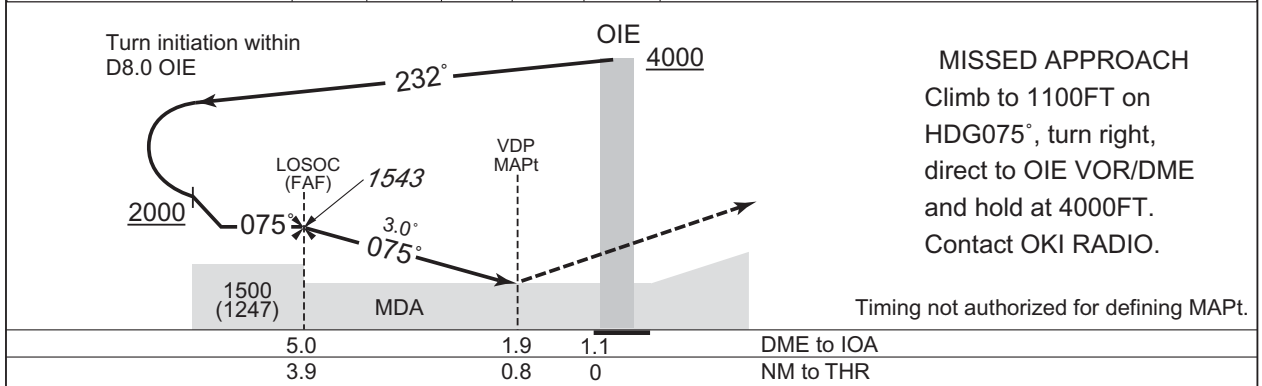

MISSED APPROACH
Climb to 1100FT on HDG075°, turn right, direct to OIE VOR/DME and hold at 4000FT. Contact OKI RADIO.

Timing not authorized for defining MAPt.

Missed APCH climb gradient MNM 4.0%

MINIMA		THR elev. 253	AD elev. 262
CAT	CIRCLING		
	MDA(H)	CMV	MDA(H) VIS
A	550 (297)	1500	730 (468) 1600
B		1600	830 (568) 2400
C		1800	960 (698) 3200
D			

Circling to SOUTH side of RWY only.
MINIMA with Missed APCH climb gradient of 2.5% are not established.


CHANGE : FREQ for KOBE CONTROL.

INSTRUMENT APPROACH CHART


RJNO / OKI

LOC Y RWY08

KOBE CONTROL 133.8 – 126.1 287.6 – 278.2	OKI LOC 111.55 IOA --- LOC - DME CH-52Y 36°11'00"N/133°20'02"E	OKI RADIO 118.65 AFIS provided by Osaka Airport Office	NO RADAR
--	---	---	----------

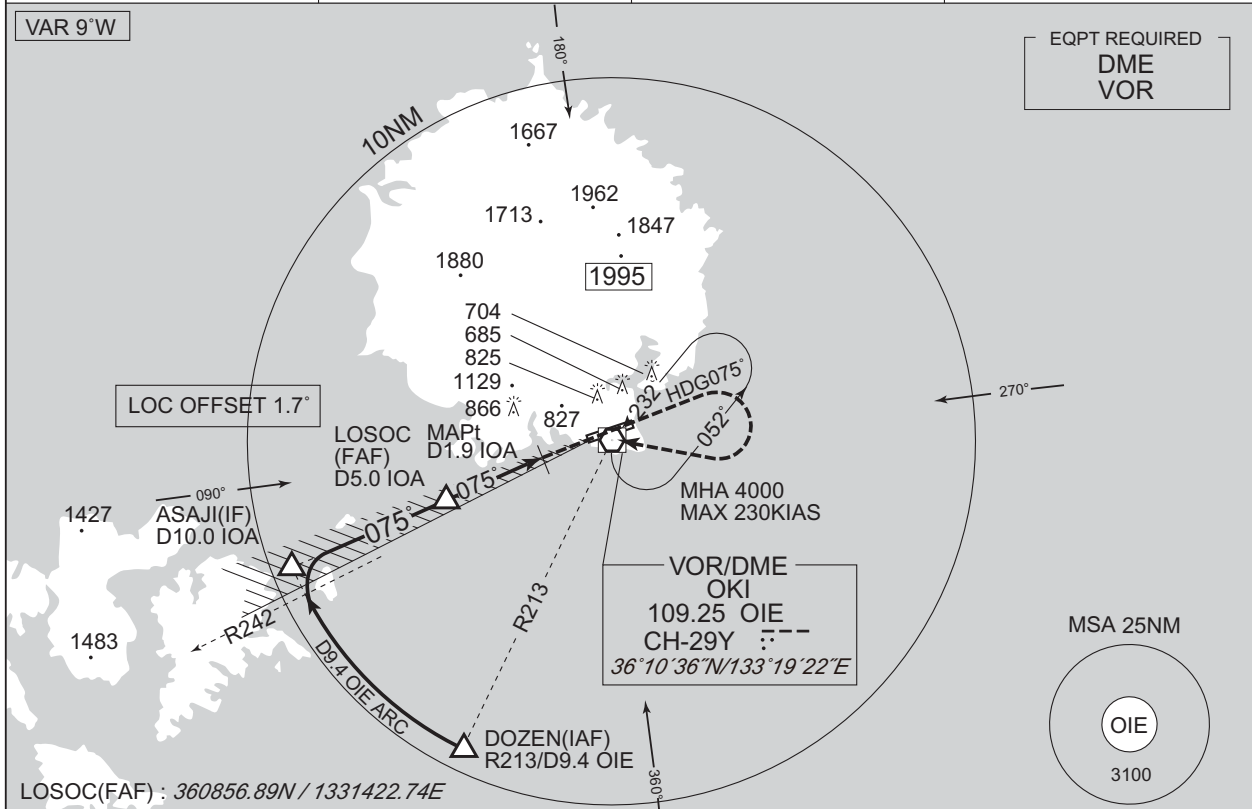

NM to IOA	FAF	4	3	2	MAPt
ALT (3.0° APCH Path)	1543	1219	901	582	-

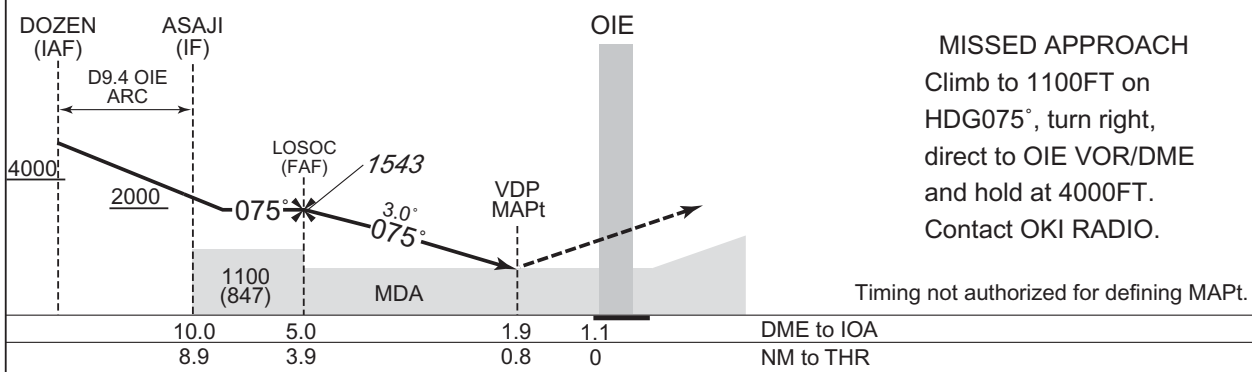

Missed APCH climb gradient MNM 4.0%

MINIMA		THR elev. 253	AD elev. 262
CAT	MDA(H)		CIRCLING
	550 (297)	CMV	MDA(H) VIS
		1500	730 (468) 1600
		1600	830 (568) 2400
1800		960 (698) 3200	


Circling to SOUTH side of RWY only.
MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : FREQ for KOBE CONTROL.

INSTRUMENT APPROACH CHART


RJNO / OKI

VOR RWY26

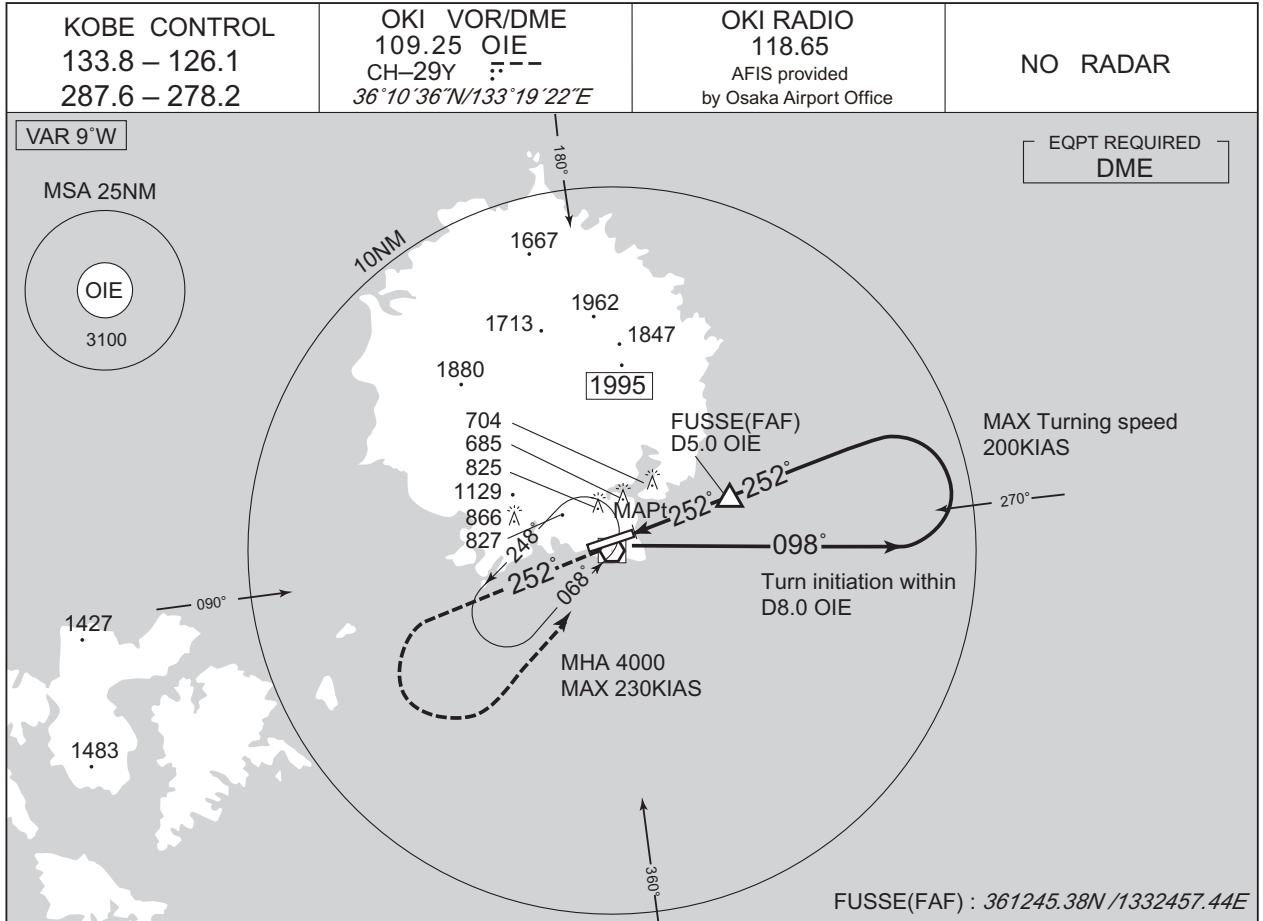

NM to OIE	MAPt	3	4	FAF
ALT (3.0° APCH Path)	–	1081	1400	1718

MISSED APPROACH
Climb to 1800FT via OIE
R252, turn left, direct to OIE
VOR/DME and hold at 4000FT.
Contact OKI RADIO.

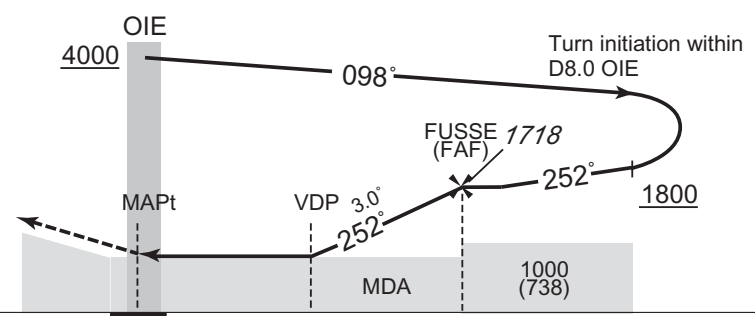

Timing not authorized for defining MAPt.

DME to OIE	0	0.7	2.7	5.0
NM to THR	0	2.0	4.4	

	MINIMA	THR elev. 272	AD elev. 262		
CAT			CIRCLING		
	MDA(H)	CMV	MDA(H)	VIS	
A	920 (658)	1500	920 (658)	1600	
B				2400	
C		2000	960 (698)	3200	
D					

Circling to SOUTH side of RWY only.



CHANGE : FREQ for KOBE CONTROL.

INTENTIONALLY LEFT BLANK

INSTRUMENT APPROACH CHART

RJNO / OKI

RNP RWY08

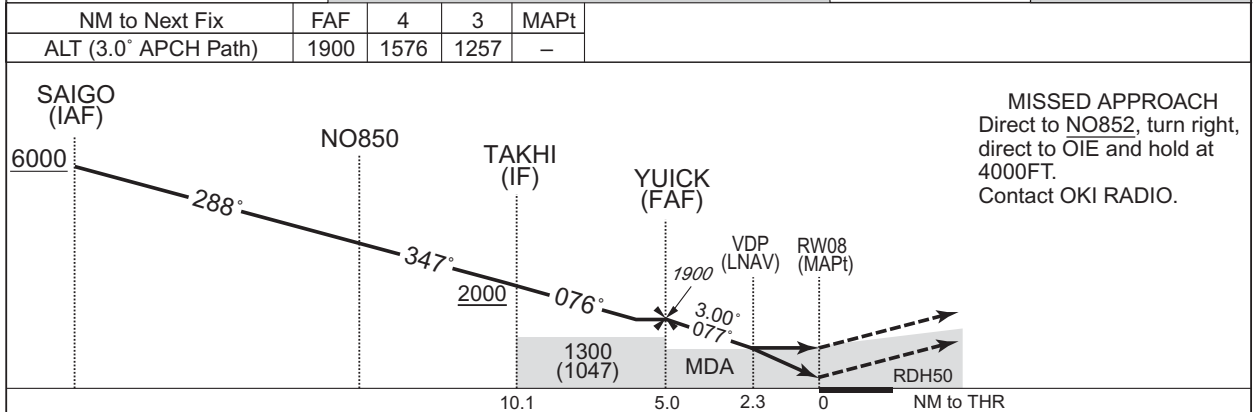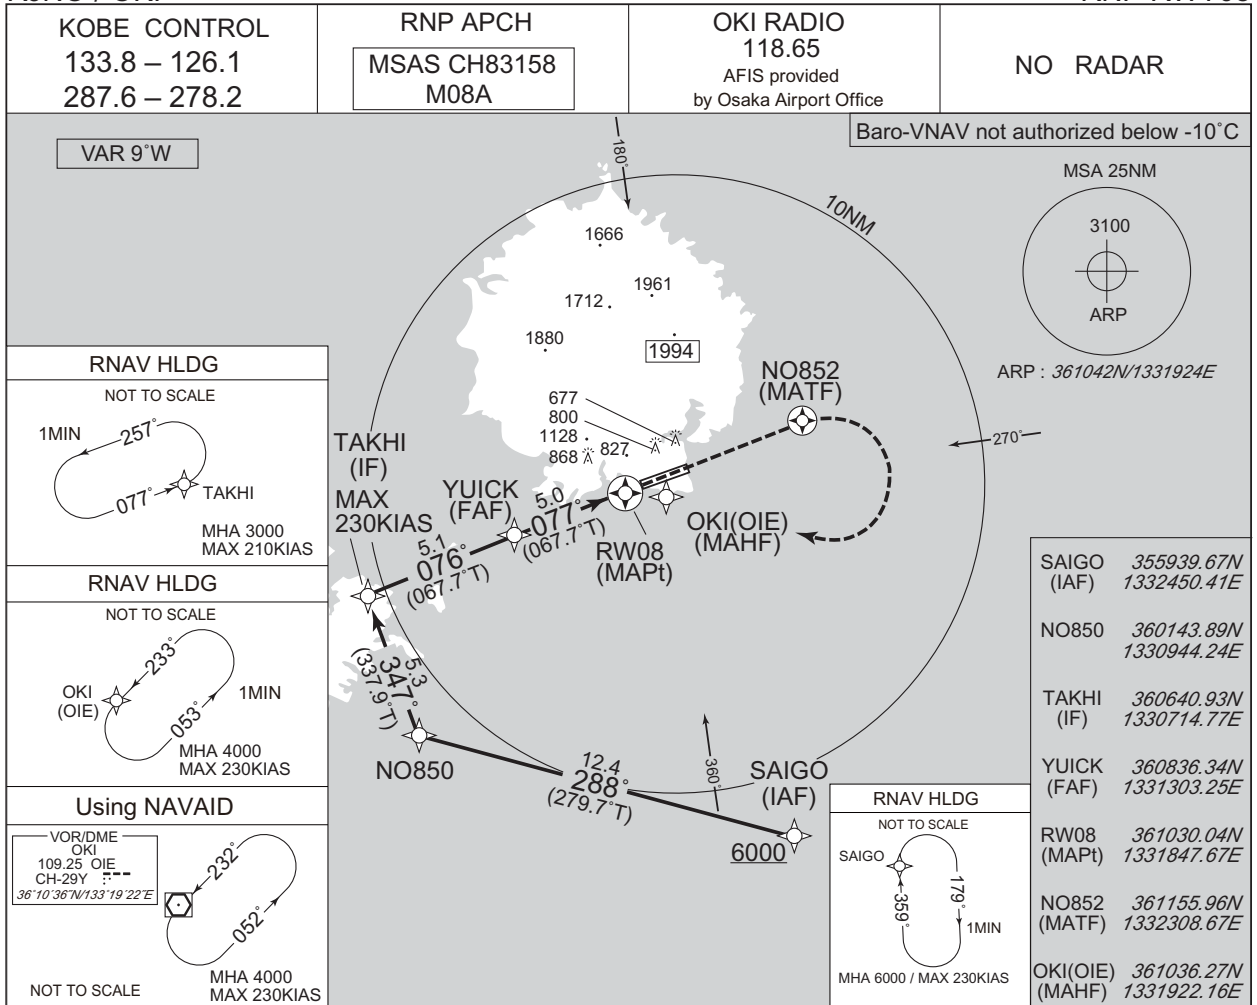

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 253		AD elev. 262				
CAT	LPV		LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	591 (338)	1500	742 (489)	1500	1010 (757)	1500	1010 (748)	1600
B	601 (348)							2400
C	611 (358)	1800	2000	2000	2000	2000	2000	3200
D	621 (368)	2000						3200

Circling to SOUTH side of RWY only.
MINIMA with Missed APCH climb gradient of 2.5% are not established.

INSTRUMENT APPROACH CHART

RJNO / OKI

RNP RWY08

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+01107
SBAS service provider identifier	2	FPAP latitude	361054.4595N
Airport identifier	RJNO	FPAP longitude	1332001.8525E
Runway	08	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M08A	∠ length offset	0000
LTP/FTP latitude	361030.0320N	HAL	40.0
LTP/FTP longitude	1331847.7060E	VAL	50.0
CRC remainder	1A0AB58B		

Required additional data


LTP/FTP orthometric height	76.8
----------------------------	------

CHANGE : FAS DATA BLOCK, Required additional data established.


INSTRUMENT APPROACH CHART

RJNO / OKI RNP RWY26

KOBE CONTROL 133.8 – 126.1 287.6 – 278.2	RNP APCH MSAS CH66498 M26A	OKI RADIO 118.65 AFIS provided by Osaka Airport Office	NO RADAR
--	----------------------------------	---	----------

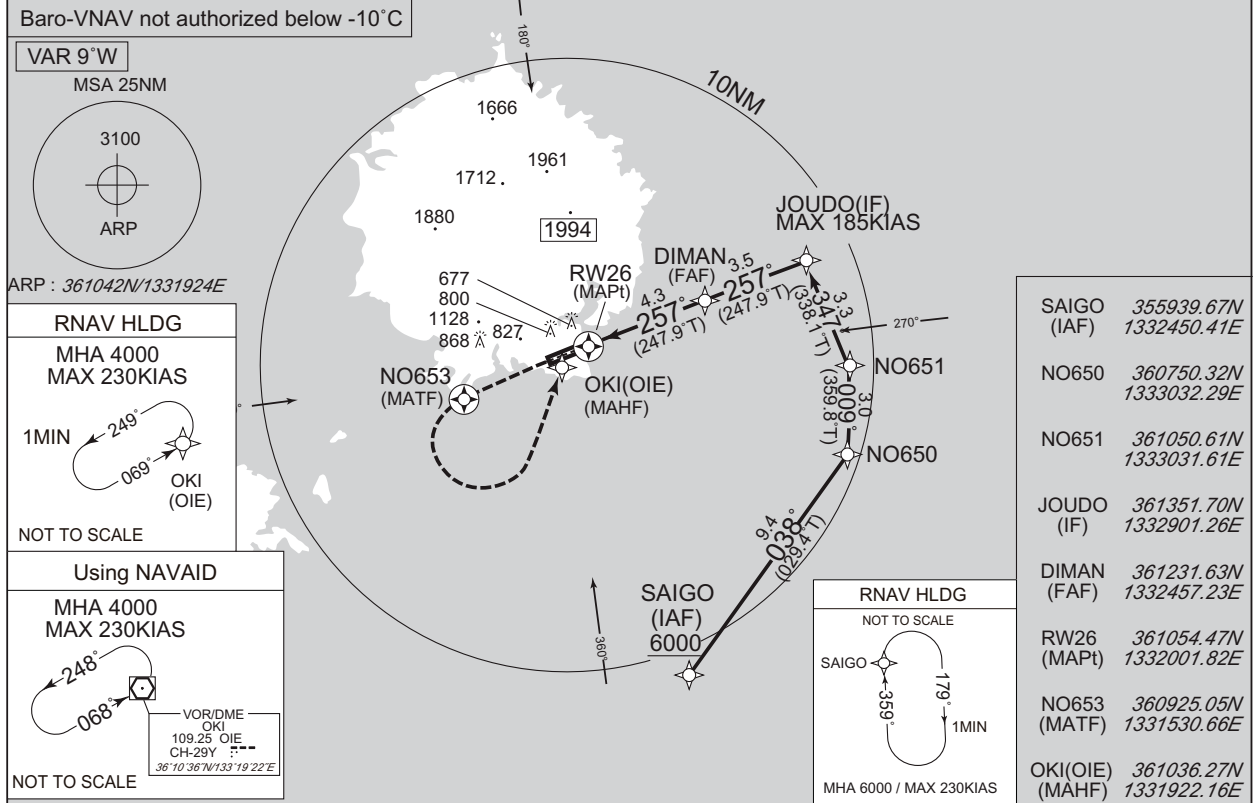

NM to Next Fix	MAPt	3	4	FAF
ALT (3.0° APCH Path)	-	1277	1595	1691

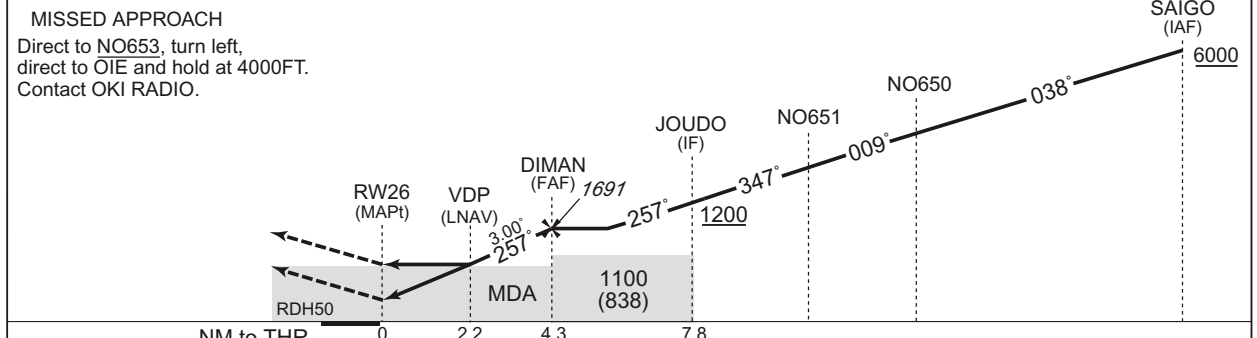

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 272		AD elev. 262				
CAT	LPV		LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	575 (303)	1500	792 (520)	1500	1000 (738)	1500	1000 (738)	1600
B	584 (312)							2400
C	594 (322)	1800	2000	2000	2000	2000	2000	3200
D	604 (332)	2000						3200

Circling to SOUTH side of RWY only.
MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : FREQ for KOBE CONTROL.

INSTRUMENT APPROACH CHART

RJNO / OKI

RNP RWY26

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+01168
SBAS service provider identifier	2	FPAP latitude	361030.0320N
Airport identifier	RJNO	FPAP longitude	1331847.7060E
Runway	26	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M26A	∠ length offset	0000
LTP/FTP latitude	361054.4595N	HAL	40.0
LTP/FTP longitude	1332001.8525E	VAL	50.0
CRC remainder	BB23D7F9		

Required additional data

LTP/FTP orthometric height	82.9
----------------------------	------

CHANGE : FAS DATA BLOCK, Required additional data established.

RJNO / OKI

Visual REP




CHANGE : Call sign(REMOTE→RADIO).

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
ポイント アルファ Point Alfa	212°T / 10.0NM	海上 Over the sea
ポイント ブラボー Point Bravo	193°T / 10.0NM	海上 Over the sea
ポイント チャーリー Point Charlie	149°T / 10.0NM	空港標点と倉吉市(JR倉吉駅)とを結ぶ直線上 On the straight line connecting ARP and Kurayoshi City.(JR Kurayoshi Station)

RJNO / OKI

LDG CHART

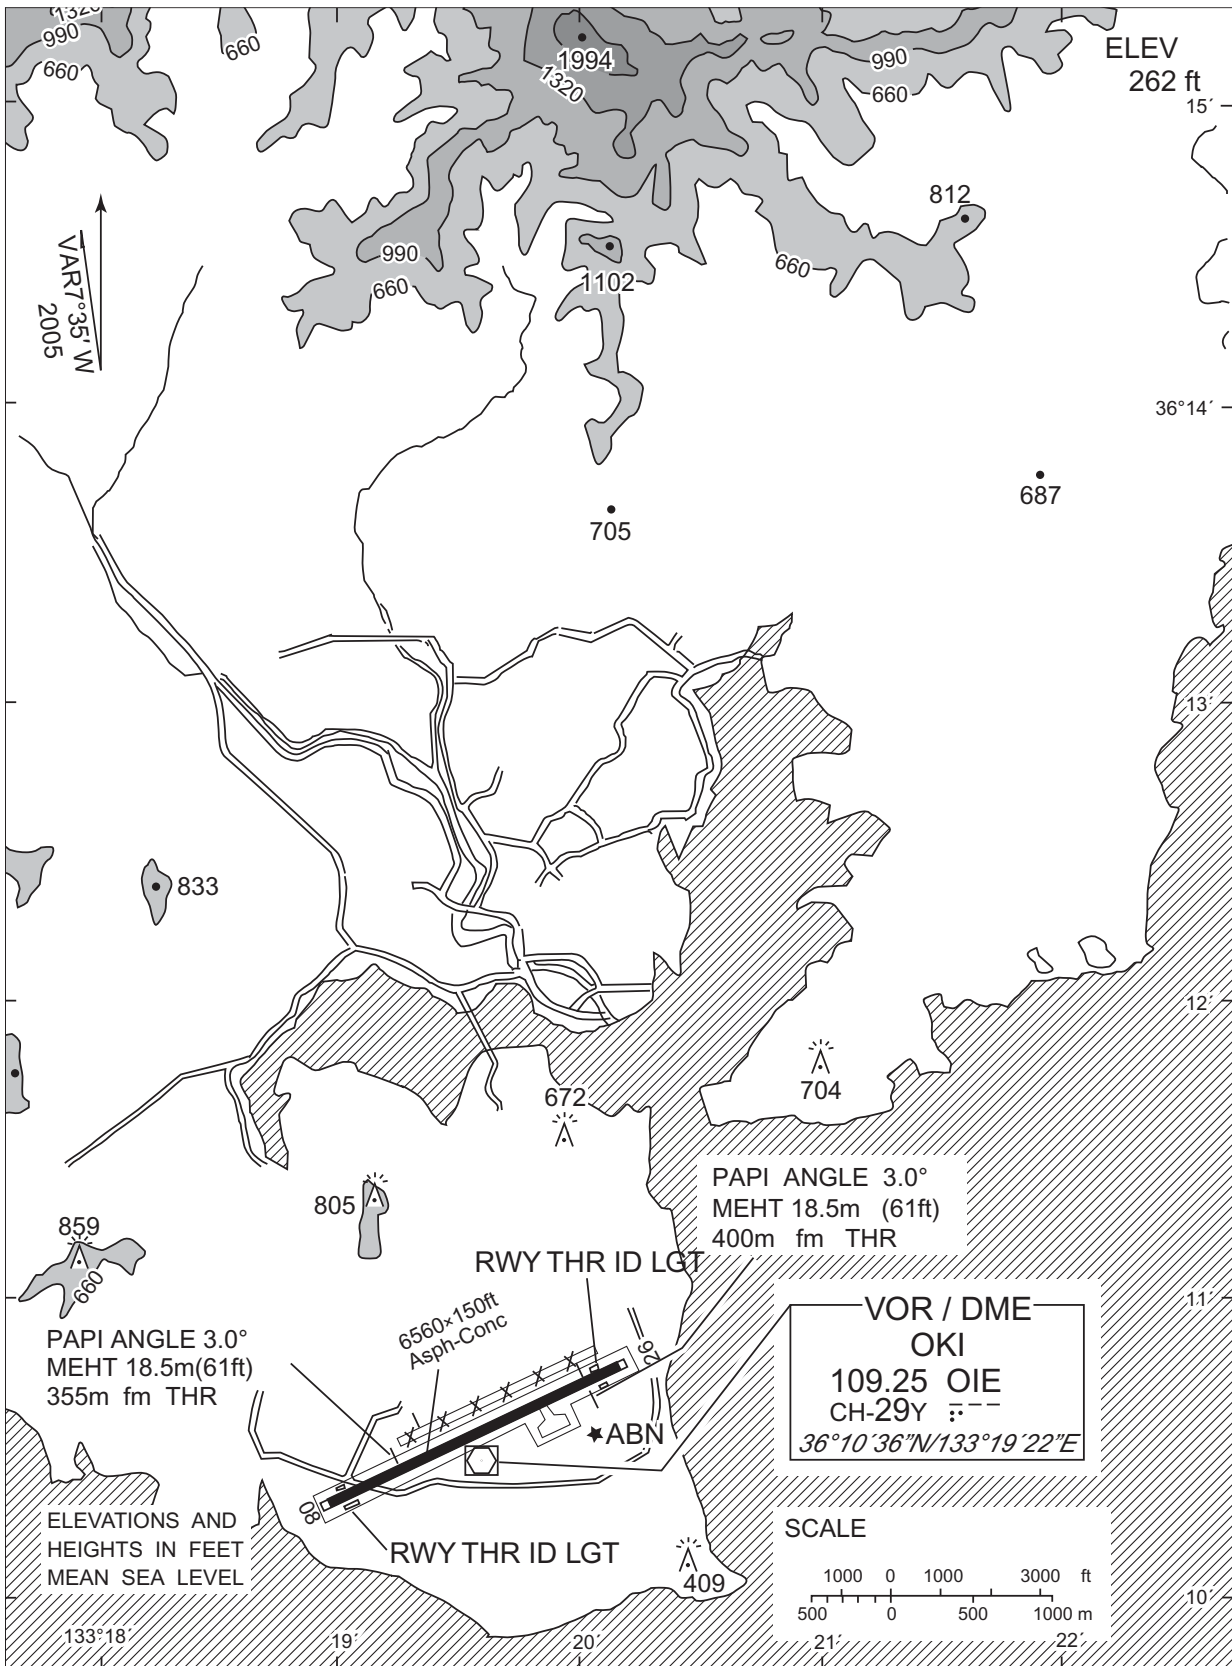

CHANGE : OBST ALT.

注： 隠岐空港の北側に廃止された滑走路が(なお、禁止標識が6カ所設置されている)視認できる状態であるので、隠岐空港に着陸する航空機は当該滑走路と誤認しないように注意すること。

NOTE: There is remained the abolished runway with 6 closed markings at north side of Oki Airport. As the abolished runway in sharp is visible, the aircraft which will land on Oki airport shall pay a special attention not to confuse the runway.

RJNO / OKI

Minimum Vectoring Altitude CHART

