


AERODROME CHART



TOKYO INTERNATIONAL AIRPORT  
ELEV 6.4m(21ft)

**HS**

HS: HOT SPOT / See RJTT AD2.20

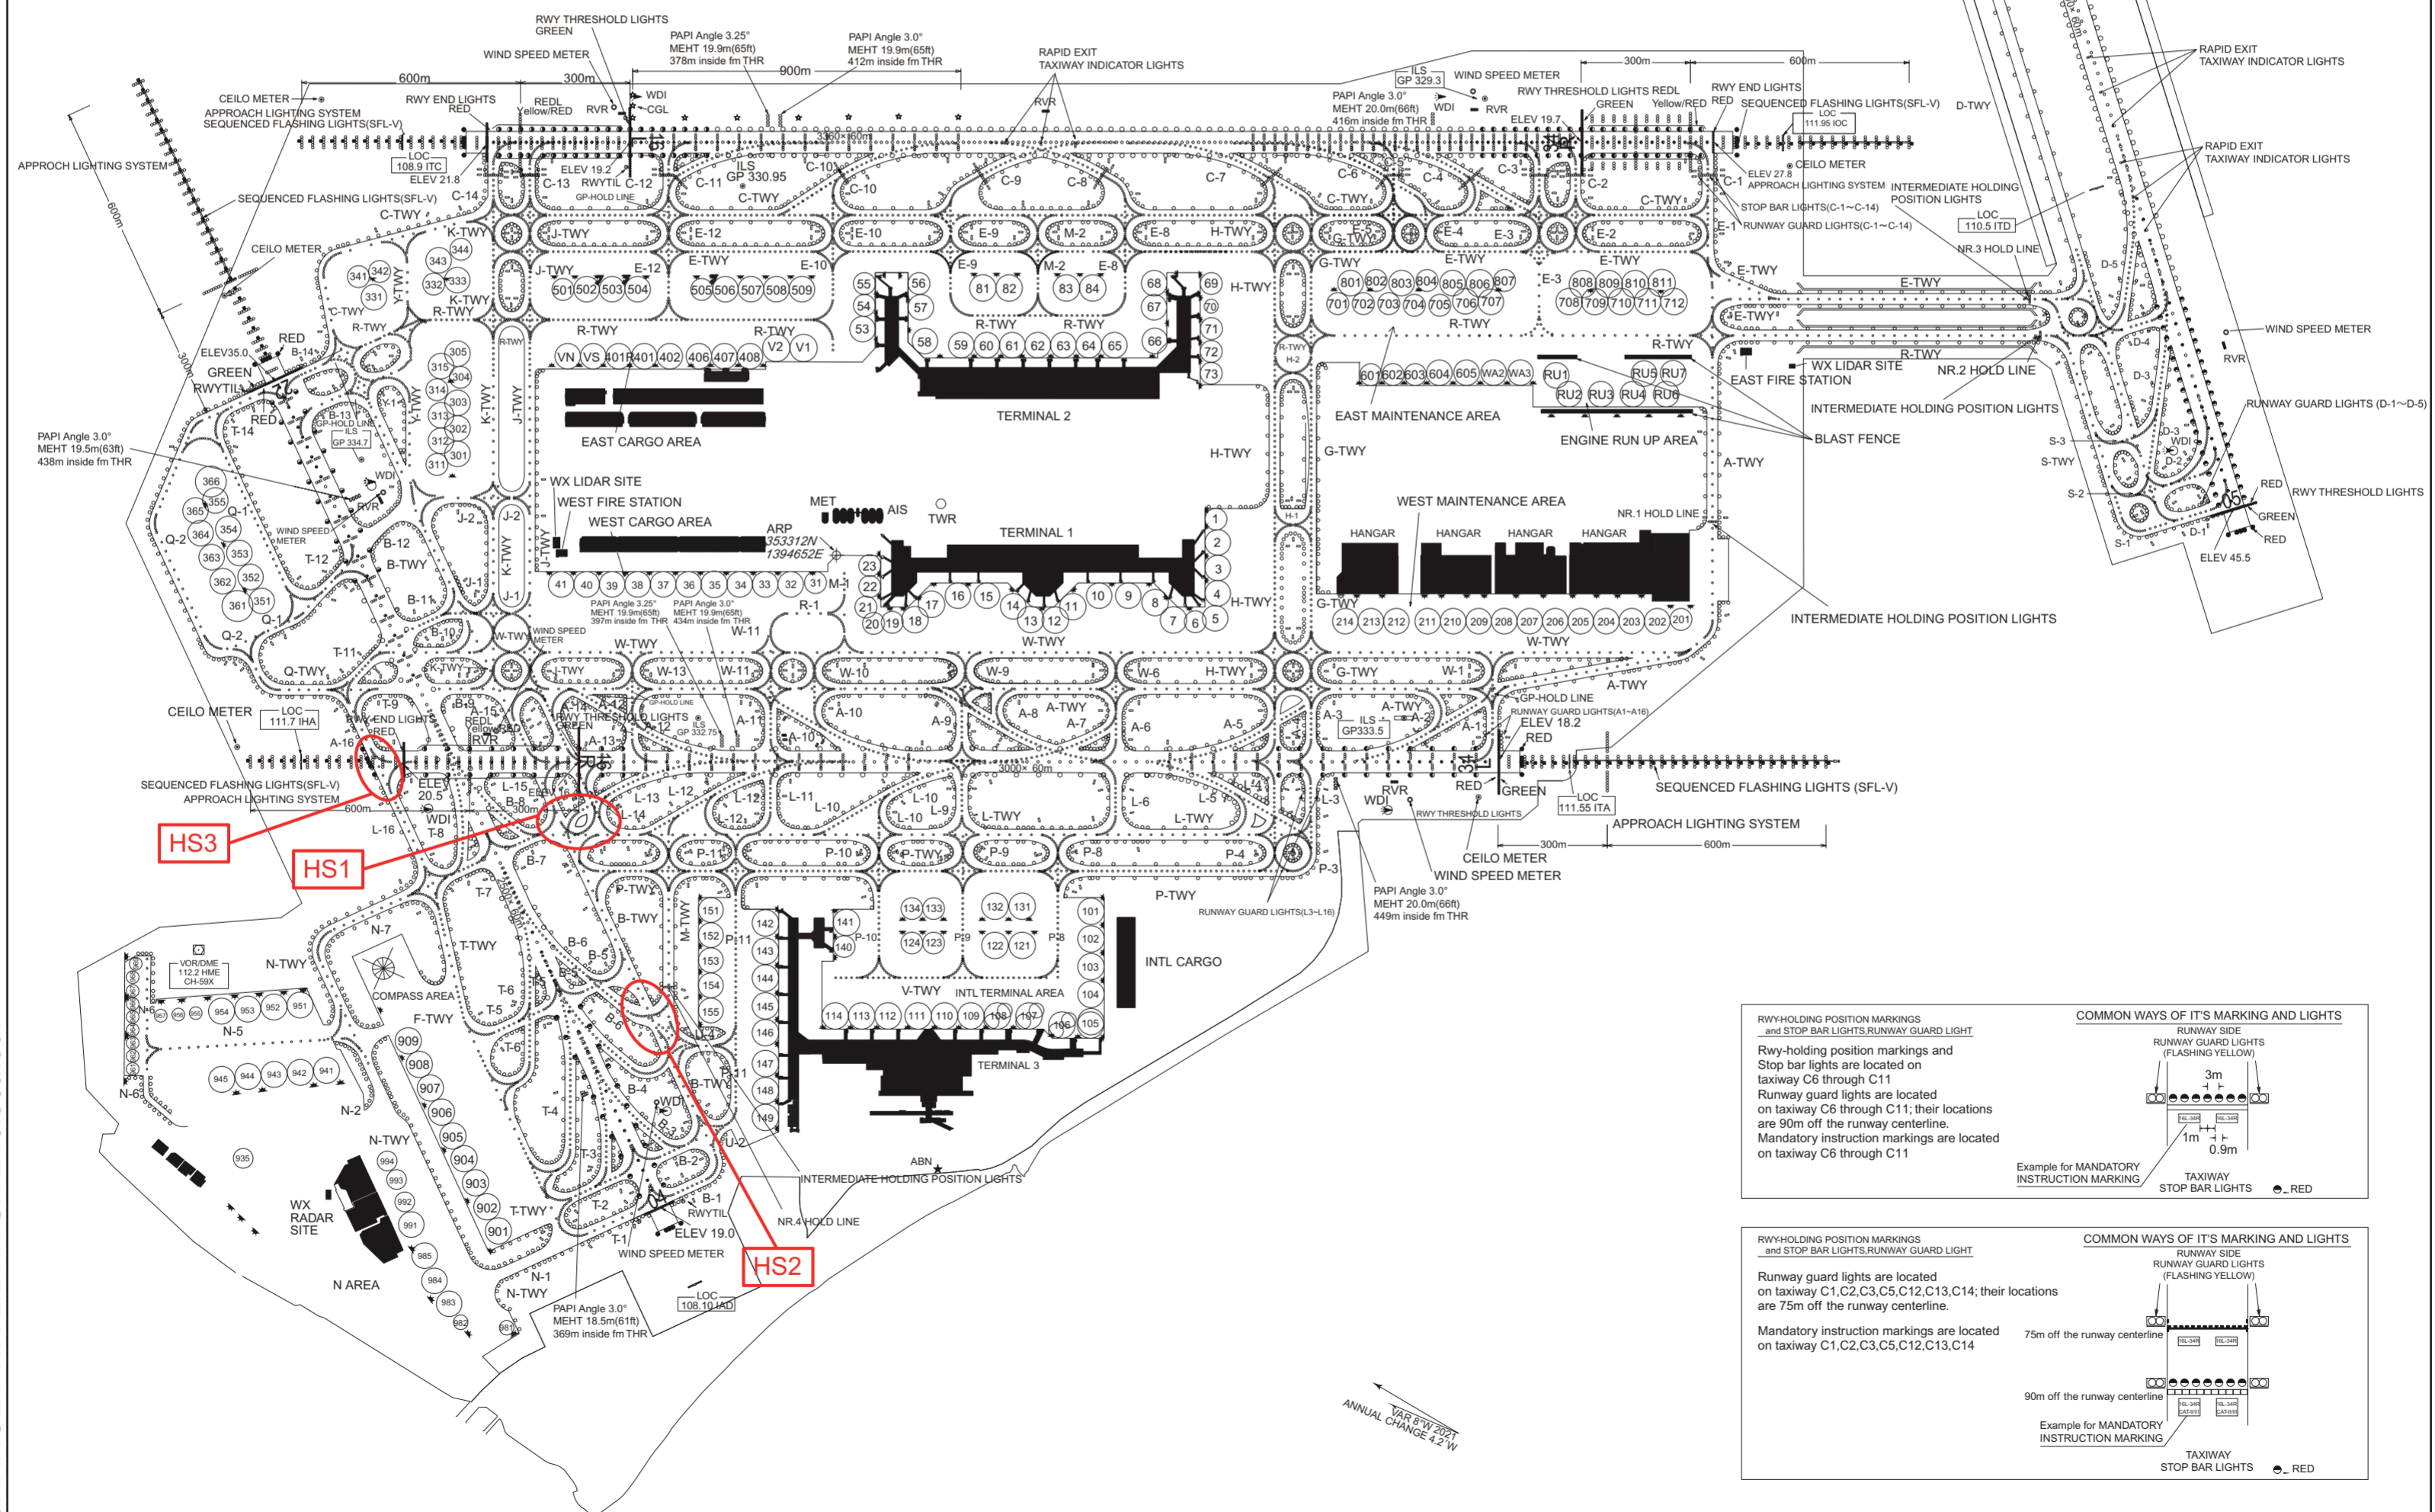


CHANGE : WX LIDAR SITE relocated.

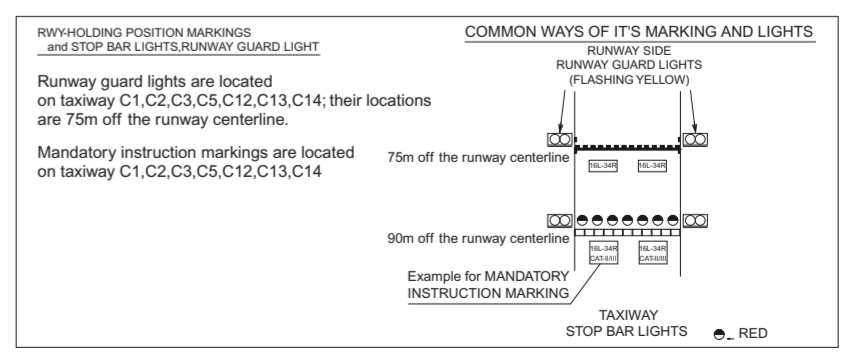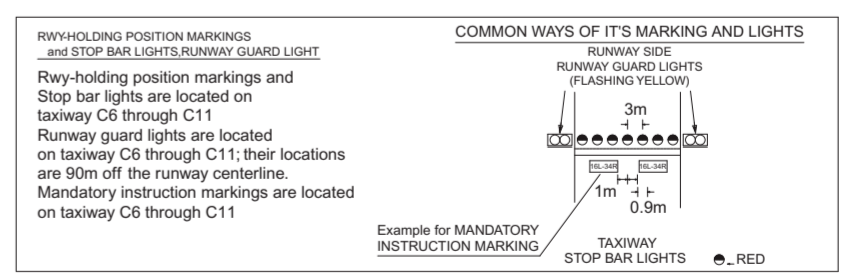

TAR 8/17/2021  
ANNUAL CHANGE 4.2 W

CHANGE : TWY edge line for L, L13, L14.

TOKYO INTL AP  
ELEV 6.4m(21ft)

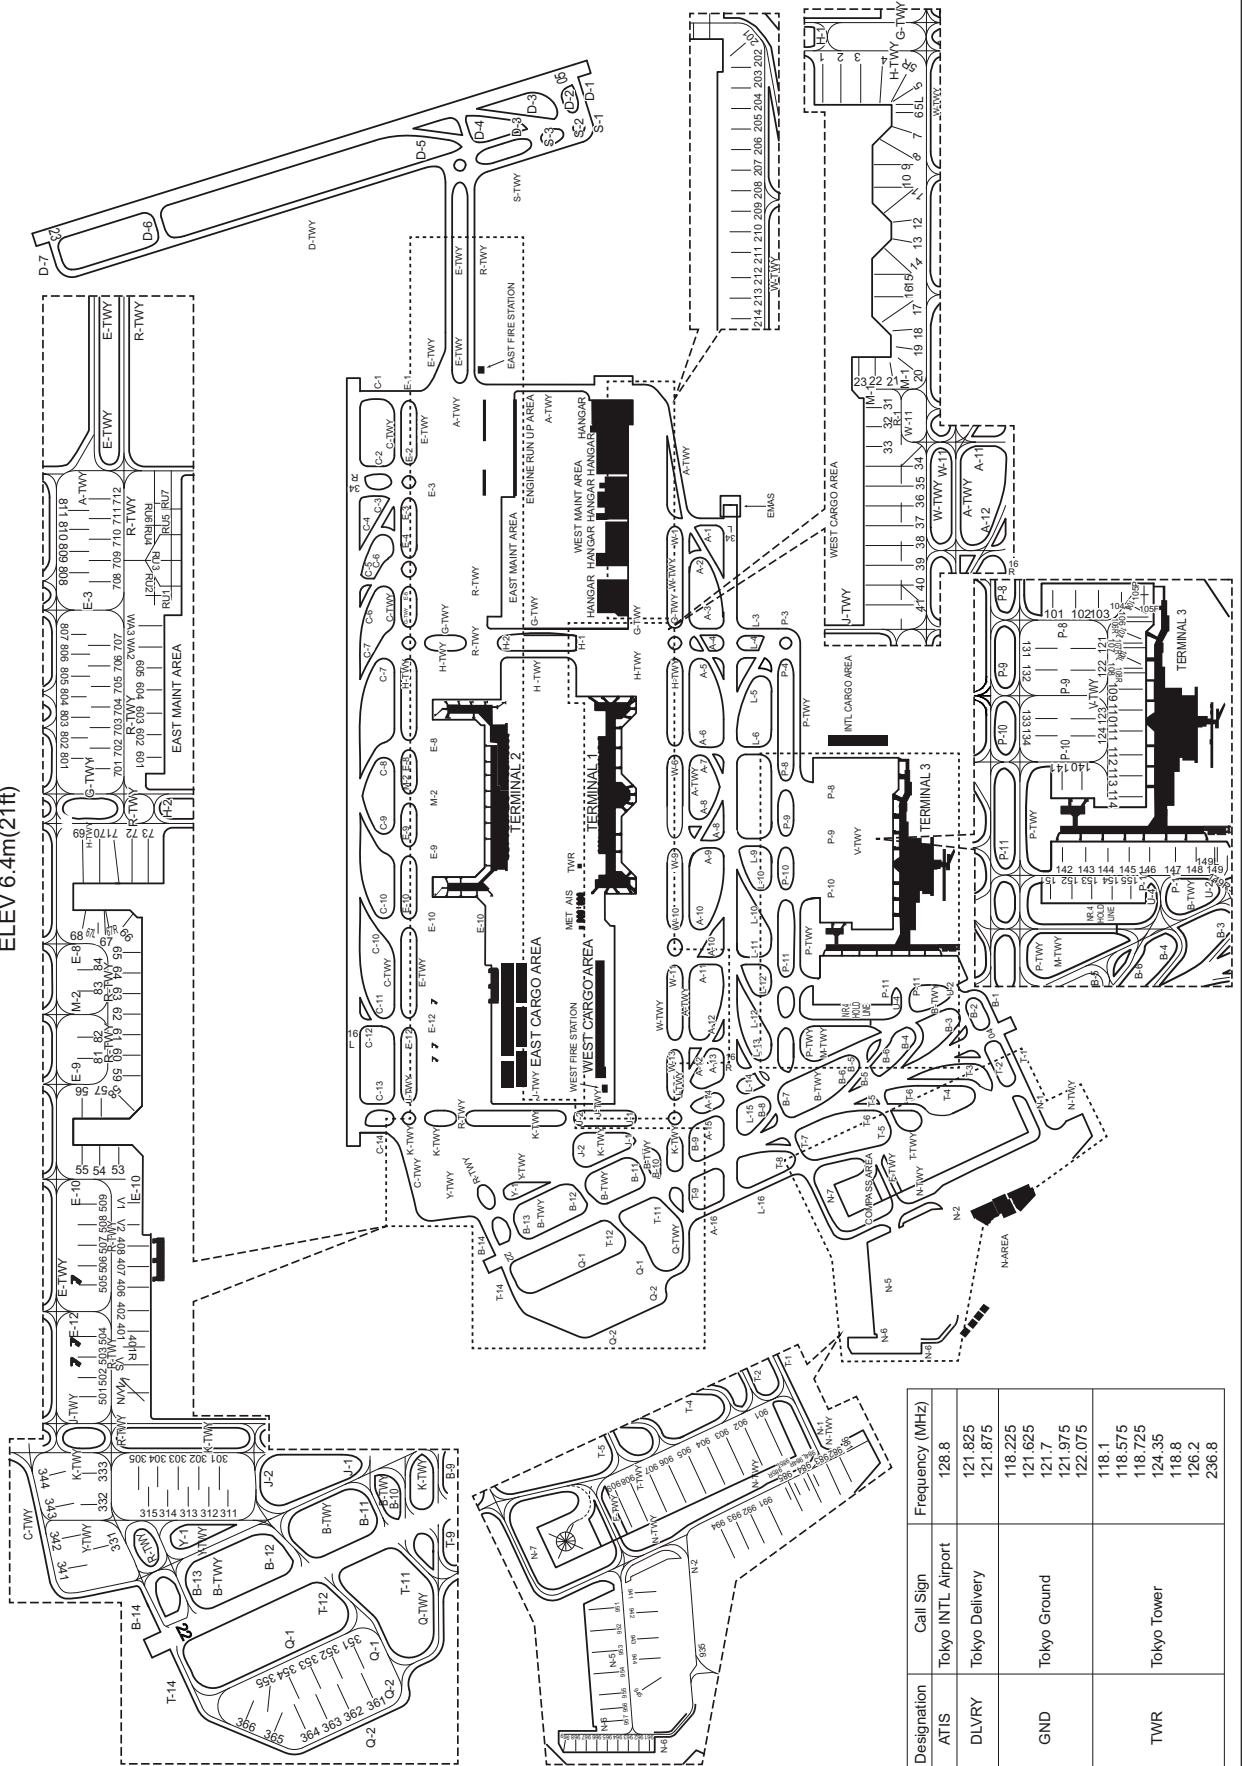


Designation	Call Sign	Frequency (MHz)
ATIS	Tokyo INTL Airport	128.8
DLVRY	Tokyo Delivery	121.825 121.875
GND	Tokyo Ground	118.225 121.625 121.7 121.975 122.075
TWR	Tokyo Tower	118.1 118.575 118.725 124.35 118.8 126.2 236.8

**INTENTIONALLY LEFT BLANK**

TAXIING GUIDE LINE AND PARKING AREAS

HS  
HS: HOT SPOT / See RJTT AD2.20


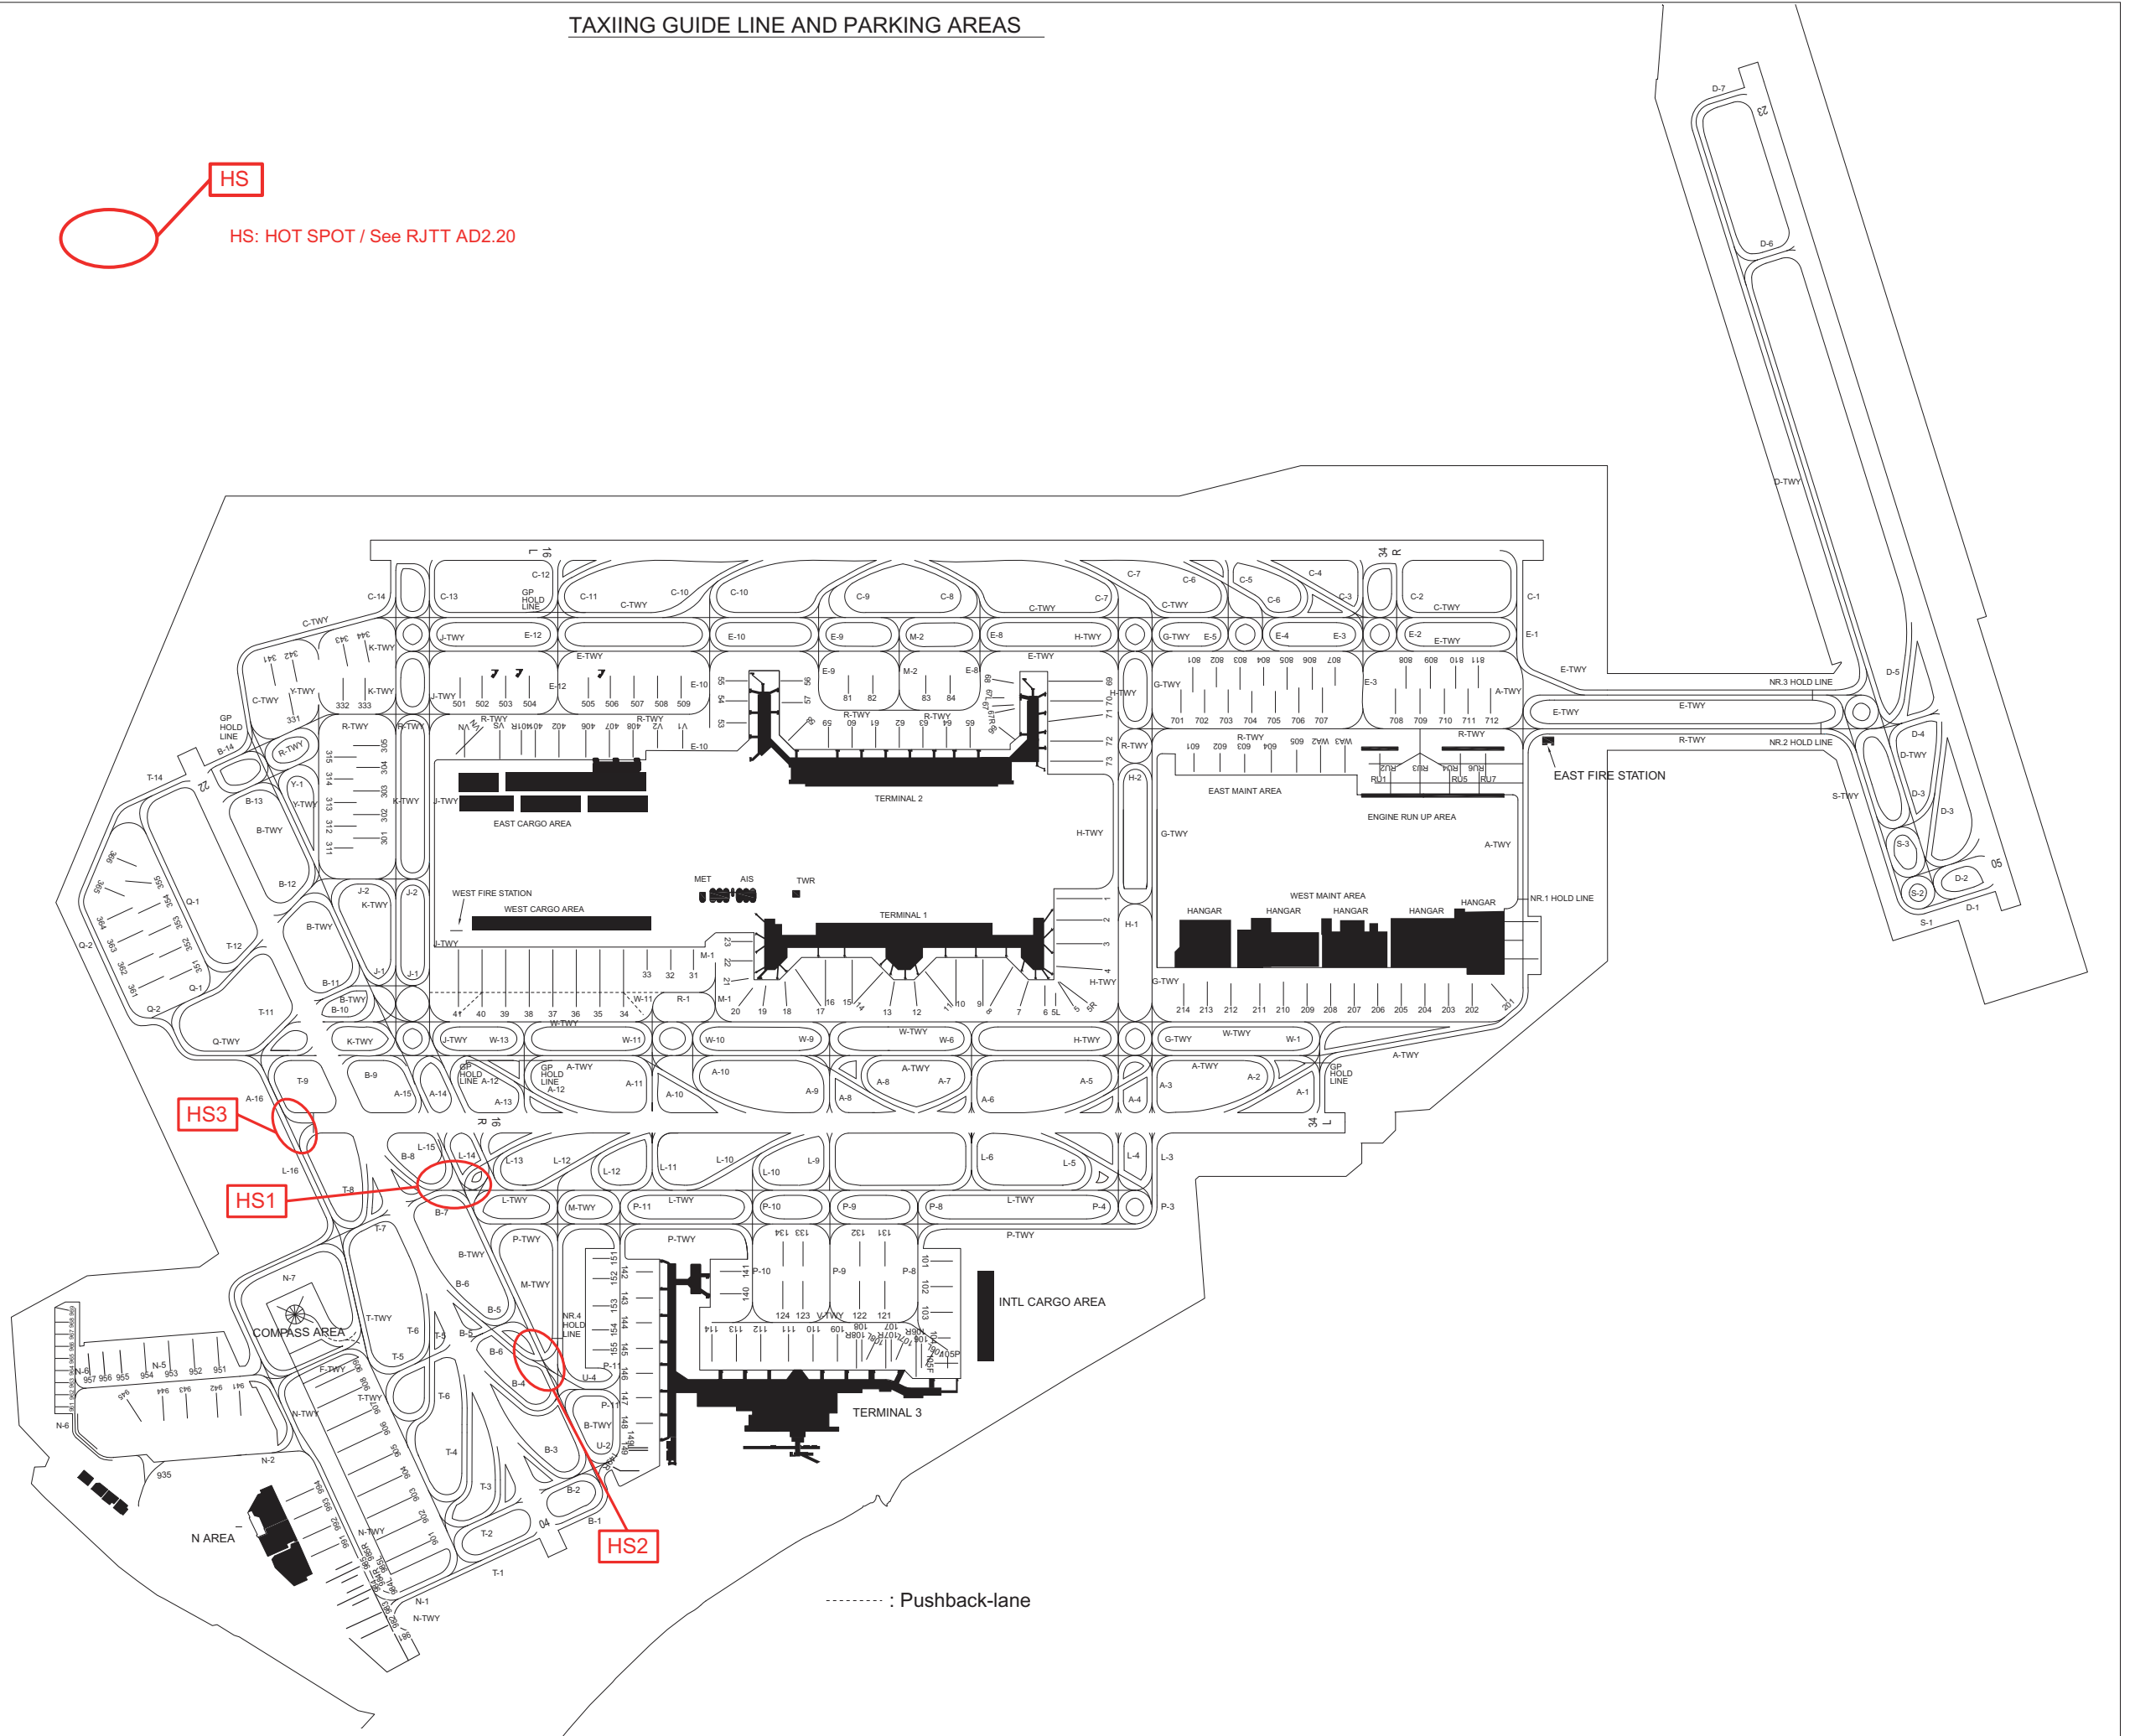


CHANGE : TWY edge line for L, L13, L14.


DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC  
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8°W - JUL 2022

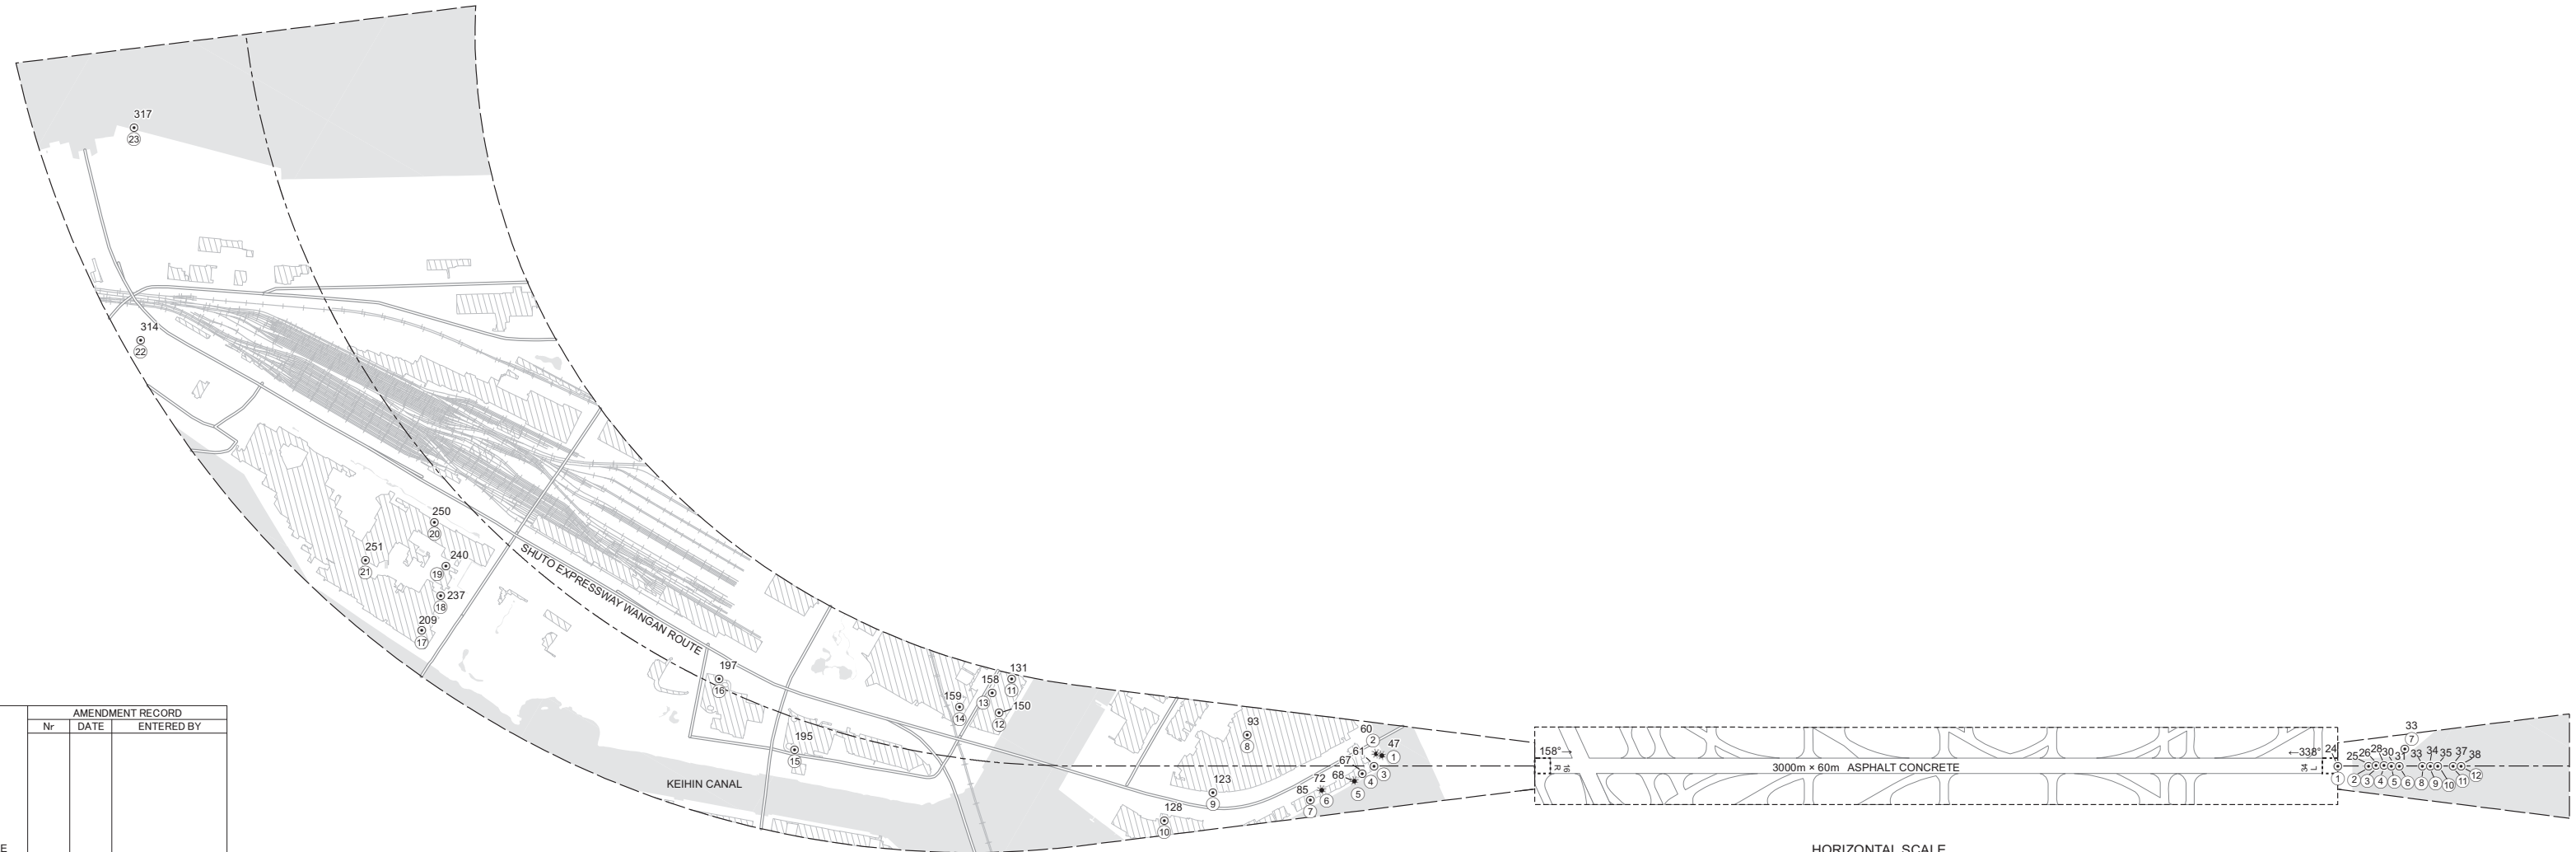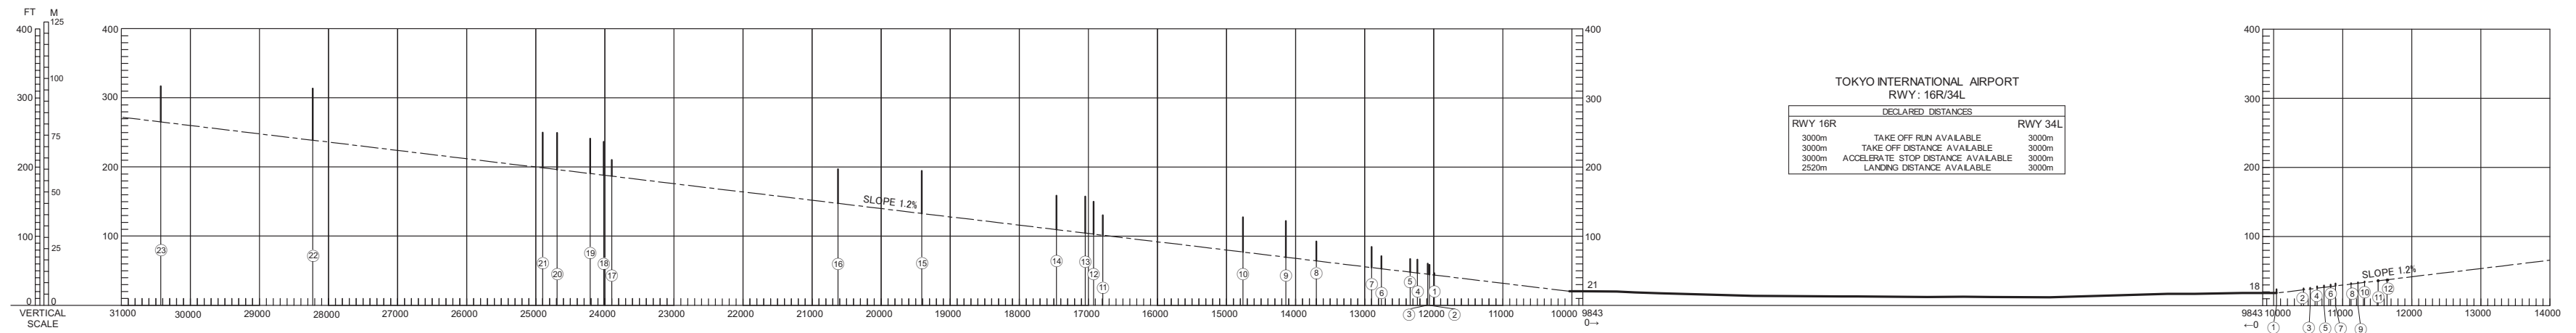

LEGEND		AMENDMENT RECORD		
①	IDENTIFICATION NUMBER	Nr	DATE	ENTERED BY
⊙	POLE, TOWER, SPIRE, ANTENNA, ETC			
*	TREE			
—+—+—	RAILROAD			
—+—+—	TRANSMISSION LINE OR OVERHEAD CABLE			
△	TRIANGULATION POINT			
★	AERONAUTICAL GROUND LIGHT			
■	BUILDING OR LARGE STRUCTURE			
—	CONTOURS(M)			
—	LEVEE			
—	RIVER			

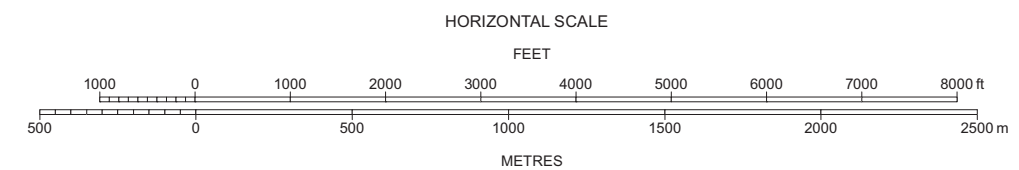


CHANGE : Update.

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC  
Transverse Mercator Projection


AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8°W - JUL 2022

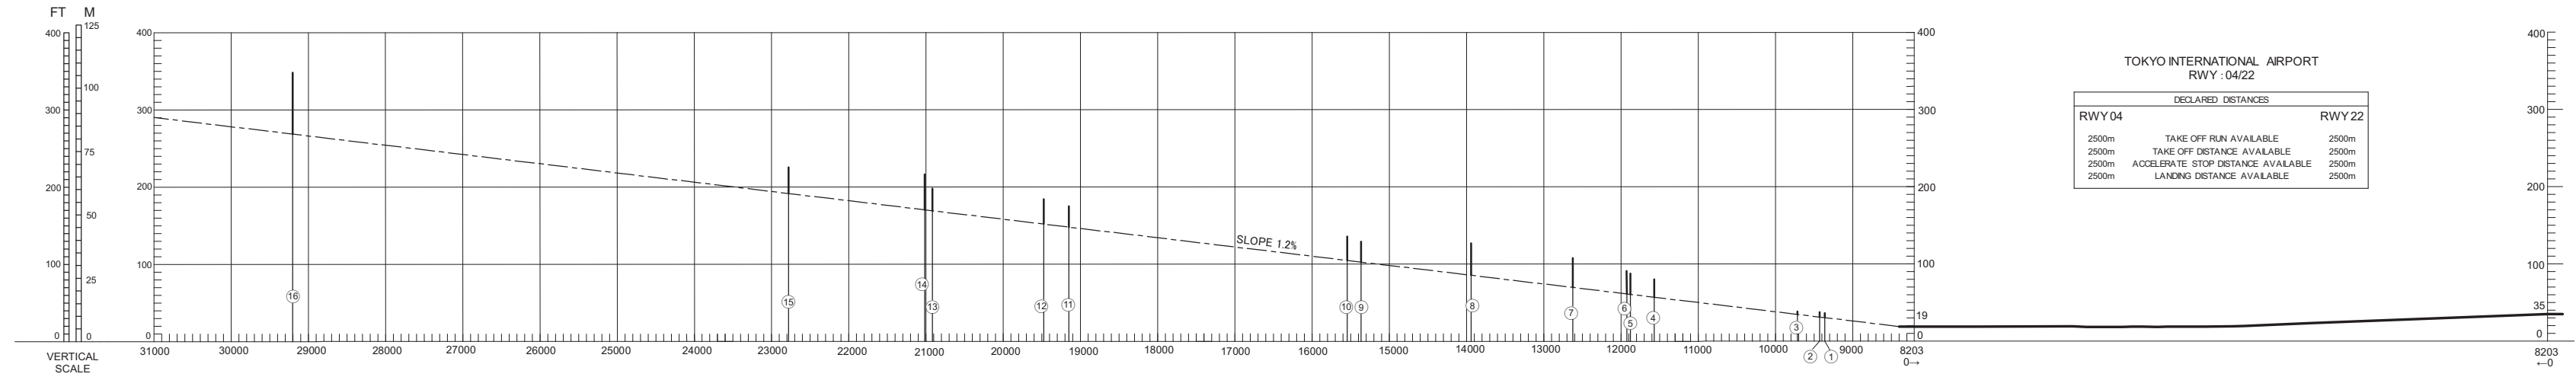

TOKYO INTERNATIONAL AIRPORT  
RWY : 04/22

DECLARED DISTANCES	
RWY 04	RWY 22
2500m	TAKE OFF RUN AVAILABLE 2500m
2500m	TAKE OFF DISTANCE AVAILABLE 2500m
2500m	ACCELERATE STOP DISTANCE AVAILABLE 2500m
2500m	LANDING DISTANCE AVAILABLE 2500m

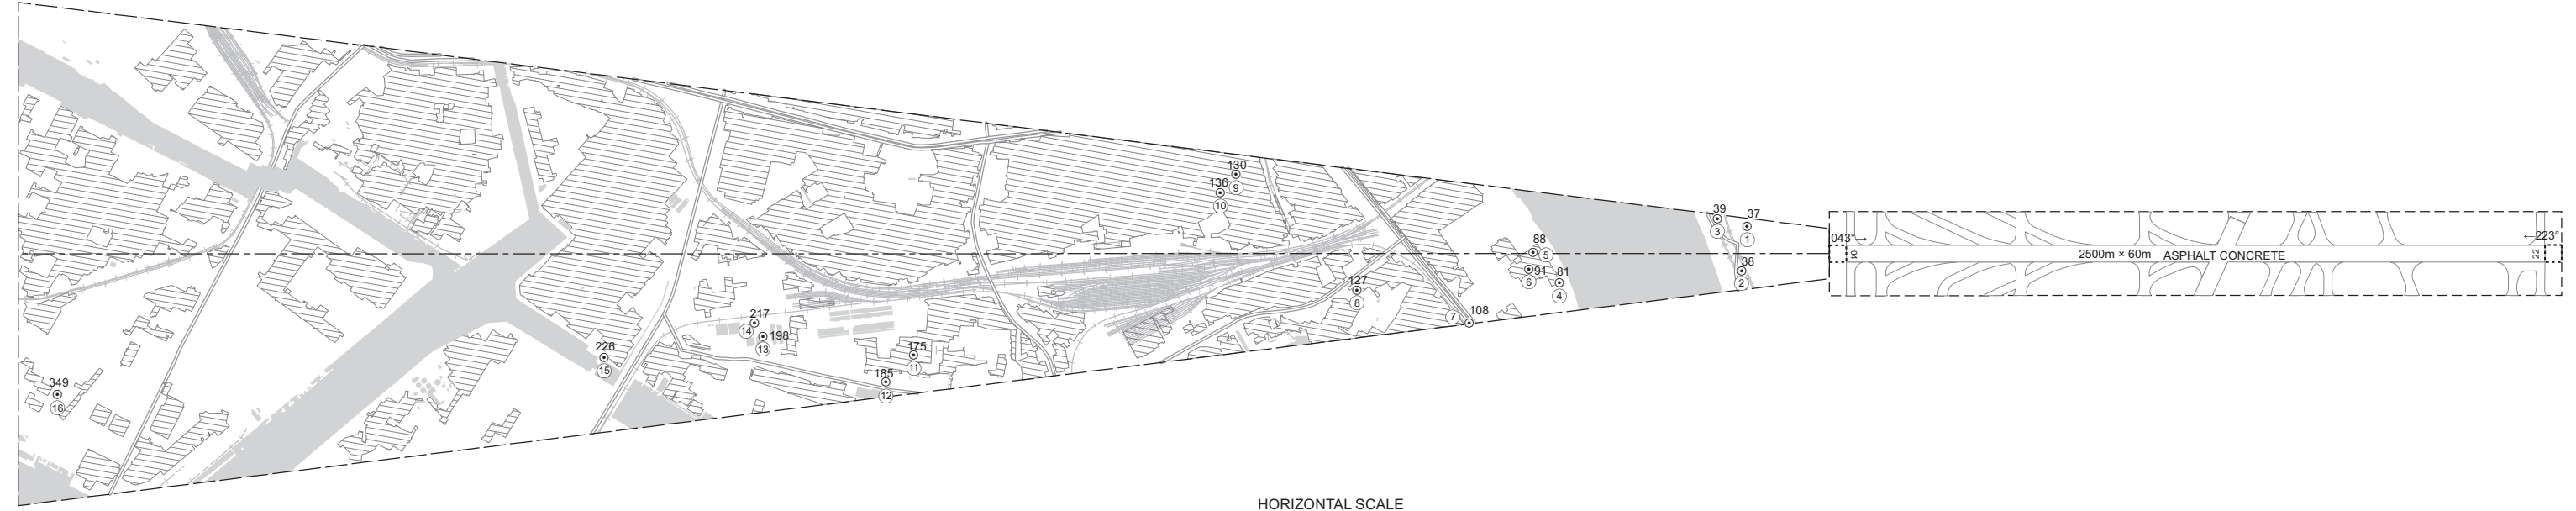

LEGEND	AMENDMENT RECORD	
	Nr	DATE ENTERED BY
① IDENTIFICATION NUMBER		
⊙ POLE, TOWER, SPIRE, ANTENNA, ETC		
* TREE		
--- LEVEE		
--- RAILROAD		
--- RIVER		
--- TRANSMISSION LINE OR OVERHEAD CABLE		
△ TRIANGULATION POINT		
★ AERONAUTICAL GROUND LIGHT		
■ BUILDING OR LARGE STRUCTURE		
--- CONTOURS(m)		



CHANGE : Update.

測量法に基づく国土地理院長承認(使用) R 3Jh352、国土数値情報(緊急輸送道路、鉄道)


DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC  
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8°W - JUL 2022

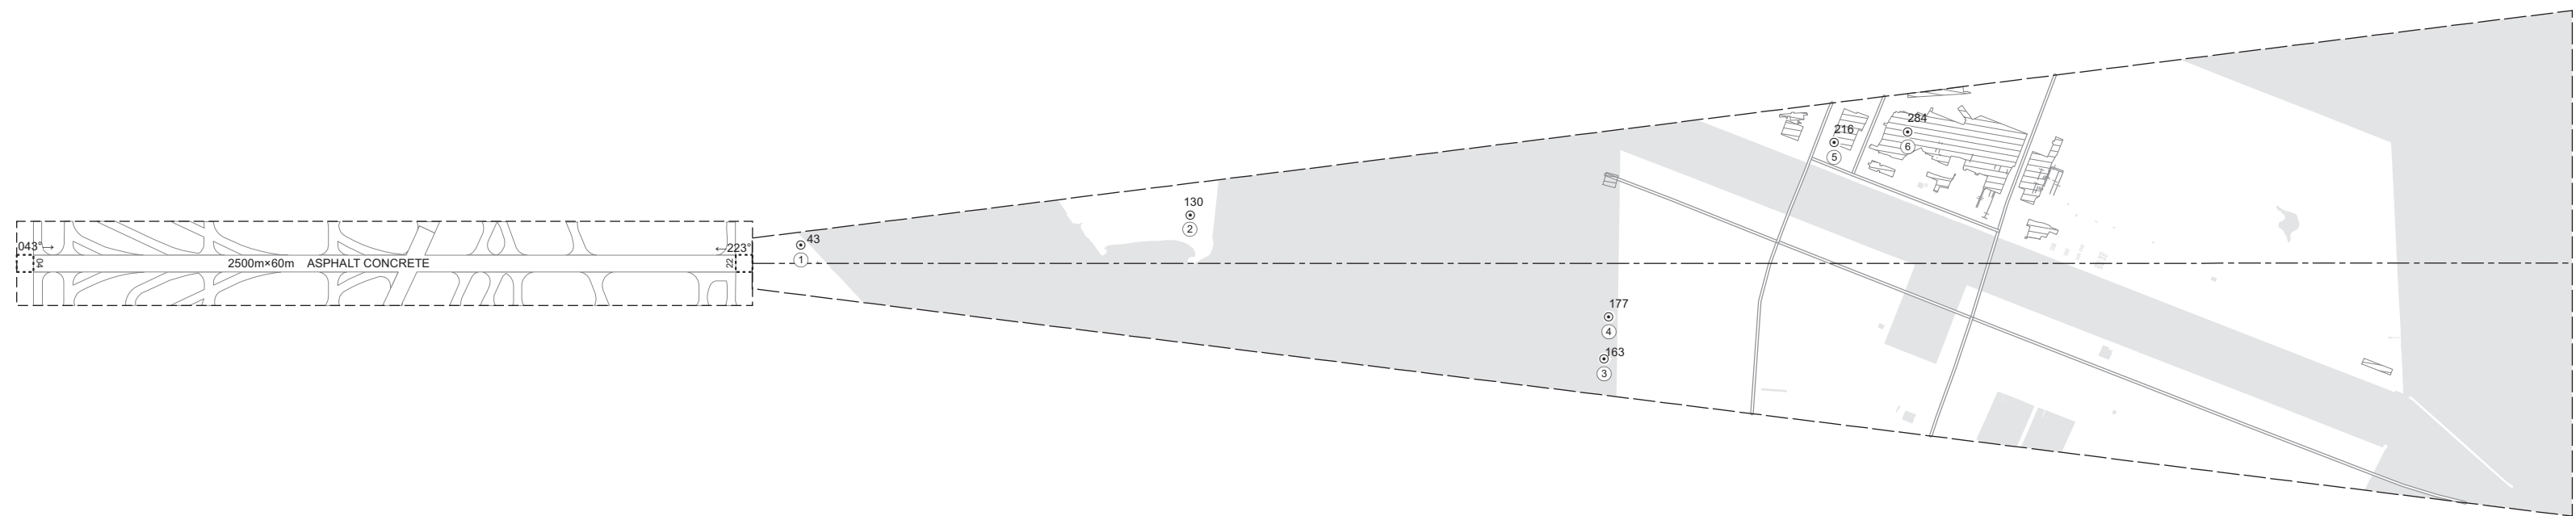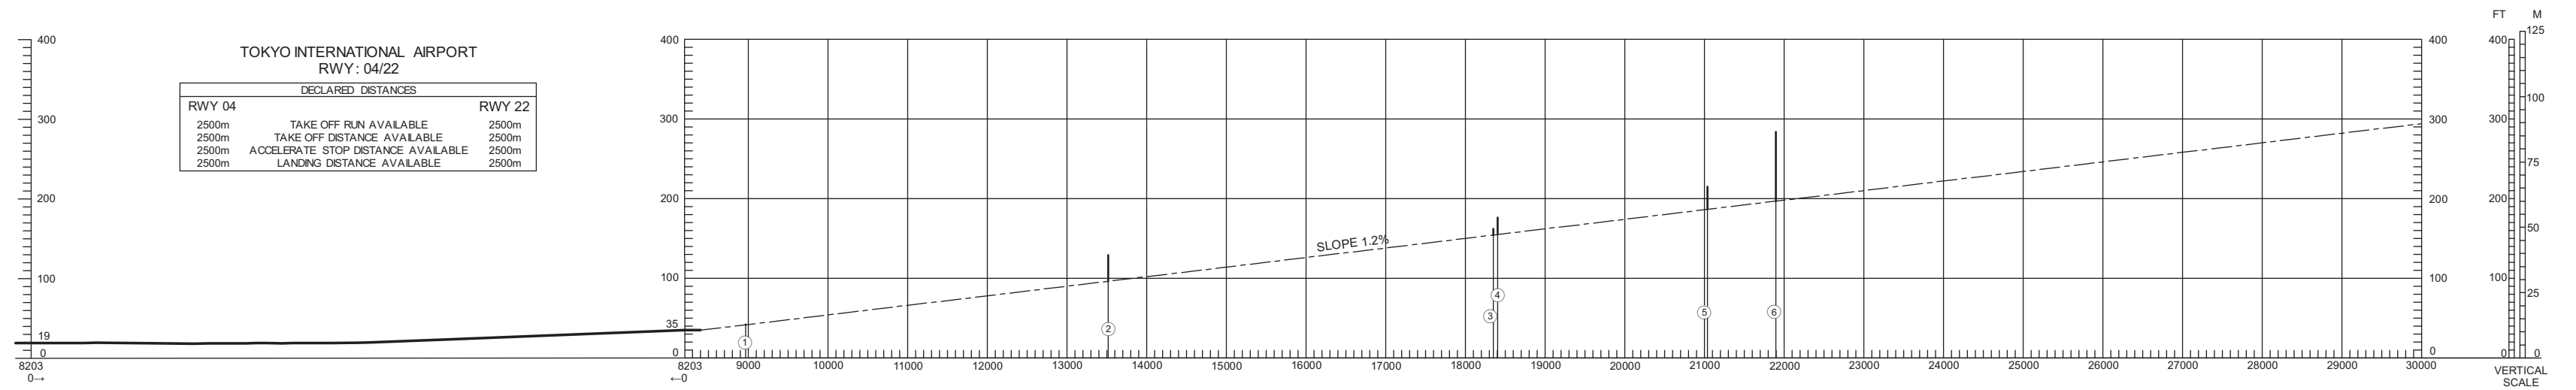

LEGEND	AMENDMENT RECORD		
	Nr	DATE	ENTERED BY
① IDENTIFICATION NUMBER			
⊙ POLE, TOWER, SPIRE, ANTENNA, ETC			
* TREE			
▬ RAILROAD			
▬ TRANSMISSION LINE OR OVERHEAD CABLE			
△ TRIANGULATION POINT			
★ AERONAUTICAL GROUND LIGHT			
■ BUILDING OR LARGE STRUCTURE			
⋯ CONTOURS(m)			

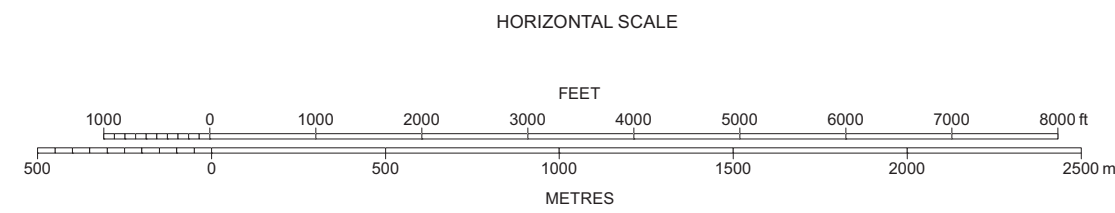


CHANGE : Update.

測量法に基づく国土地理院長承認(使用) R 3.36 352、国土数値情報(緊急輸送道路)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC  
Transverse Mercator Projection


AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8°W - JUL 2022

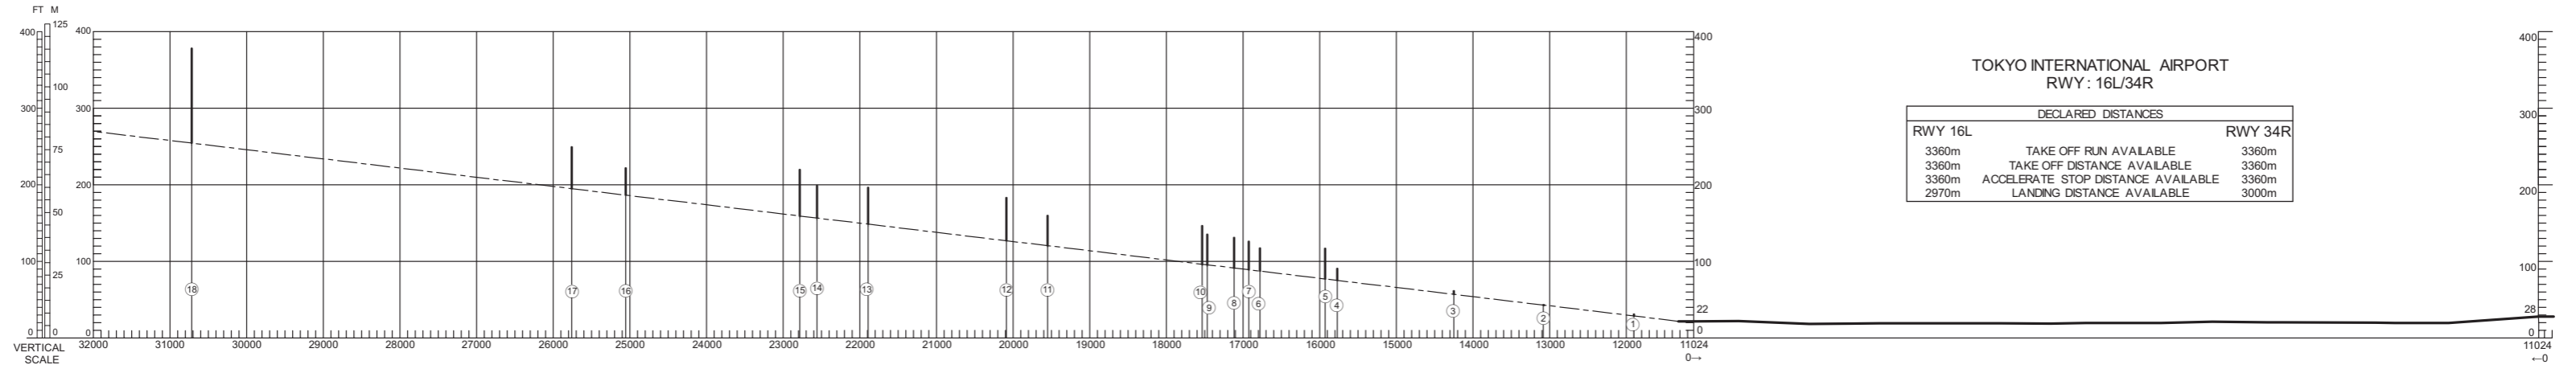

TOKYO INTERNATIONAL AIRPORT  
RWY : 16L/34R

DECLARED DISTANCES		
RWY 16L		RWY 34R
3360m	TAKE OFF RUN AVAILABLE	3360m
3360m	TAKE OFF DISTANCE AVAILABLE	3360m
3360m	ACCELERATE STOP DISTANCE AVAILABLE	3360m
2970m	LANDING DISTANCE AVAILABLE	3000m

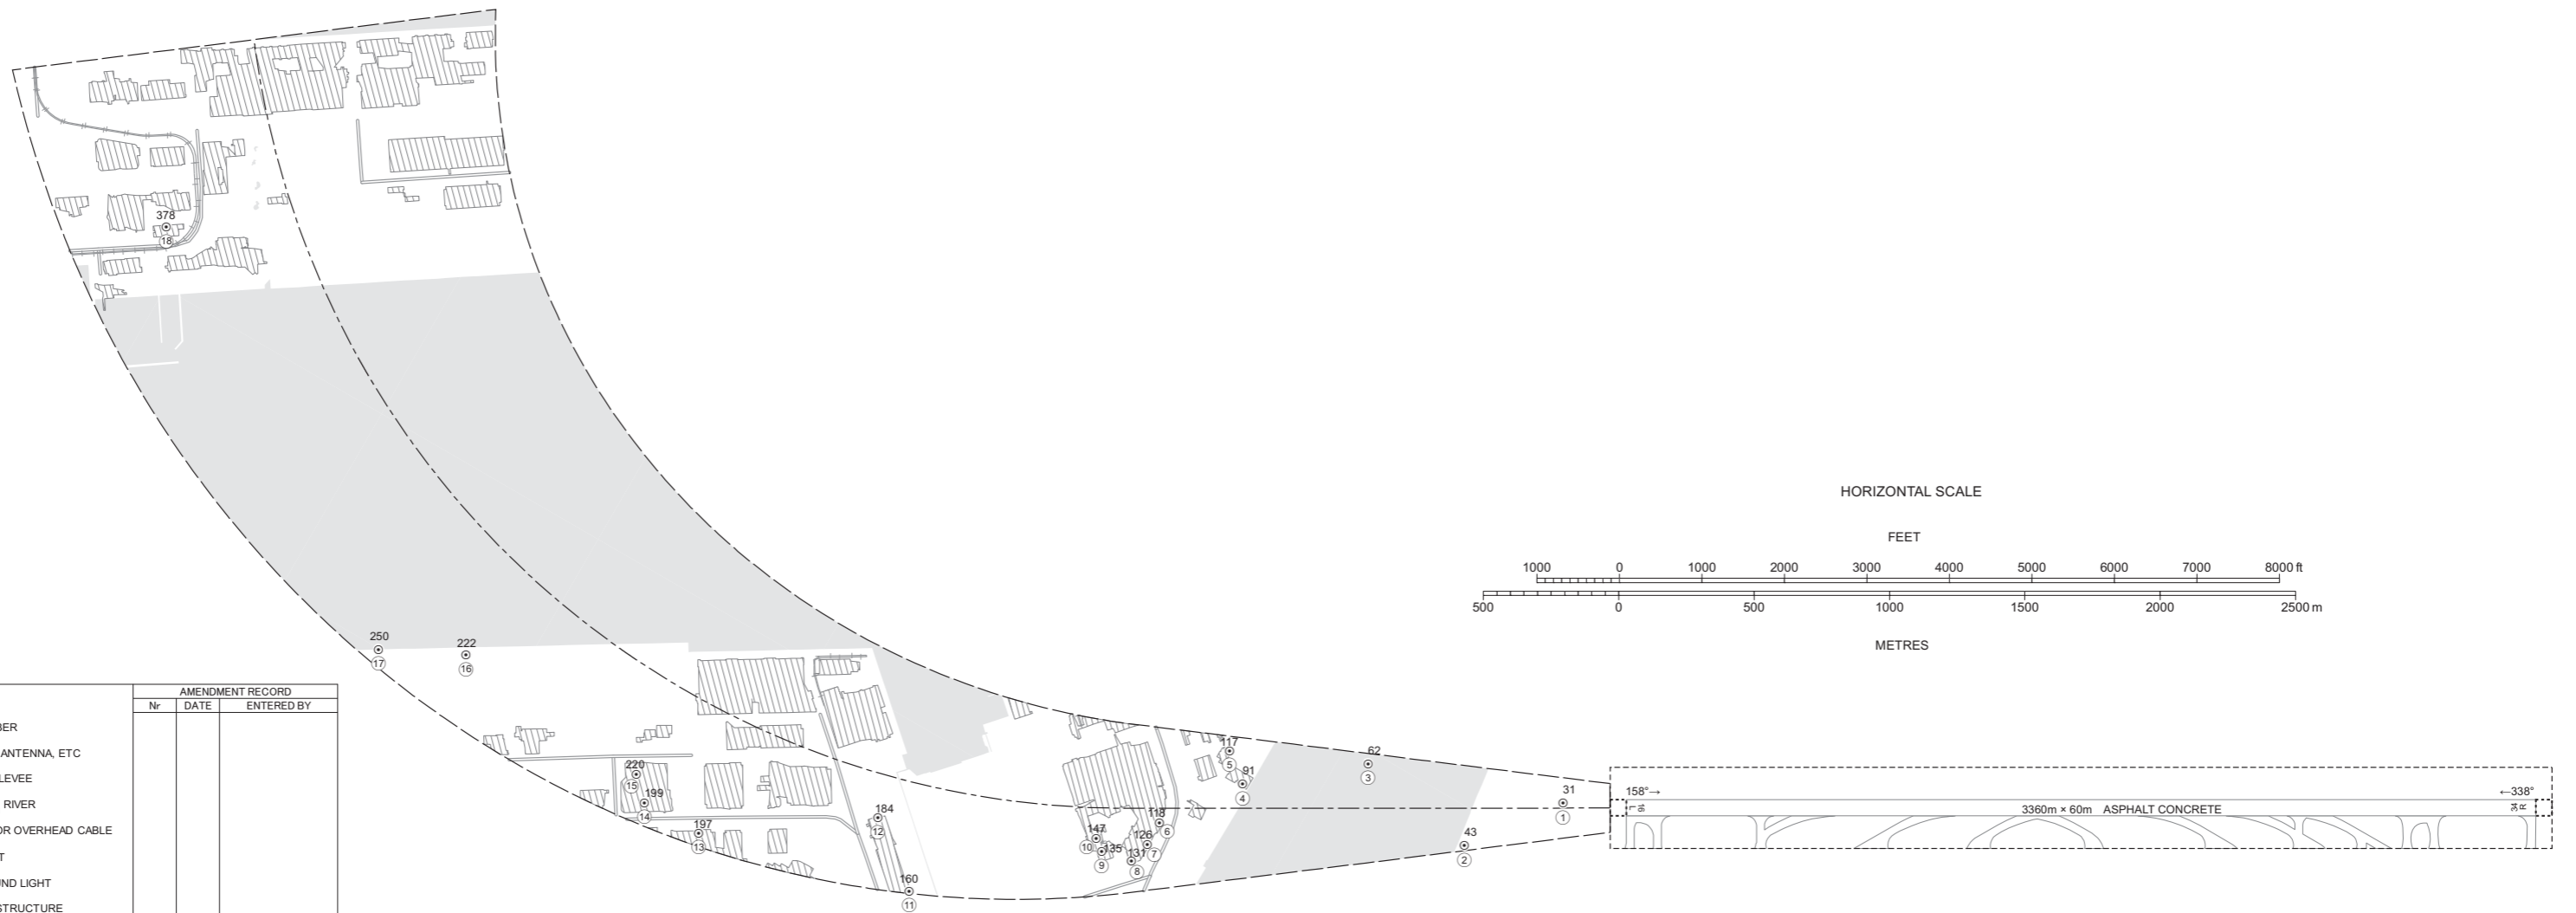

LEGEND		AMENDMENT RECORD		
		Nr	DATE	ENTERED BY
①	IDENTIFICATION NUMBER			
⊙	POLE, TOWER, SPIRE, ANTENNA, ETC			
*	TREE			
—+—+—	RAILROAD			
—+—+—	TRANSMISSION LINE OR OVERHEAD CABLE			
△	TRIANGULATION POINT			
★	AERONAUTICAL GROUND LIGHT			
■	BUILDING OR LARGE STRUCTURE			
—	CONTOURS(ft)			
—	LEVEE			
—	RIVER			

CHANGE : Update.



測量法に基づく国土院院長承認(使用) R 3.0h 352, 国土院情報(緊急輸送道路、鉄道)




DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC  
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8°W - JUL 2022

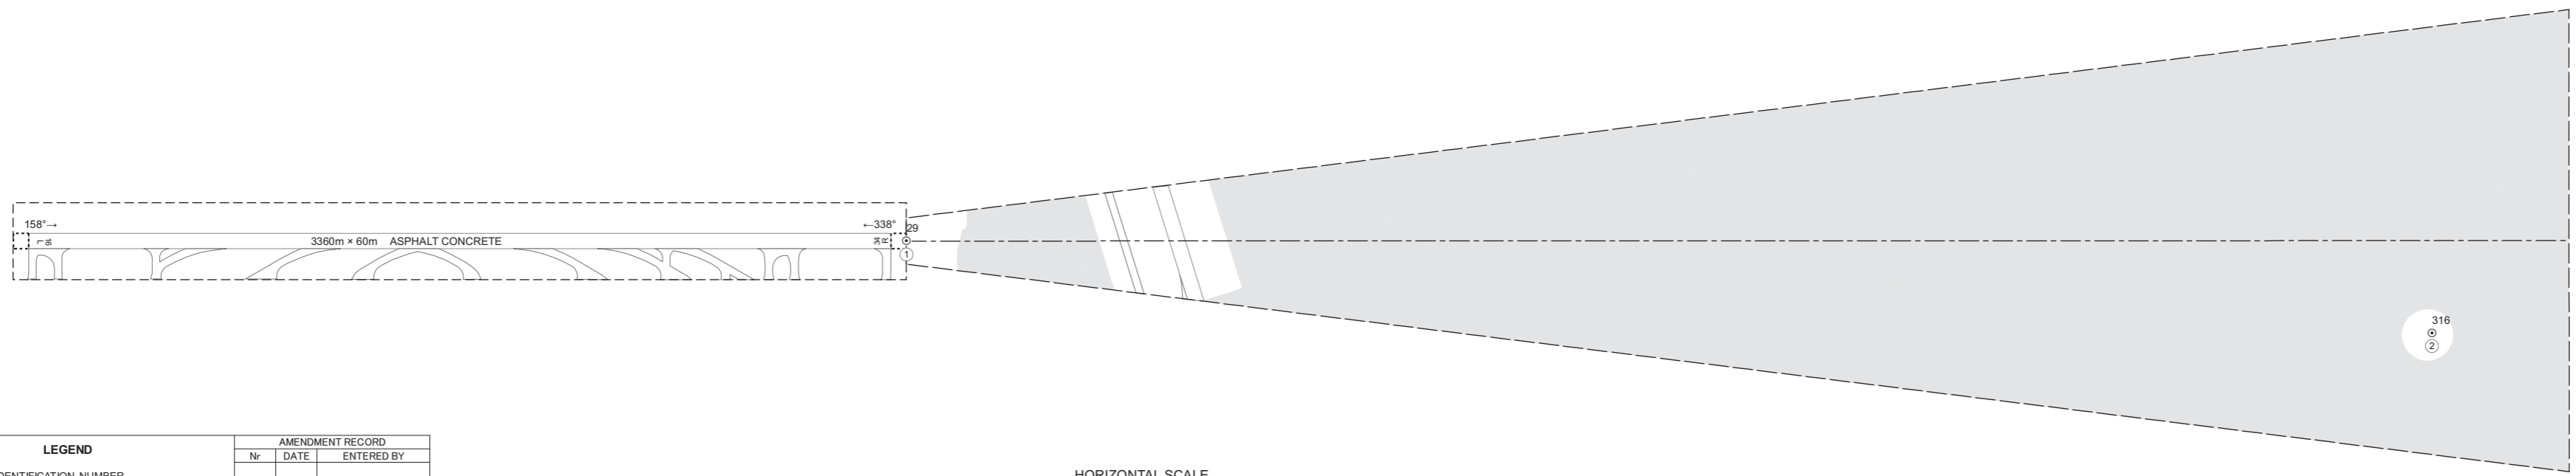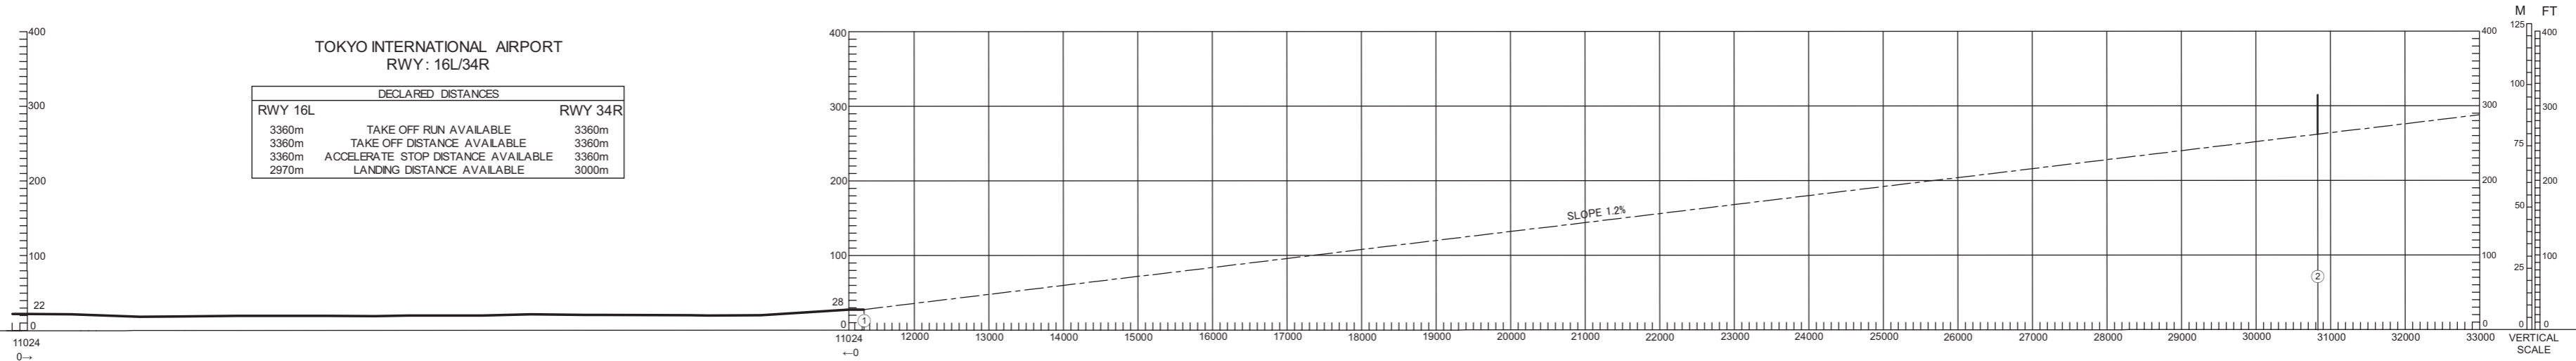

LEGEND	AMENDMENT RECORD		
	Nr	DATE	ENTERED BY
① IDENTIFICATION NUMBER			
⊙ POLE, TOWER, SPIRE, ANTENNA, ETC			
* TREE			
▬ LEVEE			
⊕ RAILROAD			
⊕ RIVER			
⊕ TRANSMISSION LINE OR OVERHEAD CABLE			
△ TRIANGULATION POINT			
★ AERONAUTICAL GROUND LIGHT			
■ BUILDING OR LARGE STRUCTURE			
⊕ CONTOURS(M)			

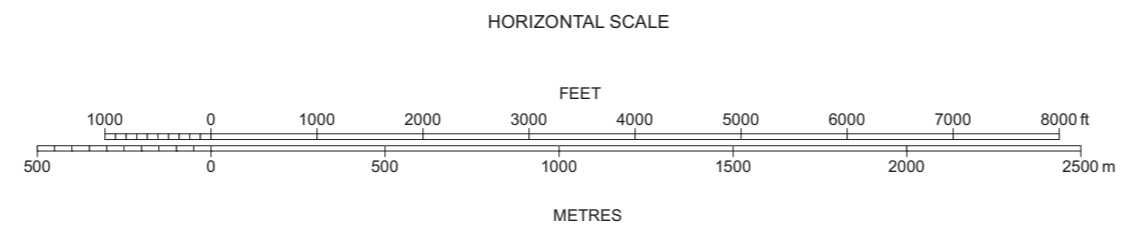



CHANGE : Update.

測量法に基づく国土地理院長承認(使用) R 3.8h 352


DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC  
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8°W - JUL 2022

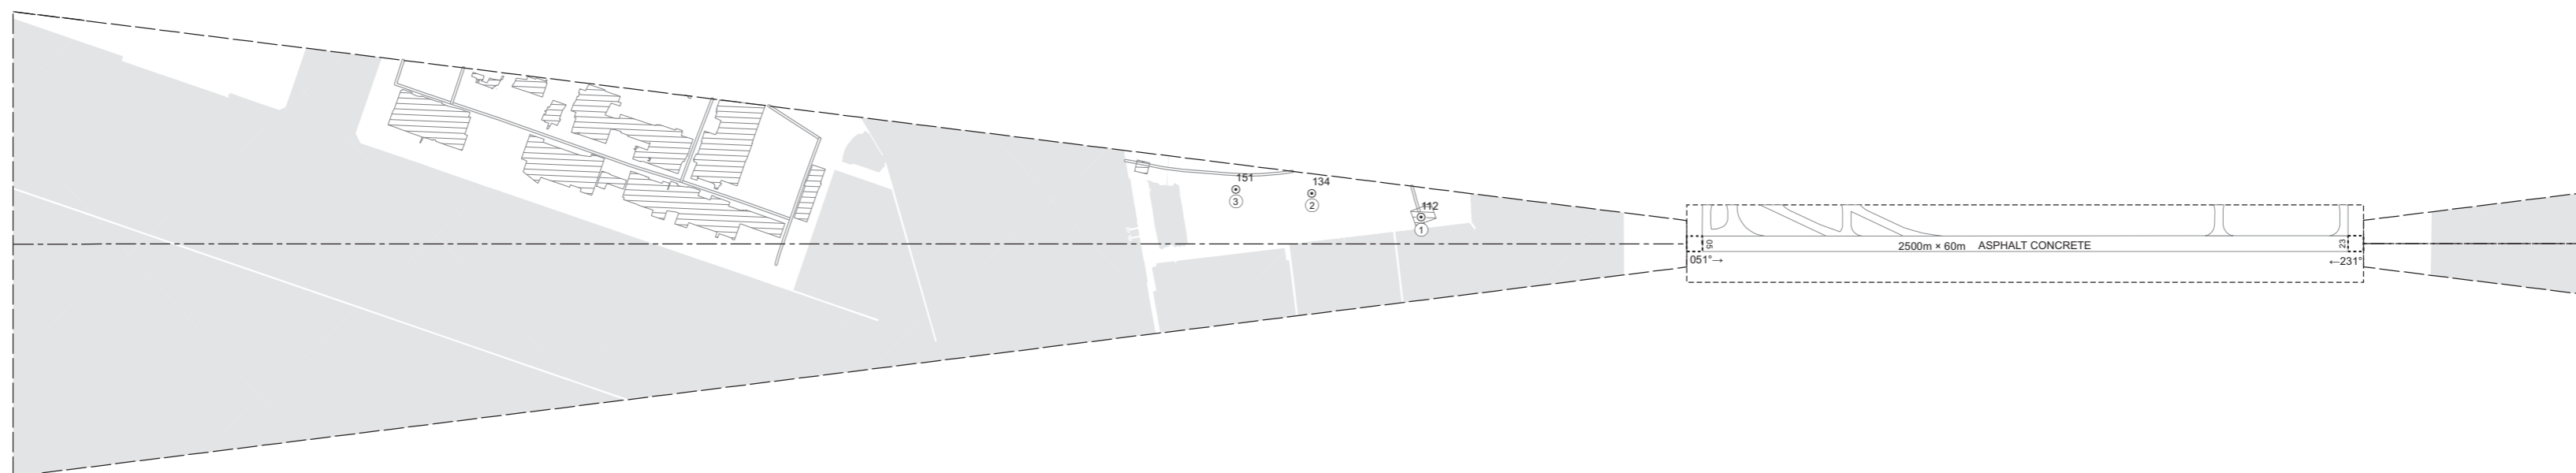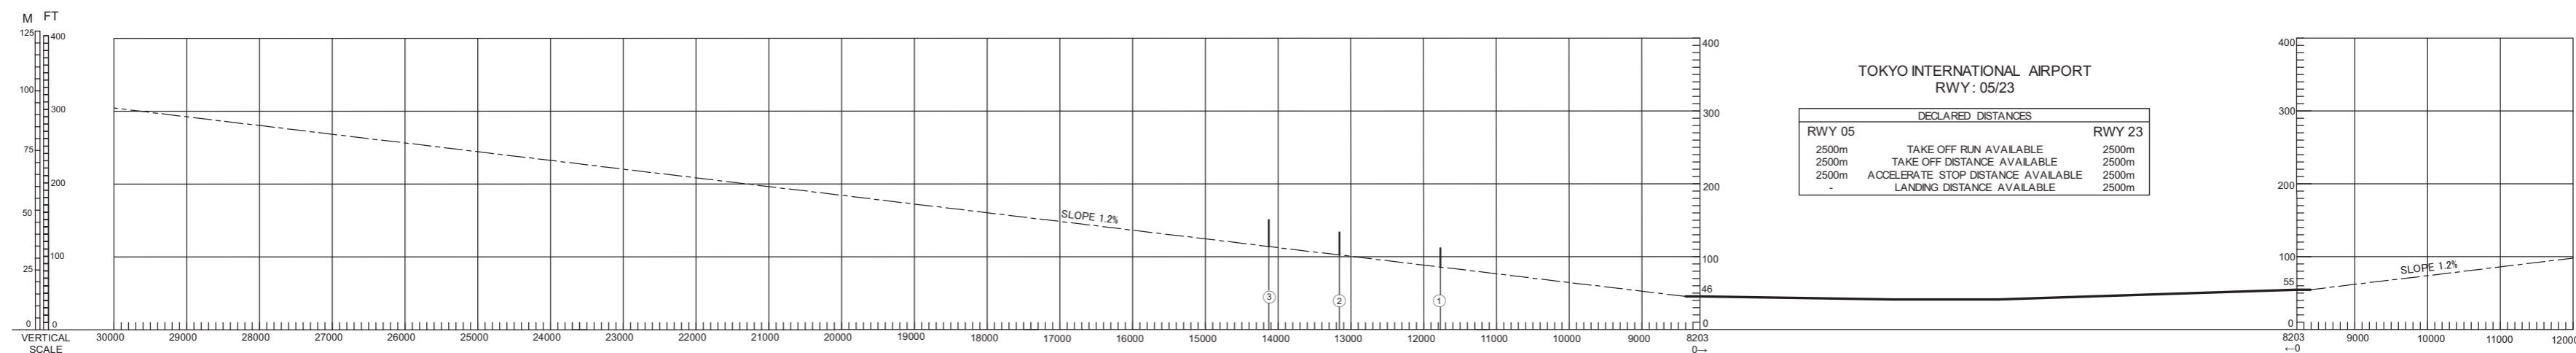

LEGEND		AMENDMENT RECORD		
		Nr	DATE	ENTERED BY
①	IDENTIFICATION NUMBER			
⊙	POLE, TOWER, SPIRE, ANTENNA, ETC			
*	TREE			
▬	RAILROAD			
▬	TRANSMISSION LINE OR OVERHEAD CABLE			
△	TRIANGULATION POINT			
★	AERONAUTICAL GROUND LIGHT			
■	BUILDING OR LARGE STRUCTURE			
⋯	CONTOURS(ft)			
▬	LEVEE			
▬	RIVER			

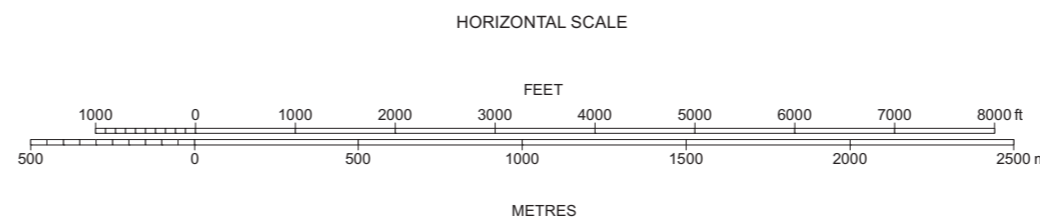

CHANGE : Update.

測量法に基づく国土地理院長承認(使用) 3.4号 352. 国土数値情報(緊急輸送道路)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC  
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO  
TYPE B





CHANGE : Obstruction added.

### PRECISION APPROACH TERRAIN CHART

DISTANCES AND HEIGHTS IN METRES

RWY34R

Displaced THR

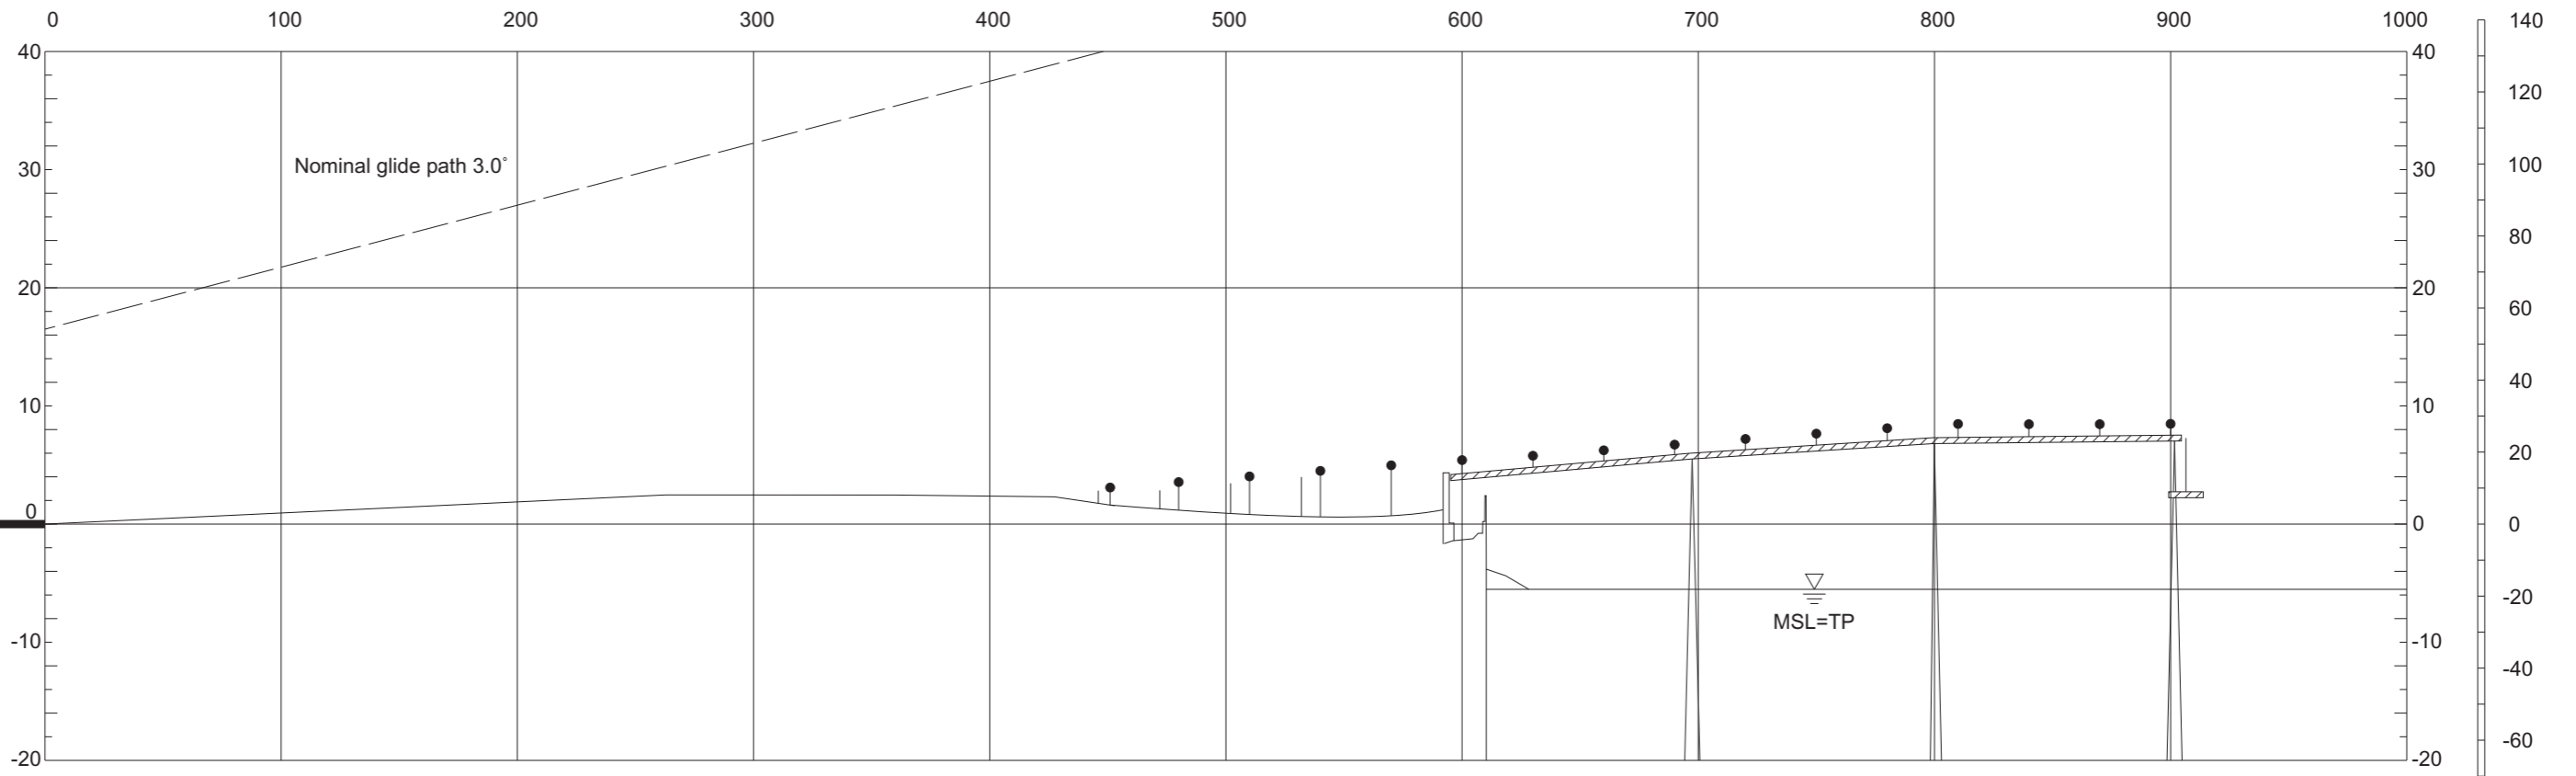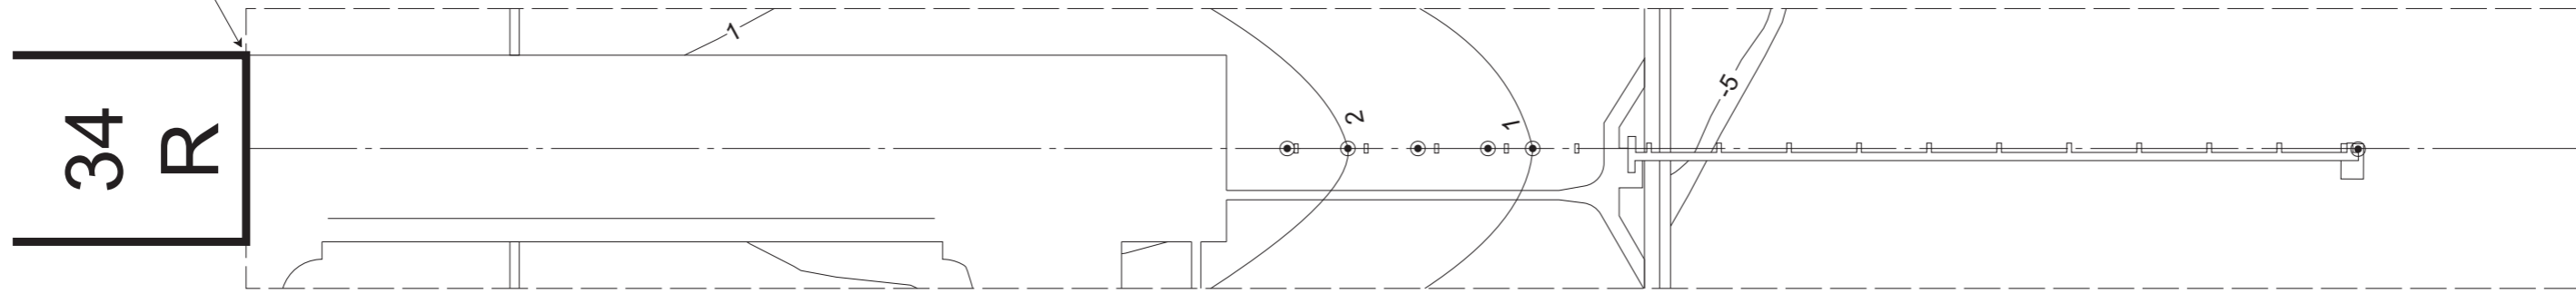

HORIZONTAL SCALE 1:2500

VERTICAL SCALE 1:500

CONTOUR AND HEIGHTS ARE RELATED  
TO ELEVATION OF DISPLACED THR OF RWY34R

LEGEND	
CONTOUR	-1
CENTER-LINE PROFILE	
DEVIATION AT LEAST ±3m FROM CENTER-LINE PROFILE	
APPROACH LIGHTING	
ANTENNA	

Vertical scale  
in feet

CHANGE: CONTOUR

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

SID

SEKIYADO THREE DEPARTURE

RWY04/34R/34L: Climb RWY HDG to 700FT, turn right HDG100° to HME 9.0DME, turn left HDG017° to intercept and proceed via SYE R167 to SYE VOR/DME.

Cross SYE VOR/DME between 12000FT and FL150.

RWY16R/16L: Climb RWY HDG to intercept and proceed via HME 11.8DME counterclockwise ARC to HME R065, turn right HDG017° to intercept and proceed via SYE R167 to SYE VOR/DME.


Cross HME R116 at or above 6000FT, cross SYE VOR/DME between 12000FT and FL150.

RWY05 : Climb on HDG059° to HME 10.0DME, turn left HDG017° to intercept and proceed via SYE R167 to SYE VOR/DME.

Cross SYE VOR/DME between 12000FT and FL150.

Note RWY34R/34L/04: 5.0% climb gradient required up to 700FT.

RWY05: 5.0% climb gradient required up to 500FT.

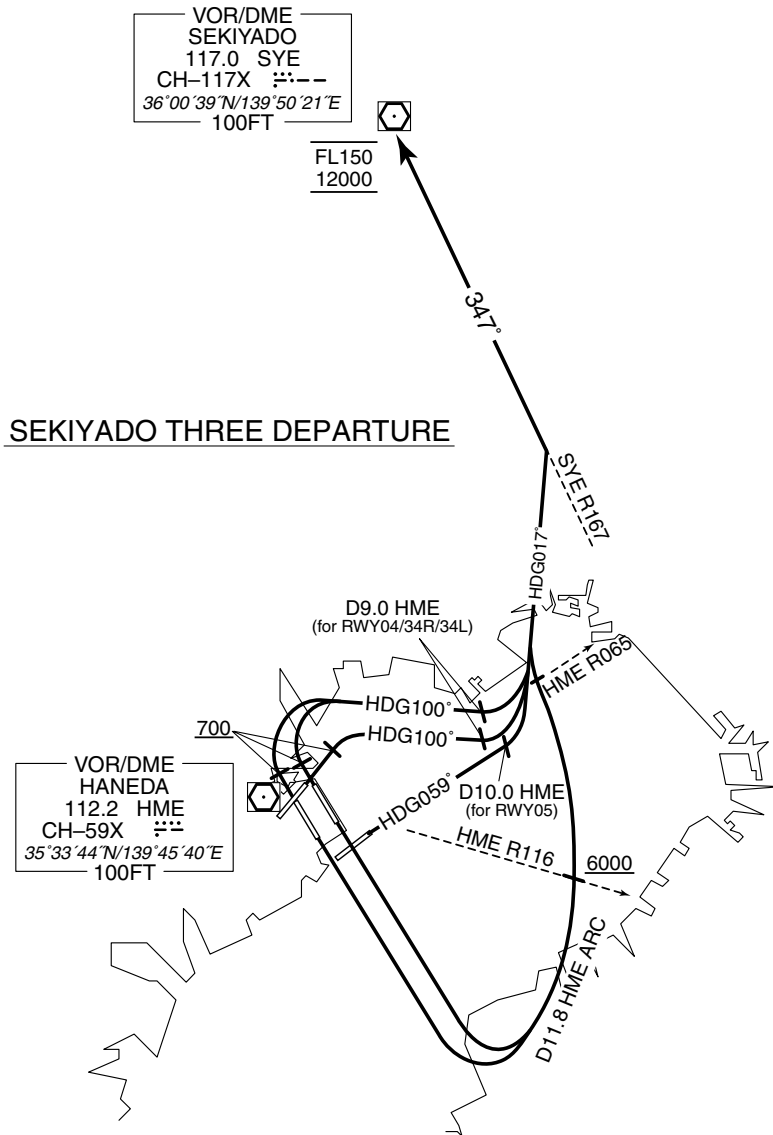

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

SID


VADAR ONE DEPARTURE

RWY04/34R/34L: Climb RWY HDG to 700FT, turn right HDG100° to HME 9.0DME, turn right HDG222° to intercept and proceed via HME R177 to VADAR.  
Cross HME R120 at or above 5000FT, cross VADAR at or above 9000FT.

RWY16R/16L: Climb RWY HDG to HME 7.0DME, turn right HDG207° to intercept and proceed via HME R177 to VADAR.  
Cross VADAR at or above 9000FT.

RWY05: Climb RWY HDG to 1000FT, turn right HDG100° to HME 9.0DME, turn right HDG222° to intercept and proceed via HME R177 to VADAR.  
Cross HME R120 at or above 5000FT, cross VADAR at or above 9000FT.

Note RWY04/34R/34L: 5.0% climb gradient required up to 700FT.  
RWY05: 5.0% climb gradient required up to 1000FT.

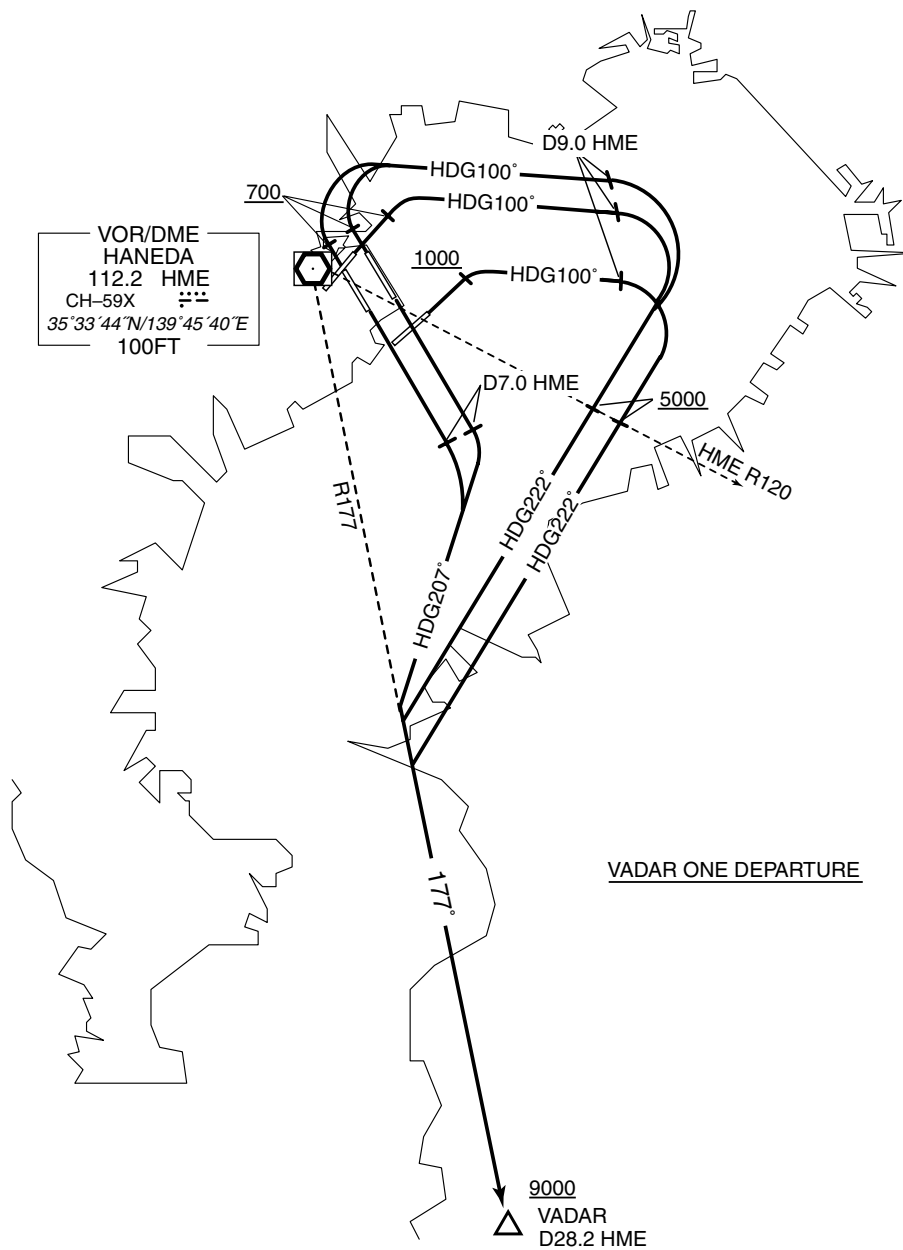

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

SID

OPPAR THREE DEPARTURE

RWY04/34R/34L: Climb RWY HDG to 700FT, turn right within 4NM, climb via HDG110° to HME 7.0DME, turn right, via HME 8.0DME clockwise ARC to intercept and proceed via HME R194 to OPPAR.

Cross HME 7.0DME at or above 3000FT, cross HME R120 at or above 5000FT, cross OPPAR at or above 9000FT.

RWY16R/16L: Climb RWY HDG to 500FT, turn left climb via HME R140 to 8.0DME, turn left HDG239° within HME 12.0DME to intercept and proceed via HME R194 to OPPAR.


Cross OPPAR at or above 9000FT.

RWY05: Climb RWY HDG to HME 5.0DME, turn right, via HME 8.0DME clockwise ARC to intercept and proceed via HME R194 to OPPAR.

Cross HME R120 at or above 5000FT, cross OPPAR at or above 9000FT.

Note Aircraft taking off from RWY16R/16L are required to complete left turns south of HME R080.

RWY34R/34L/04: 5.0% climb gradient required up to 700FT.

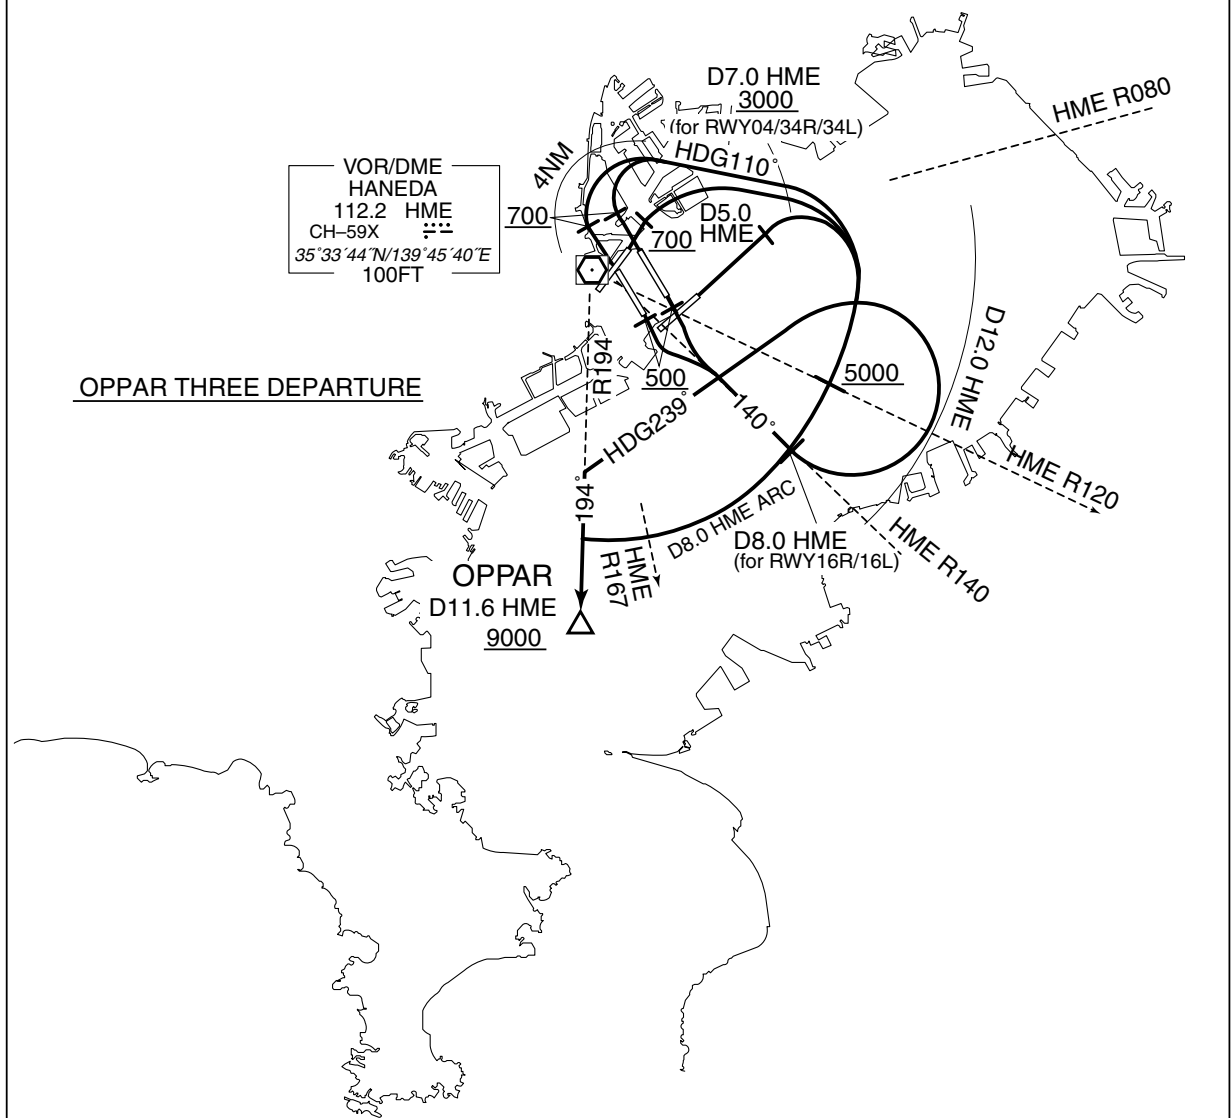

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV TRANSITION

JYOGA TRANSITION UTIBO TRANSITION		RNAV1
Note 1 ) DME/DME/IRU or GNSS required.  2 ) RADAR service required.	Critical DME	-
	DME GAP	-
	Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 7° W(2016)

JYOGA TRANSITION

DME  
YOKOSUKA  
1196 HYD  
CH-109X ≡≡≡-  
35°15'20"N/139°35'15"E  
500FT

JYOGA  
350845.7N  
1393134.9E

FL150

OPPAR  
352215.7N  
1394404.4E

9000

16.9  
22.4°

UTIBO TRANSITION

26.7  
170°

UTIBO  
345647.0N  
1395343.9E

FL150

JYOGA TRANSITION

From OPPAR at or above 9000FT, to JYOGA at or above FL150.

UTIBO TRANSITION

From OPPAR at or above 9000FT, to UTIBO at or above FL150.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV TRANSITION

JYOGA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OPPAR	—	—	-7.4	—	—	+9000	—	—	RNAV1
002	TF	JYOGA	—	224 (217.1)	-7.4	16.9	—	+FL150	—	—	RNAV1

UTIBO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OPPAR	—	—	-7.4	—	—	+9000	—	—	RNAV1
002	TF	UTIBO	—	170 (162.7)	-7.4	26.7	—	+FL150	—	—	RNAV1

**INTENTIONALLY LEFT BLANK**

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

SID

ISOGO TWO DEPARTURE (FOR PROP ONLY)

RWY04/34R/34L: Climb RWY HDG to 700FT or above, turn left within 4NM, climb via HME R177 to VADAR.


RWY16R/16L: Climb RWY HDG to HME 7.0DME, turn right HDG207° to intercept and proceed via HME R177 to VADAR.

RWY05: Climb RWY HDG to 1000FT, turn right HDG100° to HME 9.0DME, turn right HDG222° to intercept and proceed via HME R177 to VADAR.

Cross HME R120 at or above 5000FT.

Note RWY34R/34L/04: 5.0% climb gradient required up to 700FT.

RWY05: 5.0% climb gradient required up to 1000FT.

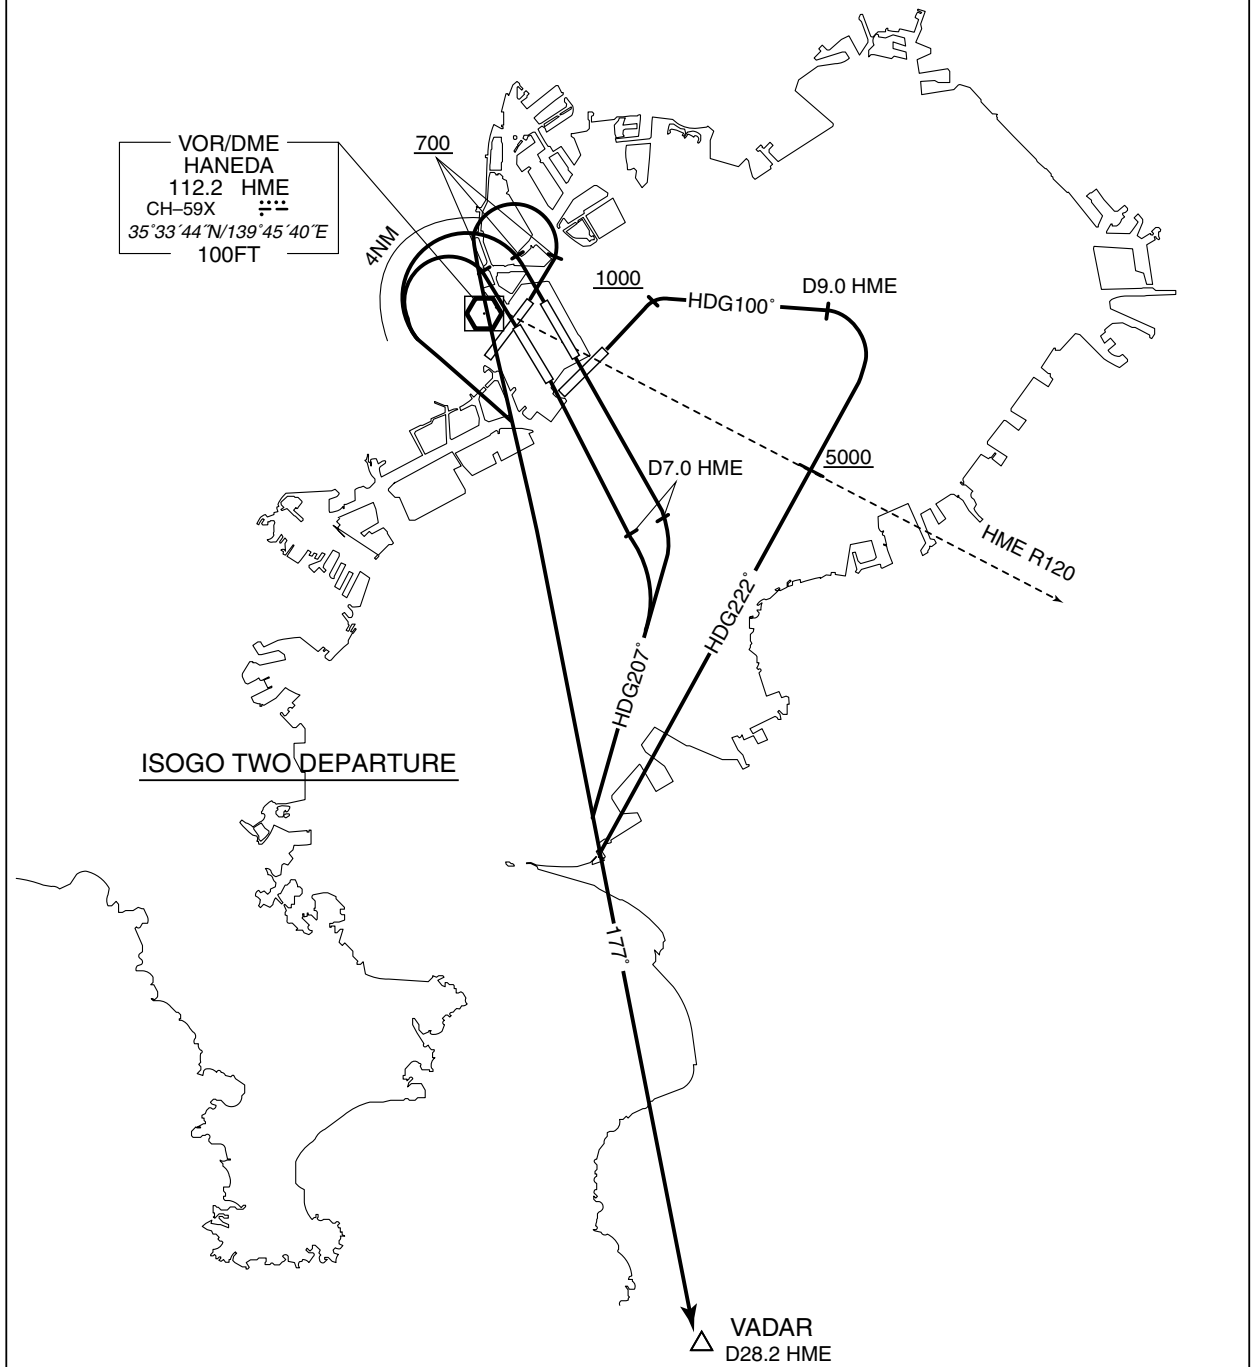



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL


TRANSITION

OSHIMA TRANSITION

From over VADAR, via HME R177 to intercept and proceed via XAC R058 to XAC VORTAC.

CHIKURA TRANSITION

From over VADAR, via HME R177 to UTIBO.

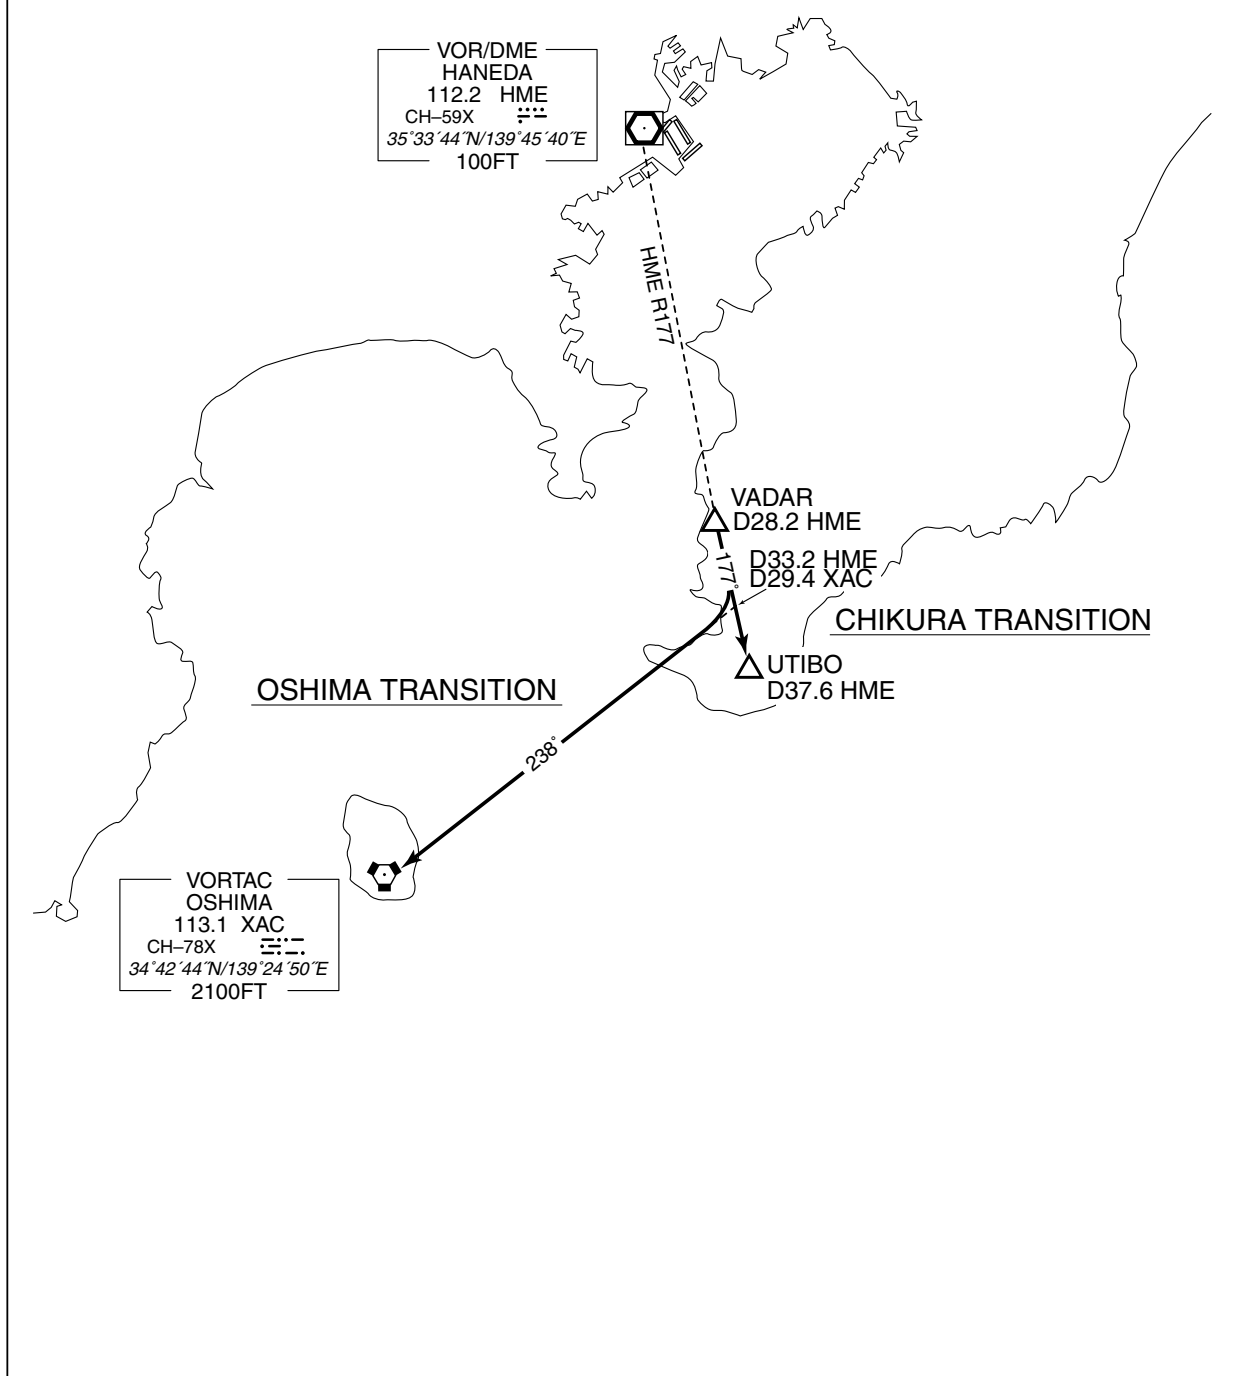

STANDARD DEPARTURE CHART-INSTRUMENT


RJTT/TOKYO INTL

RNAV SID

VAMOS THREE DEPARTURE		RNAV1
<p>Note 1) DME/DME/IRU or GNSS required.                      ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling.                      2) RADAR service required.</p>		<p>RWY16R:HME 1.2NM FM DER - 1.9NM to T6R11                      RWY16L:HME 1.0NM FM DER - 2.4NM to T6L21                      RWY34R:HME 1.0NM FM DER - 2.5NM to TT502                      RWY34L:HME 0.5NM FM DER - 2.5NM to TT502                      RWY04:HME 1.7NM FM DER - 2.5NM to TT502                      RWY05:HME DER - 2.7NM to TT502</p>
DME GAP	<p>RWY16R:DER - 1.2NM FM DER                      RWY16L:DER - 1.0NM FM DER                      RWY34R:DER - 1.0NM FM DER                      RWY34L:DER - 0.5NM FM DER                      RWY04:DER - 1.7NM FM DER                      RWY22:DER - 1.4NM FM DER</p>	
Inappropriate Nav aids	<p>See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1</p>	

VAR8°W(2020)

CHANGE : PROC renamed. VAR. HDG after DEP FM RWY04,22. Course FM TT502 to LOCUP.

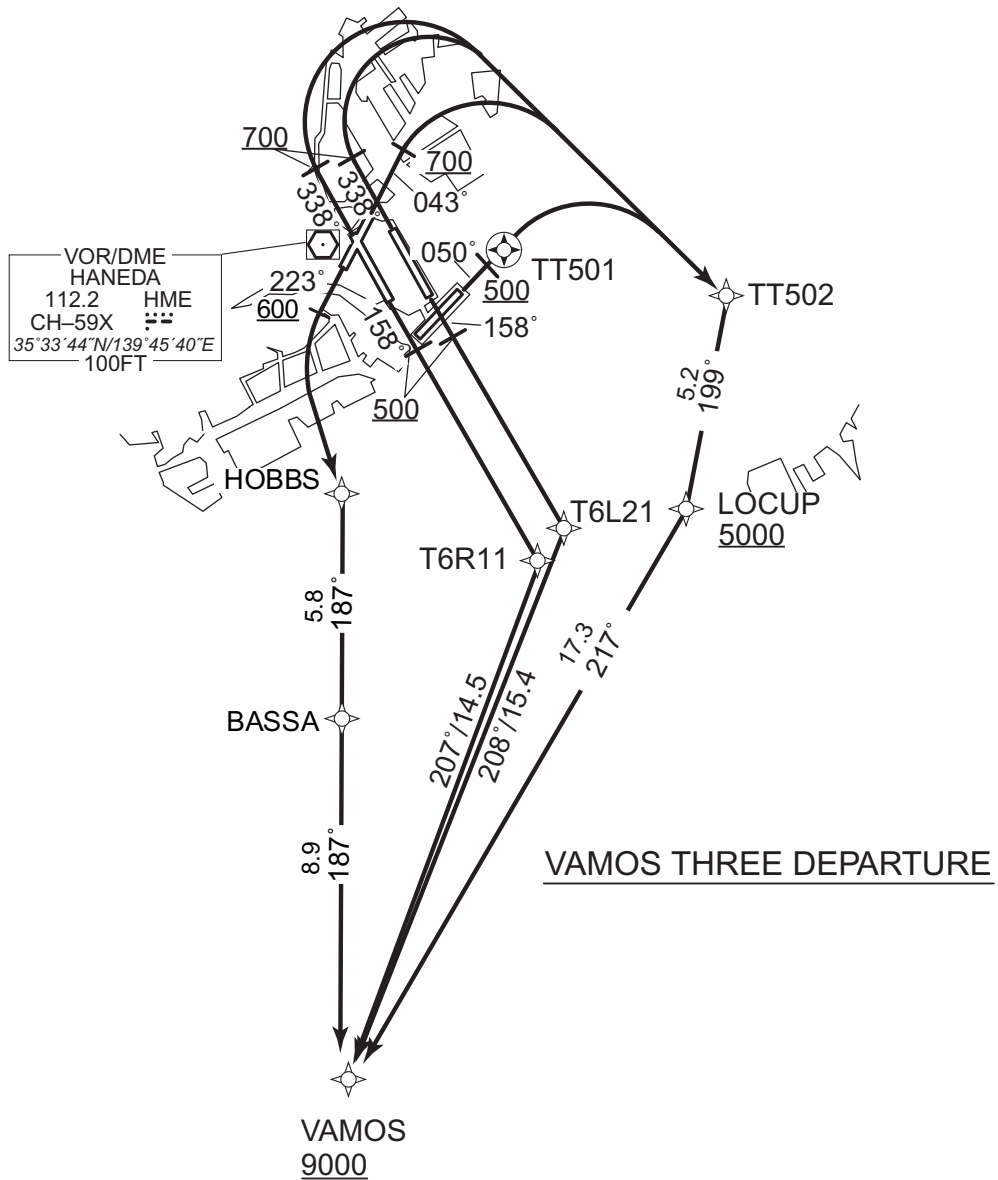

## STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAMOS THREE DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,  
to VAMOS at or above 9000FT.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L21,  
to VAMOS at or above 9000FT.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to  
TT502, to LOCUP at or above 5000FT, to VAMOS at or above  
9000FT.

RWY04: Climb on HDG 043° at or above 700FT, turn right direct to TT502,  
to LOCUP at or above 5000FT, to VAMOS at or above 9000FT.

RWY05: Climb on HDG 050° at or above 500FT, direct to TT501, turn right  
direct to TT502, to LOCUP at or above 5000FT, to VAMOS at or  
above 9000FT.

RWY22: Climb on HDG 223° at or above 600FT, turn left direct to HOBBS,  
to BASSA, to VAMOS at or above 9000FT.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

RWY22 : 5.0% climb gradient required up to 600FT.

CHANGE : PROC renamed. HDG after DEP FM RWY04,22.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAMOS THREE DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6R11	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	VAMOS	-	207 (199.5)	-7.6	14.5	-	+9000	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6L21	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	VAMOS	-	208 (200.7)	-7.6	15.4	-	+9000	-	-	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
004	TF	VAMOS	-	217 (209.5)	-7.6	17.3	-	+9000	-	-	RNAV1

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	043 (034.9)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
004	TF	VAMOS	-	217 (209.5)	-7.6	17.3	-	+9000	-	-	RNAV1

CHANGE : PROC renamed. Magnetic Variation. RWY34L/RWY34R:NR003(Course). RWY04:NR001,003(Course).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.6	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
005	TF	VAMOS	-	217 (209.5)	-7.6	17.3	-	+9000	-	-	RNAV1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	223 (214.9)	-7.6	-	-	+600	-	-	RNAV1
002	DF	HOBBS	-	-	-7.6	-	L	-	-	-	RNAV1
003	TF	BASSA	-	187 (179.9)	-7.6	5.8	-	-	-	-	RNAV1
004	TF	VAMOS	-	187 (179.9)	-7.6	8.9	-	+9000	-	-	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	T6R11	352552.5N / 1395137.2E
HOBBS	352653.9N / 1394541.3E	TT501	353328.7N / 1395029.9E
LOCUP	352718.8N / 1395608.5E	TT502	353224.4N / 1395720.7E
T6L21	352639.1N / 1395222.0E	VAMOS	351215.5N / 1394543.6E

CHANGE : Magnetic Variation. RWY05:NR004(Course). RWY22:NR001(Course).



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL		RNAV TRANSITION	
TATEYAMA TRANSITION / DRAKY TRANSITION		RNAV1	
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.		Critical DME	-
DME GAP	-		
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDS for RNAV1		

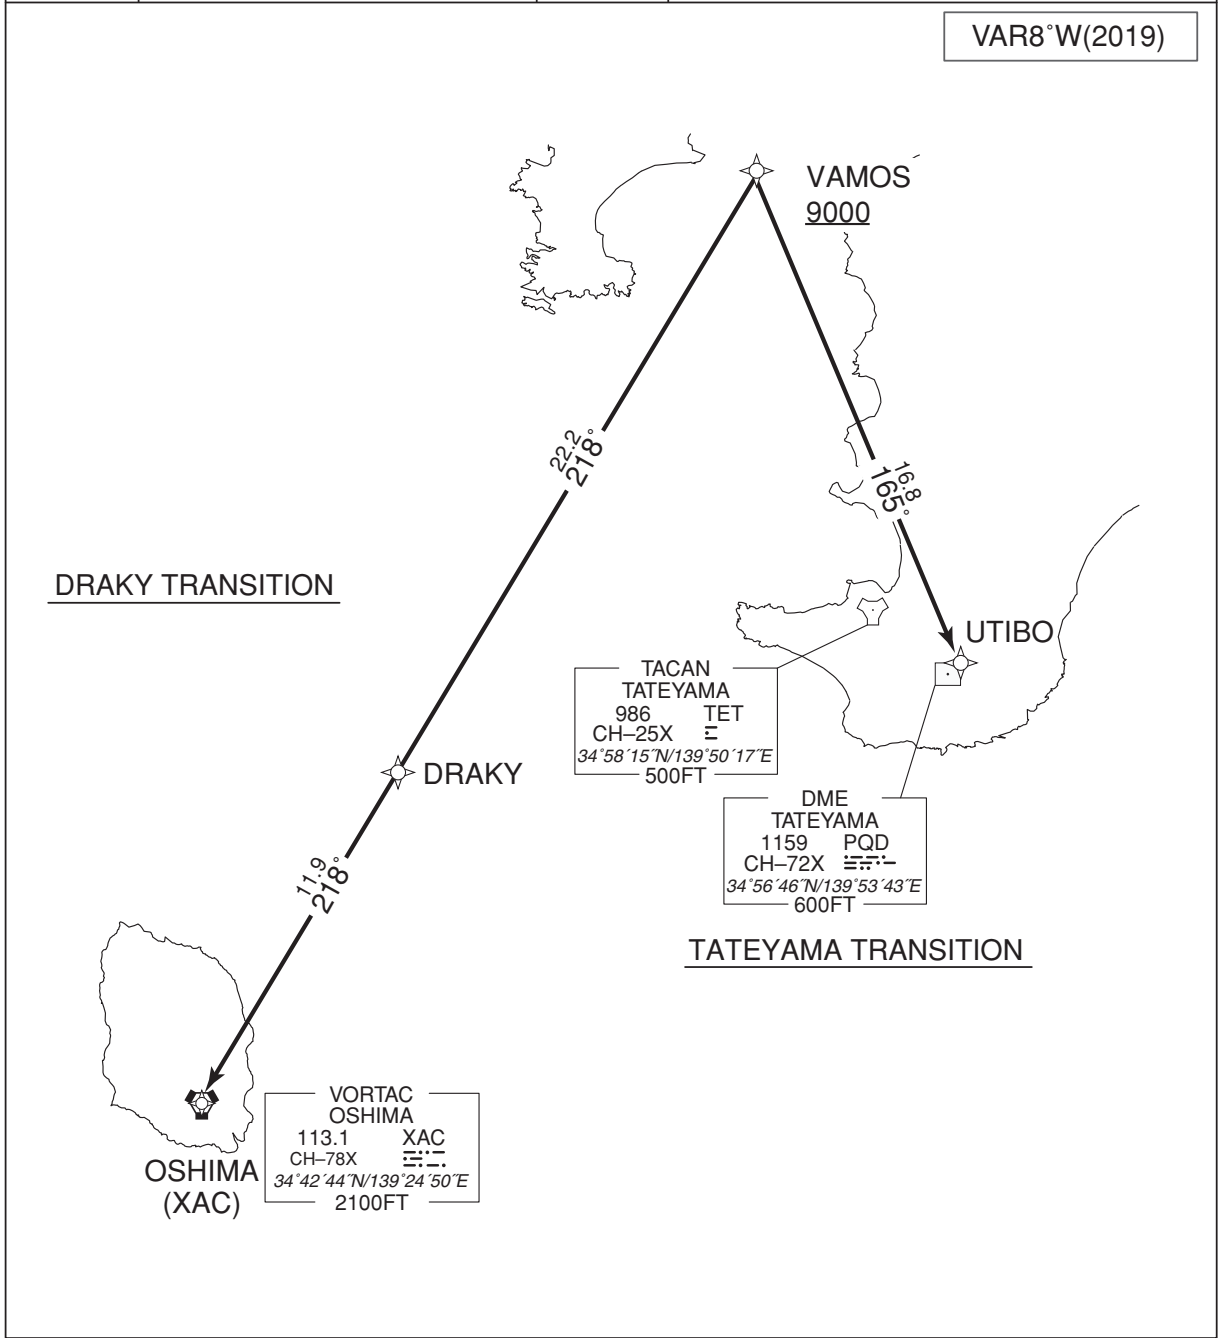

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV TRANSITION

TATEYAMA TRANSITION

From VAMOS at or above 9000FT, to UTIBO.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	VAMOS	—	—	-7.5	—	—	+9000	—	—	RNAV1
002	TF	UTIBO	—	165 (157.0)	-7.5	16.8	—	—	—	—	RNAV1

DRAKY TRANSITION

From VAMOS at or above 9000FT, to DRAKY, to XAC.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	VAMOS	—	—	-7.5	—	—	+9000	—	—	RNAV1
002	TF	DRAKY	—	218 (210.2)	-7.5	22.2	—	—	—	—	RNAV1
003	TF	XAC	—	218 (210.1)	-7.5	11.9	—	—	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
DRAKY	345301.7N / 1393205.5E	VAMOS	351215.5N / 1394543.6E
UTIBO	345647.0N / 1395343.9E	XAC	344244.1N / 1392450.5E


CHANGE : New PROC

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL RNAV SID

LAXAS THREE DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		RWY16R: HME 1.2NM FM DER - 1.9NM to T6R11 HYD T6R11 - TAURA RWY16L: HME 1.0NM FM DER - 2.4NM to T6L21 HYD 9.0NM to TAURA - TAURA RWY34R: HME 1.0NM FM DER - 2.5NM to TT502 HYD 8.6NM to TAURA - TAURA RWY34L: HME 0.5NM FM DER - 2.5NM to TT502 HYD 8.6NM to TAURA - TAURA RWY04: HME 1.7NM FM DER - 2.5NM to TT502 HYD 8.6NM to TAURA - TAURA RWY05: HME DER - 2.7NM to TT502 HYD 8.6NM to TAURA - TAURA
DME GAP	RWY16R:DER - 1.2NM FM DER RWY16L:DER - 1.0NM FM DER RWY34R:DER - 1.0NM FM DER RWY34L:DER - 0.5NM FM DER RWY04:DER - 1.7NM FM DER RWY22:DER - 1.4NM FM DER	
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1	

CHANGE : PROC renamed. VAR. HDG after DEP FM RWY04,22. Course FM TT502 to LOCUP. Course FM BASSA to UMUKI.

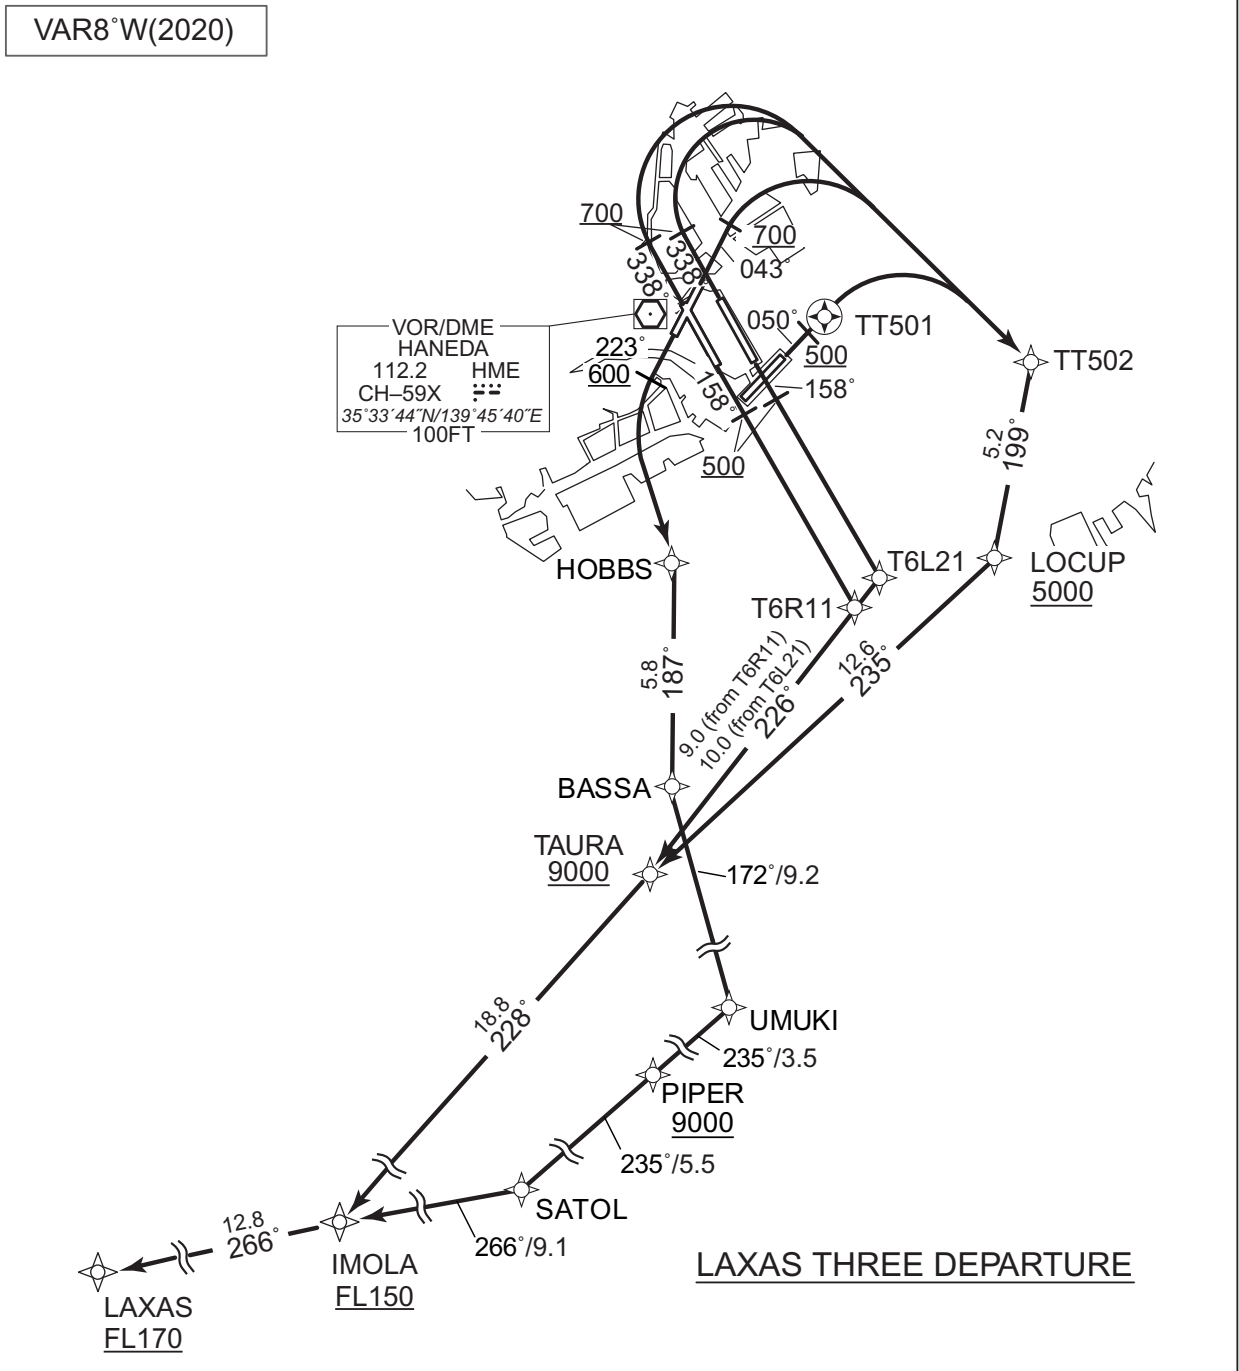

## STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

LAXAS THREE DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,  
to TAURA at or above 9000FT, to IMOLA at or above FL150,  
to LAXAS at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L21,  
to TAURA at or above 9000FT, to IMOLA at or above FL150,  
to LAXAS at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to  
TT502, to LOCUP at or above 5000FT, to TAURA at or above  
9000FT, to IMOLA at or above FL150, to LAXAS at or above  
FL170.

RWY04 : Climb on HDG 043° at or above 700FT, turn right direct to TT502,  
to LOCUP at or above 5000FT, to TAURA at or above 9000FT,  
to IMOLA at or above FL150, to LAXAS at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right  
direct to TT502, to LOCUP at or above 5000FT, to TAURA at or  
above 9000FT, to IMOLA at or above FL150, to LAXAS at or above  
FL170.

RWY22 : Climb on HDG 223° at or above 600FT, turn left direct to HOBBS,  
to BASSA, to UMUKI, to PIPER at or above 9000FT, to SATOL,  
to IMOLA at or above FL150, to LAXAS at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.  
RWY05 : 5.0% climb gradient required up to 500FT.  
RWY22 : 5.0% climb gradient required up to 600FT.

CHANGE : PROC renamed. HDG after DEP FM RWY04,22.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

LAXAS THREE DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6R11	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	TAURA	-	226 (218.1)	-7.6	9.0	-	+9000	-	-	RNAV1
004	TF	IMOLA	-	228 (220.5)	-7.6	18.8	-	+FL150	-	-	RNAV1
005	TF	LAXAS	-	266 (258.6)	-7.6	12.8	-	+FL170	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6L21	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	TAURA	-	226 (218.1)	-7.6	10.0	-	+9000	-	-	RNAV1
004	TF	IMOLA	-	228 (220.5)	-7.6	18.8	-	+FL150	-	-	RNAV1
005	TF	LAXAS	-	266 (258.6)	-7.6	12.8	-	+FL170	-	-	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
004	TF	TAURA	-	235 (227.3)	-7.6	12.6	-	+9000	-	-	RNAV1
005	TF	IMOLA	-	228 (220.5)	-7.6	18.8	-	+FL150	-	-	RNAV1
006	TF	LAXAS	-	266 (258.6)	-7.6	12.8	-	+FL170	-	-	RNAV1

CHANGE : PROC renamed. Magnetic Variation. RWY34L/RWY34R:NR003(Course).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	043 (034.9)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
004	TF	TAURA	-	235 (227.3)	-7.6	12.6	-	+9000	-	-	RNAV1
005	TF	IMOLA	-	228 (220.5)	-7.6	18.8	-	+FL150	-	-	RNAV1
006	TF	LAXAS	-	266 (258.6)	-7.6	12.8	-	+FL170	-	-	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.6	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
005	TF	TAURA	-	235 (227.3)	-7.6	12.6	-	+9000	-	-	RNAV1
006	TF	IMOLA	-	228 (220.5)	-7.6	18.8	-	+FL150	-	-	RNAV1
007	TF	LAXAS	-	266 (258.6)	-7.6	12.8	-	+FL170	-	-	RNAV1

CHANGE : Magnetic Variation. RWY04:NR001,003(Course). RWY05:NR004(Course).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	223 (214.9)	-7.6	-	-	+600	-	-	RNAV1
002	DF	HOBBS	-	-	-7.6	-	L	-	-	-	RNAV1
003	TF	BASSA	-	187 (179.9)	-7.6	5.8	-	-	-	-	RNAV1
004	TF	UMUKI	-	172 (163.9)	-7.6	9.2	-	-	-	-	RNAV1
005	TF	PIPER	-	235 (227.4)	-7.6	3.5	-	+9000	-	-	RNAV1
006	TF	SATOL	-	235 (227.4)	-7.6	5.5	-	-	-	-	RNAV1
007	TF	IMOLA	-	266 (258.7)	-7.6	9.1	-	+FL150	-	-	RNAV1
008	TF	LAXAS	-	266 (258.6)	-7.6	12.8	-	+FL170	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	T6L21	352639.1N / 1395222.0E
HOBBS	352653.9N / 1394541.3E	T6R11	352552.5N / 1395137.2E
IMOLA	350426.0N / 1392951.0E	TAURA	351846.1N / 1394447.3E
LAXAS	350153.1N / 1391432.8E	TT501	353328.7N / 1395029.9E
LOCUP	352718.8N / 1395608.5E	TT502	353224.4N / 1395720.7E
PIPER	350958.3N / 1394542.0E	UMUKI	351219.1N / 1394849.2E
SATOL	350613.3N / 1394043.4E		

CHANGE : Magnetic Variation. RWY22:NR001,004(Course).


STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

NINOX THREE DEPARTURE		RNAV1
<p>Note 1) DME/DME/IRU or GNSS required.                      ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling.                      2) RADAR service required.</p>		<p>RWY16R : HME 1.2NM FM DER - 3.8NM to T6R12                      HYD T6R12 - TT631                      PQD 1.0NM to BAYGE - 6.5NM to SEIKO                      RWY16L : HME 1.0NM FM DER - 4.7NM to T6L22                      HYD 5.6NM to TT631 - TT631                      PQD 1.0NM to BAYGE - 6.5NM to SEIKO                      RWY34R : HME 1.0NM FM DER - 2.5NM to TT502                      HYD 6.5NM to BAYGE - BAYGE                      PQD BAYGE - 6.5NM to SEIKO                      RWY34L : HME 0.5NM FM DER - 2.5NM to TT502                      HYD 6.5NM to BAYGE - BAYGE                      PQD BAYGE - 6.5NM to SEIKO                      RWY04 : HME 1.7NM FM DER - 2.5NM to TT502                      HYD 6.5NM to BAYGE - BAYGE                      PQD BAYGE - 6.5NM to SEIKO                      RWY05 : HME DER - 2.7NM to TT502                      HYD 6.5NM to BAYGE - BAYGE                      PQD BAYGE - 6.5NM to SEIKO</p>
DME GAP	<p>Critical DME</p> <p>RWY16R : DER - 1.2NM FM DER                      RWY16L : DER - 1.0NM FM DER                      RWY34R : DER - 1.0NM FM DER                      RWY34L : DER - 0.5NM FM DER                      RWY04 : DER - 1.7NM FM DER                      RWY22 : DER - 1.4NM FM DER</p>	
Inappropriate Nav aids	<p>See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1</p>	

CHANGE : PROC renamed. VAR. HDG after DEP FM RWY04,22. Course FM TT502 to LOCUP. Course FM TT631 to BAYGE. Course FM BASSA to UMUKI. Course FM SEIKO to NINOX.

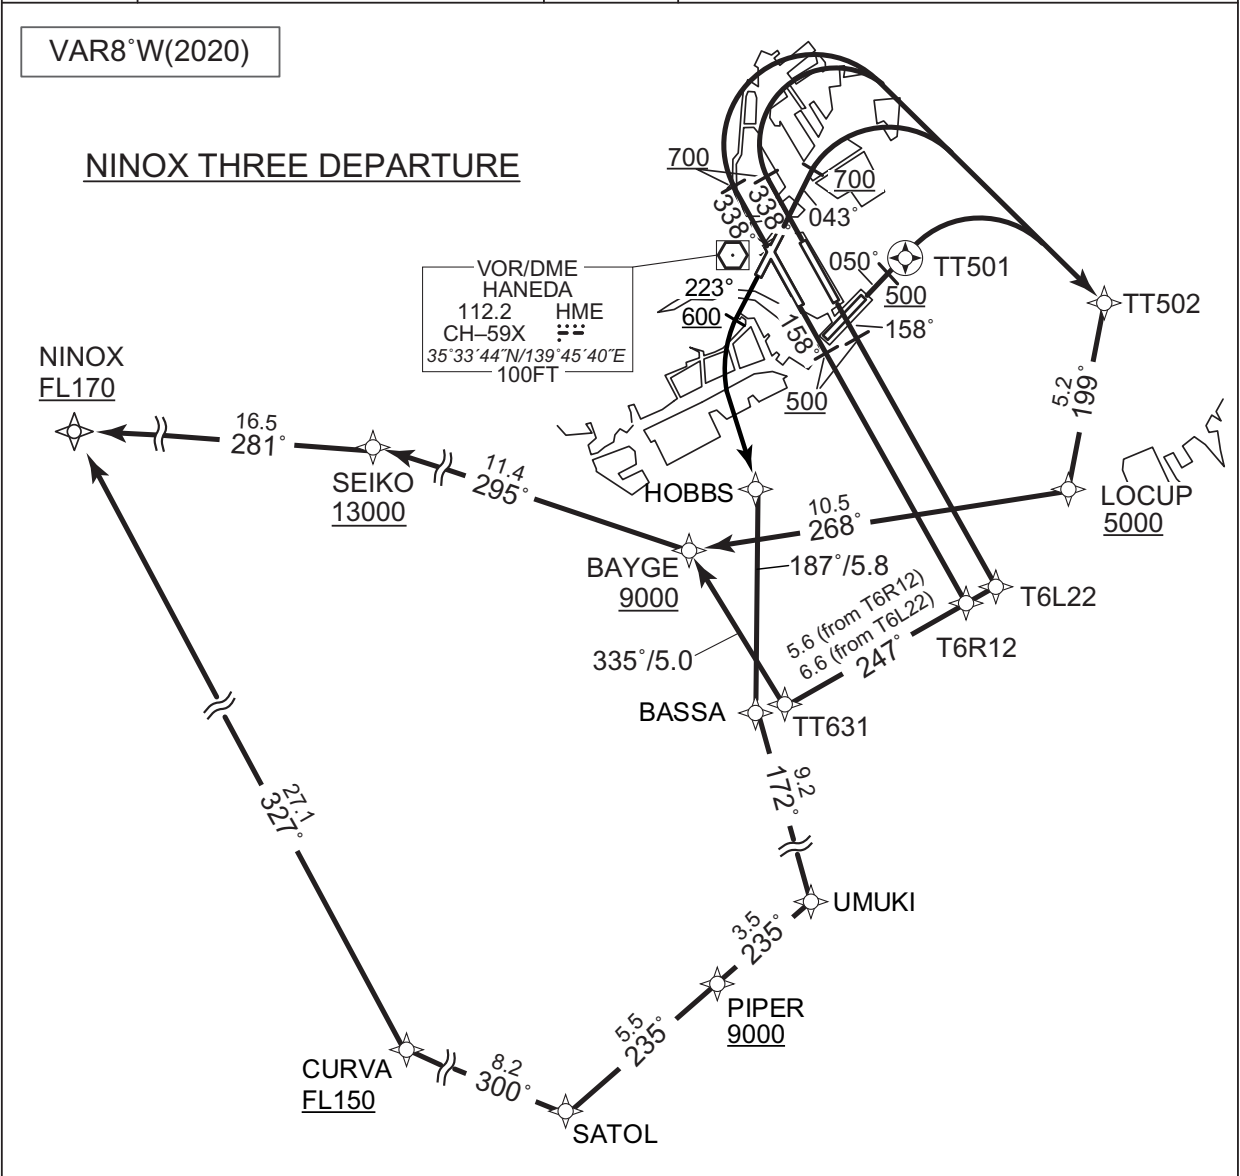



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

NINOX THREE DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R12, to TT631, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L22, to TT631, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY04 : Climb on HDG 043° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY22 : Climb on HDG 223° at or above 600FT, turn left direct to HOBBS, to BASSA, to UMUKI, to PIPER at or above 9000FT, to SATOL, to CURVA at or above FL150, to NINOX at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.  
RWY05 : 5.0% climb gradient required up to 500FT.  
RWY22 : 5.0% climb gradient required up to 600FT.

CHANGE : PROC renamed. HDG after DEP FM RWY04,22.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

NINOX THREE DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6R12	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	TT631	-	247 (239.8)	-7.6	5.6	-	-	-	-	RNAV1
004	TF	BAYGE	-	335 (327.0)	-7.6	5.0	-	+9000	-	-	RNAV1
005	TF	SEIKO	-	295 (287.8)	-7.6	11.4	-	+13000	-	-	RNAV1
006	TF	NINOX	-	281 (272.9)	-7.6	16.5	-	+FL170	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6L22	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	TT631	-	247 (239.8)	-7.6	6.6	-	-	-	-	RNAV1
004	TF	BAYGE	-	335 (327.0)	-7.6	5.0	-	+9000	-	-	RNAV1
005	TF	SEIKO	-	295 (287.8)	-7.6	11.4	-	+13000	-	-	RNAV1
006	TF	NINOX	-	281 (272.9)	-7.6	16.5	-	+FL170	-	-	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
004	TF	BAYGE	-	268 (260.6)	-7.6	10.5	-	+9000	-	-	RNAV1
005	TF	SEIKO	-	295 (287.8)	-7.6	11.4	-	+13000	-	-	RNAV1
006	TF	NINOX	-	281 (272.9)	-7.6	16.5	-	+FL170	-	-	RNAV1

CHANGE : PROC renamed. Magnetic Variation. RWY16R:NR004,006(Course). RWY16L:NR004,006(Course). RWY34L/RWY34R:NR003,006(Course).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	043 (034.9)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
004	TF	BAYGE	-	268 (260.6)	-7.6	10.5	-	+9000	-	-	RNAV1
005	TF	SEIKO	-	295 (287.8)	-7.6	11.4	-	+13000	-	-	RNAV1
006	TF	NINOX	-	281 (272.9)	-7.6	16.5	-	+FL170	-	-	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.6	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
005	TF	BAYGE	-	268 (260.6)	-7.6	10.5	-	+9000	-	-	RNAV1
006	TF	SEIKO	-	295 (287.8)	-7.6	11.4	-	+13000	-	-	RNAV1
007	TF	NINOX	-	281 (272.9)	-7.6	16.5	-	+FL170	-	-	RNAV1

CHANGE : Magnetic Variation. RWY04:NR001,003,006(Course). RWY05:NR004,007(Course).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	223 (214.9)	-7.6	-	-	+600	-	-	RNAV1
002	DF	HOBBS	-	-	-7.6	-	L	-	-	-	RNAV1
003	TF	BASSA	-	187 (179.9)	-7.6	5.8	-	-	-	-	RNAV1
004	TF	UMUKI	-	172 (163.9)	-7.6	9.2	-	-	-	-	RNAV1
005	TF	PIPER	-	235 (227.4)	-7.6	3.5	-	+9000	-	-	RNAV1
006	TF	SATOL	-	235 (227.4)	-7.6	5.5	-	-	-	-	RNAV1
007	TF	CURVA	-	300 (292.2)	-7.6	8.2	-	+FL150	-	-	RNAV1
008	TF	NINOX	-	327 (319.6)	-7.6	27.1	-	+FL170	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	SEIKO	352904.5N / 1393005.0E
BAYGE	352535.4N / 1394327.4E	T6L22	352441.2N / 1395345.4E
CURVA	350919.0N / 1393124.4E	T6R12	352413.6N / 1395247.1E
HOBBS	352653.9N / 1394541.3E	TT501	353328.7N / 1395029.9E
LOCUP	352718.8N / 1395608.5E	TT502	353224.4N / 1395720.7E
NINOX	352953.4N / 1390953.1E	TT631	352123.4N / 1394648.6E
PIPER	350958.3N / 1394542.0E	UMUKI	351219.1N / 1394849.2E
SATOL	350613.3N / 1394043.4E		


CHANGE : Magnetic Variation. RWY22:NR001,004(Course).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL		RNAV SID	
TIARA ONE A DEPARTURE		RNAV1	
<p>Note 1) DME/DME/IRU or GNSS required.                      ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling.                      2) RADAR service required.</p>			
DME GAP	<p>RWY16R : DER - 1.2NM FM DER                      RWY16L : DER - 1.0NM FM DER                      RWY34R : DER - 1.0NM FM DER                      RWY34L : DER - 0.5NM FM DER                      RWY04 : DER - 1.7NM FM DER                      RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT</p>	Critical DME	<p>RWY16R : HME 1.2NM FM DER - HATBA                      HYD 2.8NM to HATBA - 1.6NM to HATBA                      PQD HATBA - 1.6NM to KAMAT                      RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23                      PQD 6.6NM to KAIJI - KAIJI                      NRE 6.9NM to INTEL - 6.9NM to LAYER                      RWY34R : HME 1.0NM FM DER - 1.1NM to PLUTO                      SND TORAM - 3.1NM to PLUTO                      PQD 6.6NM to KAIJI - KAIJI                      NRE 6.9NM to INTEL - 6.9NM to LAYER                      RWY34L : HME 0.5NM FM DER - 1.1NM to PLUTO                      SND TORAM - 3.1NM to PLUTO                      PQD 6.6NM to KAIJI - KAIJI                      NRE 6.9NM to INTEL - 6.9NM to LAYER                      RWY04 : HME 1.7NM FM DER - 1.1NM to PLUTO                      SND 2.2NM to TORAM - 3.1NM to PLUTO                      PQD 6.6NM to KAIJI - KAIJI                      NRE 6.9NM to INTEL - 6.9NM to LAYER                      RWY05 : HME DER - 2.7NM to TT502                      TT503 - 3.8NM to KAMAT                      1.8NM to KAMAT - KAMAT                      HYD 1.2NM to TT503 - TT503                      4.8NM to KAMAT - 3.8NM to KAMAT</p>
Inappropriate NavAids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1		

VAR8°W

TIARA ONE A DEPARTURE RWY16R/16L

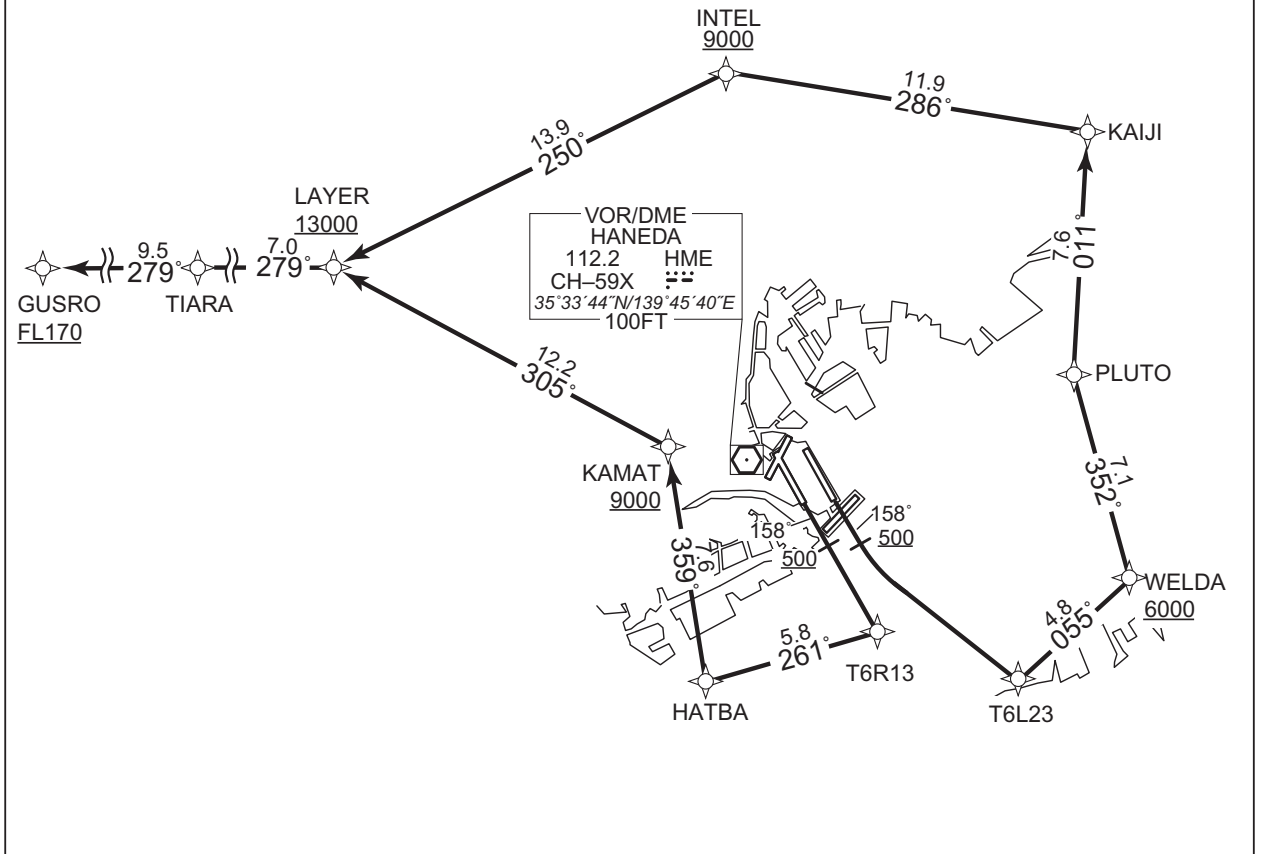


STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAR8°W

TIARA ONE A DEPARTURE RWY 34L/34R/04/05

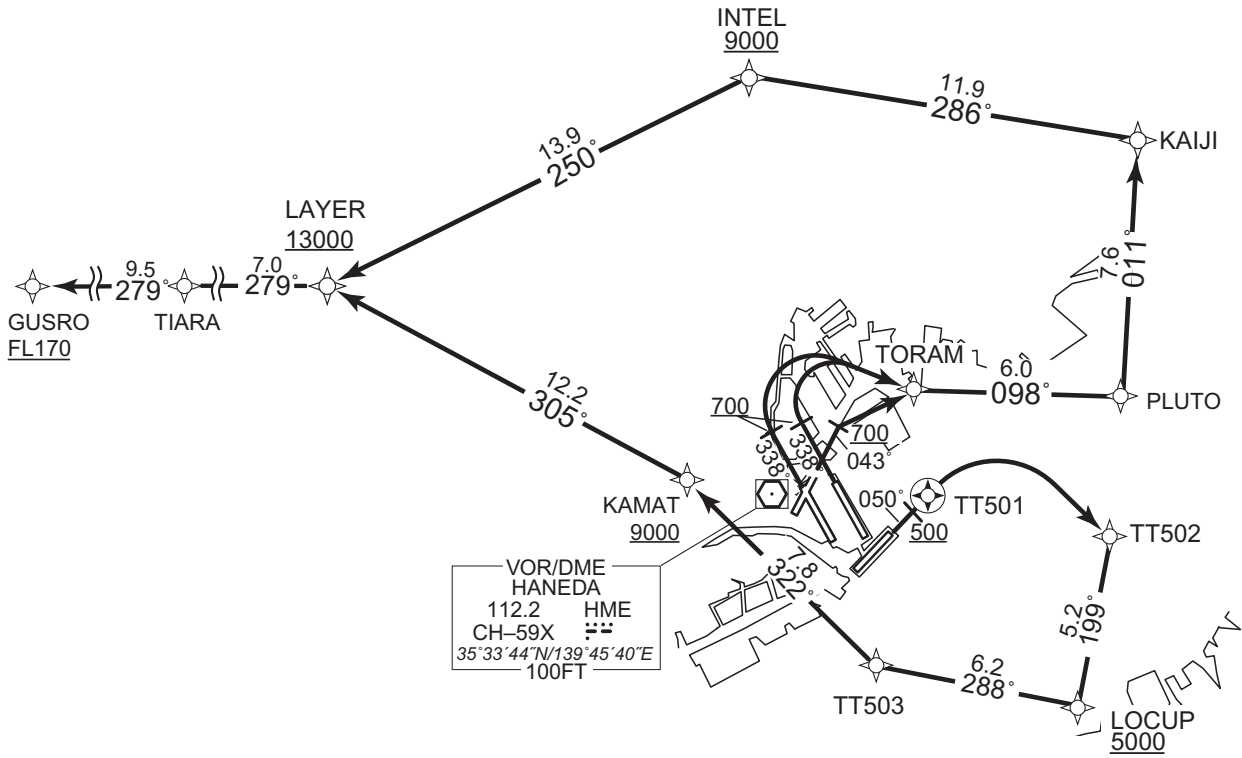

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA ONE A DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13, to HATBA, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to GUSRO at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to GUSRO at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TORAM, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to GUSRO at or above FL170.

RWY04 : Climb on HDG 043° at or above 700FT, direct to TORAM, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to GUSRO at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to GUSRO at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.  
RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA ONE A DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6R13	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	HATBA	-	261 (253.8)	-7.6	5.8	-	-	-	-	RNAV1
004	TF	KAMAT	-	359 (351.1)	-7.6	7.6	-	+9000	-	-	RNAV1
005	TF	LAYER	-	305 (297.1)	-7.6	12.2	-	+13000	-	-	RNAV1
006	TF	TIARA	-	279 (271.2)	-7.6	7.0	-	-	-	-	RNAV1
007	TF	GUSRO	-	279 (271.1)	-7.6	9.5	-	+FL170	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6L23	-	-	-7.6	-	L	-	-	-	RNAV1
003	TF	WELDA	-	055 (047.3)	-7.6	4.8	-	+6000	-	-	RNAV1
004	TF	PLUTO	-	352 (344.5)	-7.6	7.1	-	-	-	-	RNAV1
005	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
006	TF	INTEL	-	286 (278.4)	-7.6	11.9	-	+9000	-	-	RNAV1
007	TF	LAYER	-	250 (242.4)	-7.6	13.9	-	+13000	-	-	RNAV1
008	TF	TIARA	-	279 (271.2)	-7.6	7.0	-	-	-	-	RNAV1
009	TF	GUSRO	-	279 (271.1)	-7.6	9.5	-	+FL170	-	-	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TORAM	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	PLUTO	-	098 (090.7)	-7.6	6.0	-	-	-	-	RNAV1
004	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
005	TF	INTEL	-	286 (278.4)	-7.6	11.9	-	+9000	-	-	RNAV1
006	TF	LAYER	-	250 (242.4)	-7.6	13.9	-	+13000	-	-	RNAV1
007	TF	TIARA	-	279 (271.2)	-7.6	7.0	-	-	-	-	RNAV1
008	TF	GUSRO	-	279 (271.1)	-7.6	9.5	-	+FL170	-	-	RNAV1

CHANGE : New PROC.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	043 (034.9)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TORAM	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	PLUTO	-	098 (090.7)	-7.6	6.0	-	-	-	-	RNAV1
004	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
005	TF	INTEL	-	286 (278.4)	-7.6	11.9	-	+9000	-	-	RNAV1
006	TF	LAYER	-	250 (242.4)	-7.6	13.9	-	+13000	-	-	RNAV1
007	TF	TIARA	-	279 (271.2)	-7.6	7.0	-	-	-	-	RNAV1
008	TF	GUSRO	-	279 (271.1)	-7.6	9.5	-	+FL170	-	-	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.6	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
005	TF	TT503	-	288 (280.8)	-7.6	6.2	-	-	-	-	RNAV1
006	TF	KAMAT	-	322 (314.2)	-7.6	7.8	-	+9000	-	-	RNAV1
007	TF	LAYER	-	305 (297.1)	-7.6	12.2	-	+13000	-	-	RNAV1
008	TF	TIARA	-	279 (271.2)	-7.6	7.0	-	-	-	-	RNAV1
009	TF	GUSRO	-	279 (271.1)	-7.6	9.5	-	+FL170	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
GUSRO	353944.8N / 1390813.1E	T6L23	352627.6N / 1395539.1E
HATBA	352623.4N / 1394315.9E	T6R13	352800.8N / 1395006.4E
INTEL	354553.0N / 1394340.2E	TIARA	353934.0N / 1391954.2E
KAIJI	354409.6N / 1395806.6E	TORAM	353636.8N / 1395011.0E
KAMAT	353353.6N / 1394148.9E	TT501	353328.7N / 1395029.9E
LAYER	353925.4N / 1392829.5E	TT502	353224.4N / 1395720.7E
LOCUP	352718.8N / 1395608.5E	TT503	352828.0N / 1394840.4E
PLUTO	353632.1N / 1395736.8E	WELDA	352941.4N / 1395956.7E

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT


RJTT/TOKYO INTL

RNAV SID

TIARA ONE B DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		RWY16R : HME 1.2NM FM DER - HATBA HYD 2.8NM to HATBA - 1.6NM to HATBA PQD HATBA - 1.6NM to KAMAT RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23 PQD 6.6NM to KAIJI - KAIJI NRE 6.9NM to INTEL - 6.9NM to LAYER RWY05 : HME DER - 2.7NM to TT502 TT503 - 3.8NM to KAMAT 1.8NM to KAMAT - KAMAT HYD 1.2NM to TT503 - TT503 4.8NM to KAMAT - 3.8NM to KAMAT
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 1.0NM FM DER RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT	
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

VAR8°W

TIARA ONE B DEPARTURE RWY16R/16L

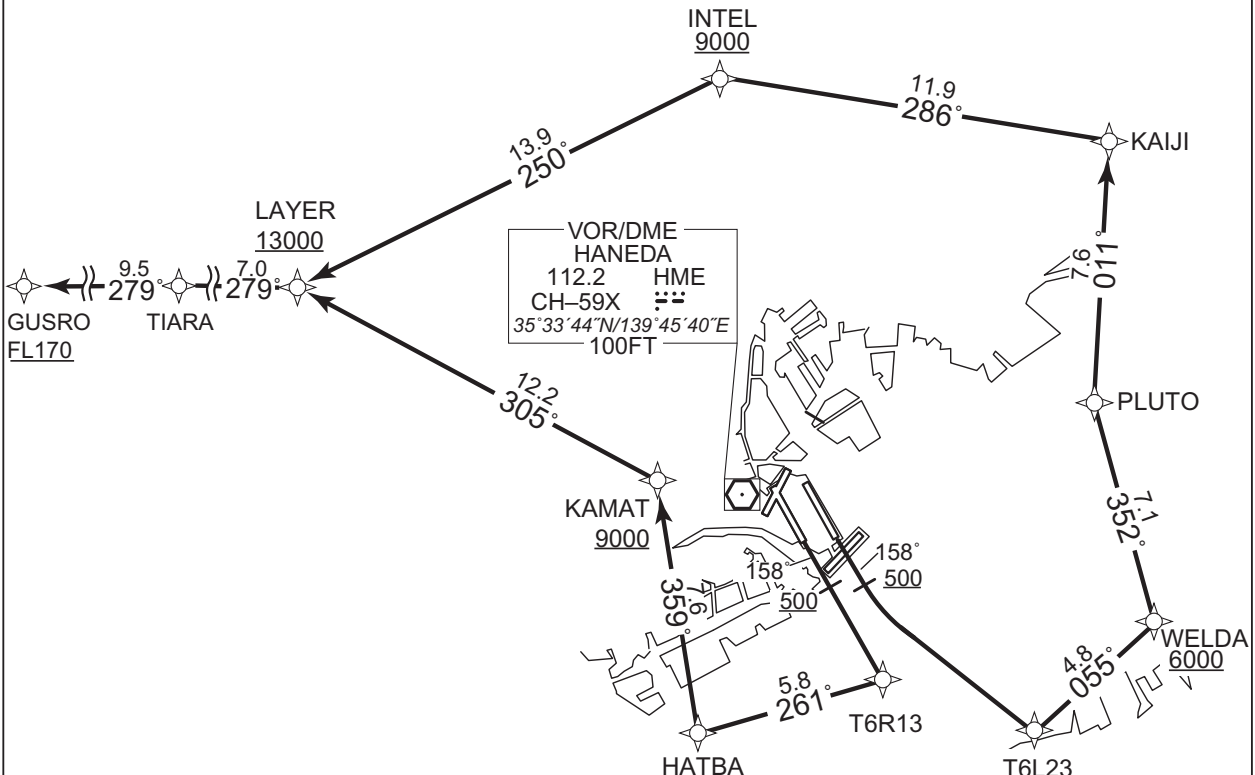

CHANGE : New PROC.


STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAR8°W

TIARA ONE B DEPARTURE RWY 34R/05

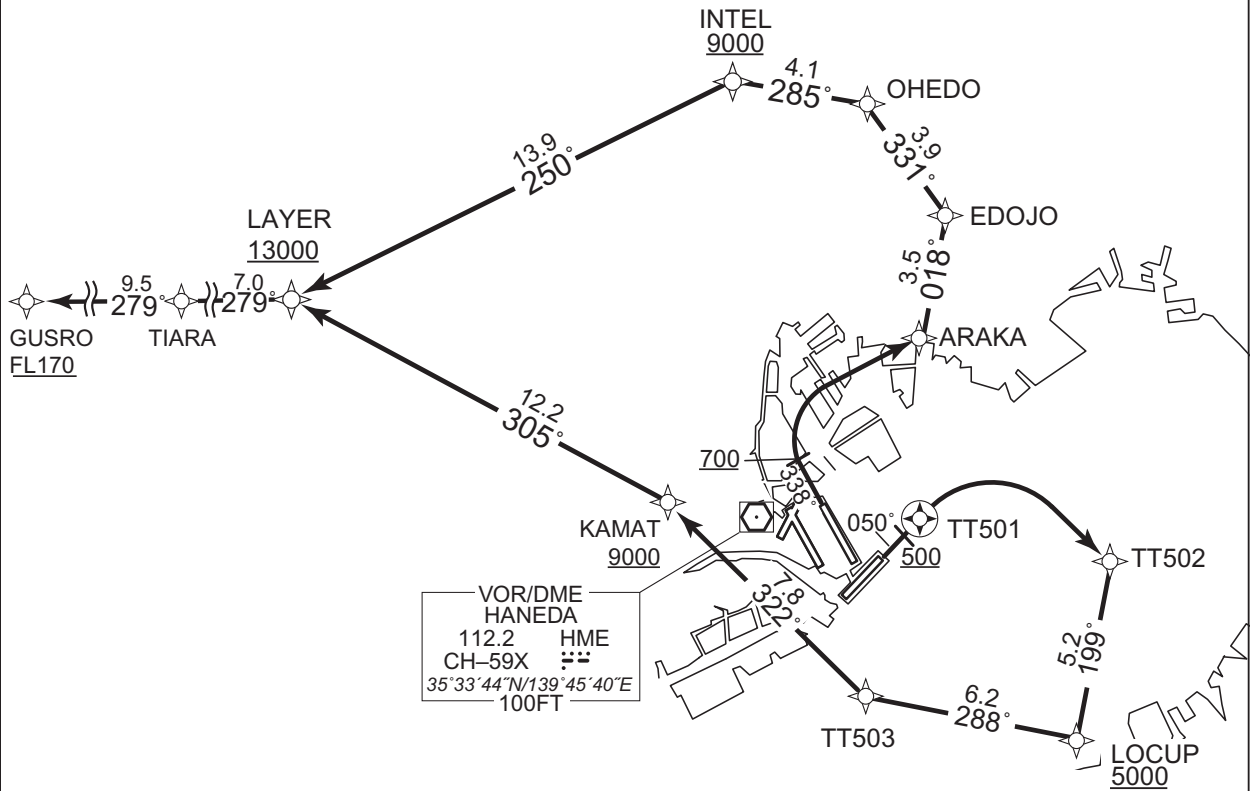

CHANGE : New PROC.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA ONE B DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13, to HATBA, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to GUSRO at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to GUSRO at or above FL170.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA, to EDOJO, to OHEDO, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to GUSRO at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to GUSRO at or above FL170.

Note RWY34R : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA ONE B DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6R13	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	HATBA	-	261 (253.8)	-7.6	5.8	-	-	-	-	RNAV1
004	TF	KAMAT	-	359 (351.1)	-7.6	7.6	-	+9000	-	-	RNAV1
005	TF	LAYER	-	305 (297.1)	-7.6	12.2	-	+13000	-	-	RNAV1
006	TF	TIARA	-	279 (271.2)	-7.6	7.0	-	-	-	-	RNAV1
007	TF	GUSRO	-	279 (271.1)	-7.6	9.5	-	+FL170	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6L23	-	-	-7.6	-	L	-	-	-	RNAV1
003	TF	WELDA	-	055 (047.3)	-7.6	4.8	-	+6000	-	-	RNAV1
004	TF	PLUTO	-	352 (344.5)	-7.6	7.1	-	-	-	-	RNAV1
005	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
006	TF	INTEL	-	286 (278.4)	-7.6	11.9	-	+9000	-	-	RNAV1
007	TF	LAYER	-	250 (242.4)	-7.6	13.9	-	+13000	-	-	RNAV1
008	TF	TIARA	-	279 (271.2)	-7.6	7.0	-	-	-	-	RNAV1
009	TF	GUSRO	-	279 (271.1)	-7.6	9.5	-	+FL170	-	-	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.6	-	-	+700	-	-	RNAV1
002	DF	ARAKA	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	EDOJO	-	018 (010.8)	-7.6	3.5	-	-	-	-	RNAV1
004	TF	OHEDO	-	331 (323.7)	-7.6	3.9	-	-	-	-	RNAV1
005	TF	INTEL	-	285 (277.0)	-7.6	4.1	-	+9000	-	-	RNAV1
006	TF	LAYER	-	250 (242.4)	-7.6	13.9	-	+13000	-	-	RNAV1
007	TF	TIARA	-	279 (271.2)	-7.6	7.0	-	-	-	-	RNAV1
008	TF	GUSRO	-	279 (271.1)	-7.6	9.5	-	+FL170	-	-	RNAV1

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.6	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
005	TF	TT503	-	288 (280.8)	-7.6	6.2	-	-	-	-	RNAV1
006	TF	KAMAT	-	322 (314.2)	-7.6	7.8	-	+9000	-	-	RNAV1
007	TF	LAYER	-	305 (297.1)	-7.6	12.2	-	+13000	-	-	RNAV1
008	TF	TIARA	-	279 (271.2)	-7.6	7.0	-	-	-	-	RNAV1
009	TF	GUSRO	-	279 (271.1)	-7.6	9.5	-	+FL170	-	-	RNAV1


Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	OHEDO	354523.4N / 1394838.6E
EDOJO	354214.0N / 1395129.9E	PLUTO	353632.1N / 1395736.8E
GUSRO	353944.8N / 1390813.1E	T6L23	352627.6N / 1395539.1E
HATBA	352623.4N / 1394315.9E	T6R13	352800.8N / 1395006.4E
INTEL	354553.0N / 1394340.2E	TIARA	353934.0N / 1391954.2E
KAIJI	354409.6N / 1395806.6E	TT501	353328.7N / 1395029.9E
KAMAT	353353.6N / 1394148.9E	TT502	353224.4N / 1395720.7E
LAYER	353925.4N / 1392829.5E	TT503	352828.0N / 1394840.4E
LOCUP	352718.8N / 1395608.5E	WELDA	352941.4N / 1395956.7E

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL		TIARA ONE C DEPARTURE		RNAV SID
				RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.				RWY16R : HME 1.2NM FM DER - 1.9NM to T6R11 PQD 6.6NM to KAIJI - KAIJI NRE 6.9NM to INTEL - 6.9NM to LAYER RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23 PQD 6.6NM to KAIJI - KAIJI NRE 6.9NM to INTEL - 6.9NM to LAYER RWY05 : HME DER - 2.7NM to TT502 TT503 - 3.8NM to KAMAT 1.8NM to KAMAT - KAMAT HYD 1.2NM to TT503 - TT503 4.8NM to KAMAT - 3.8NM to KAMAT
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 1.0NM FM DER RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT	Critical DME		
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1			

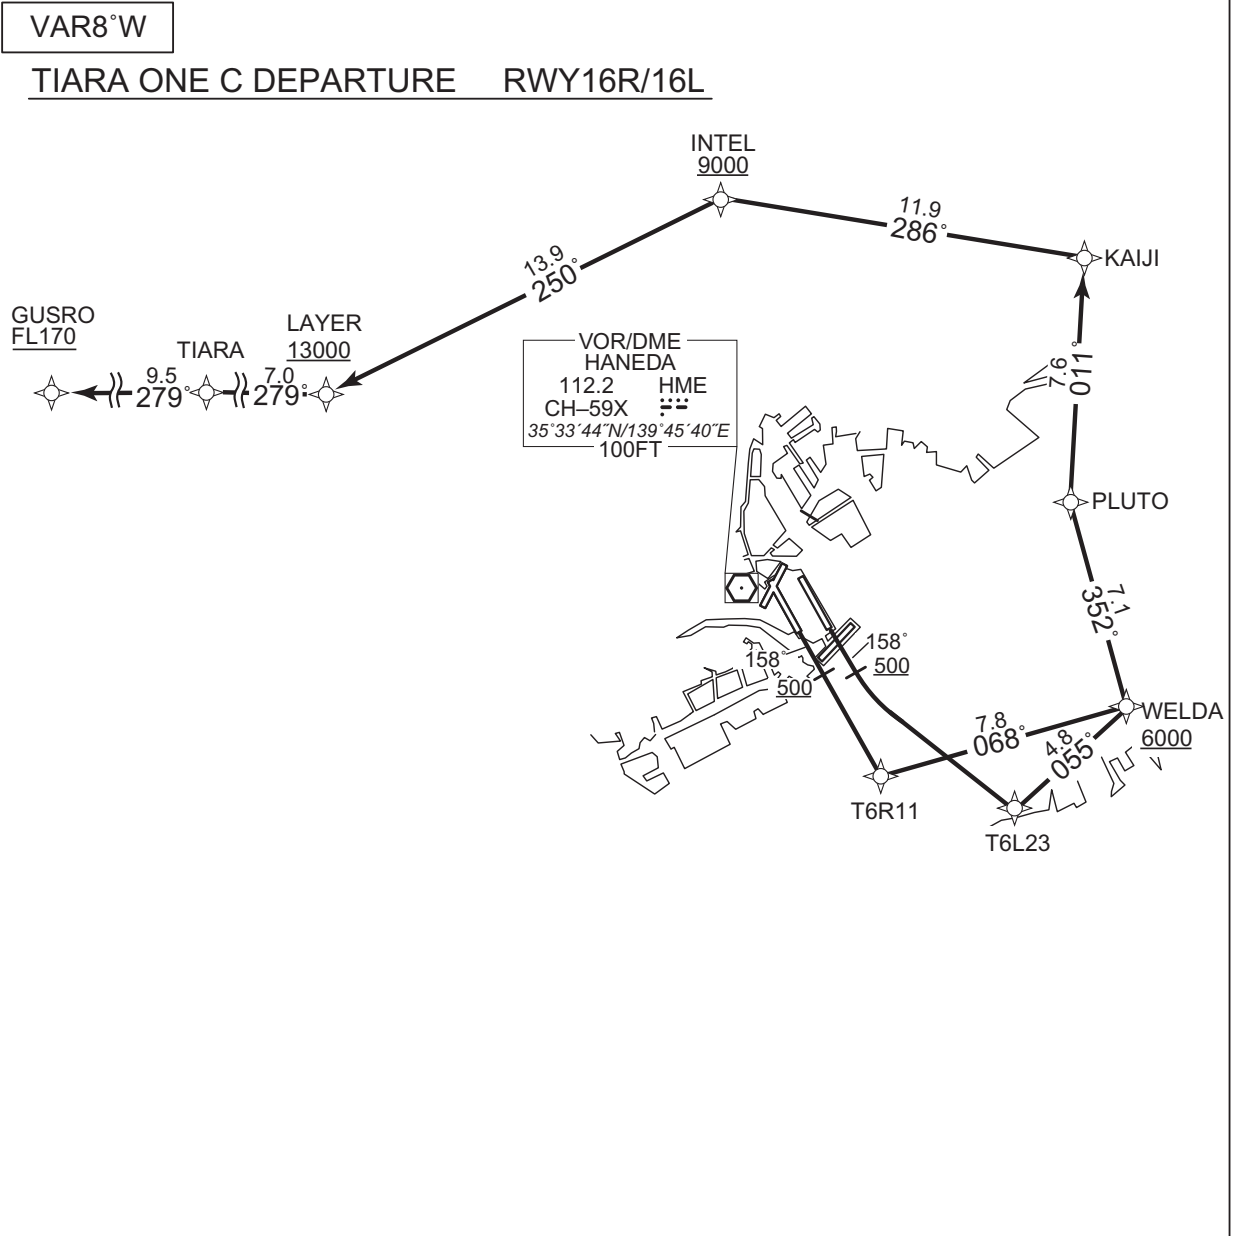

CHANGE : New PROC.


STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAR8°W

TIARA ONE C DEPARTURE RWY 34R/05

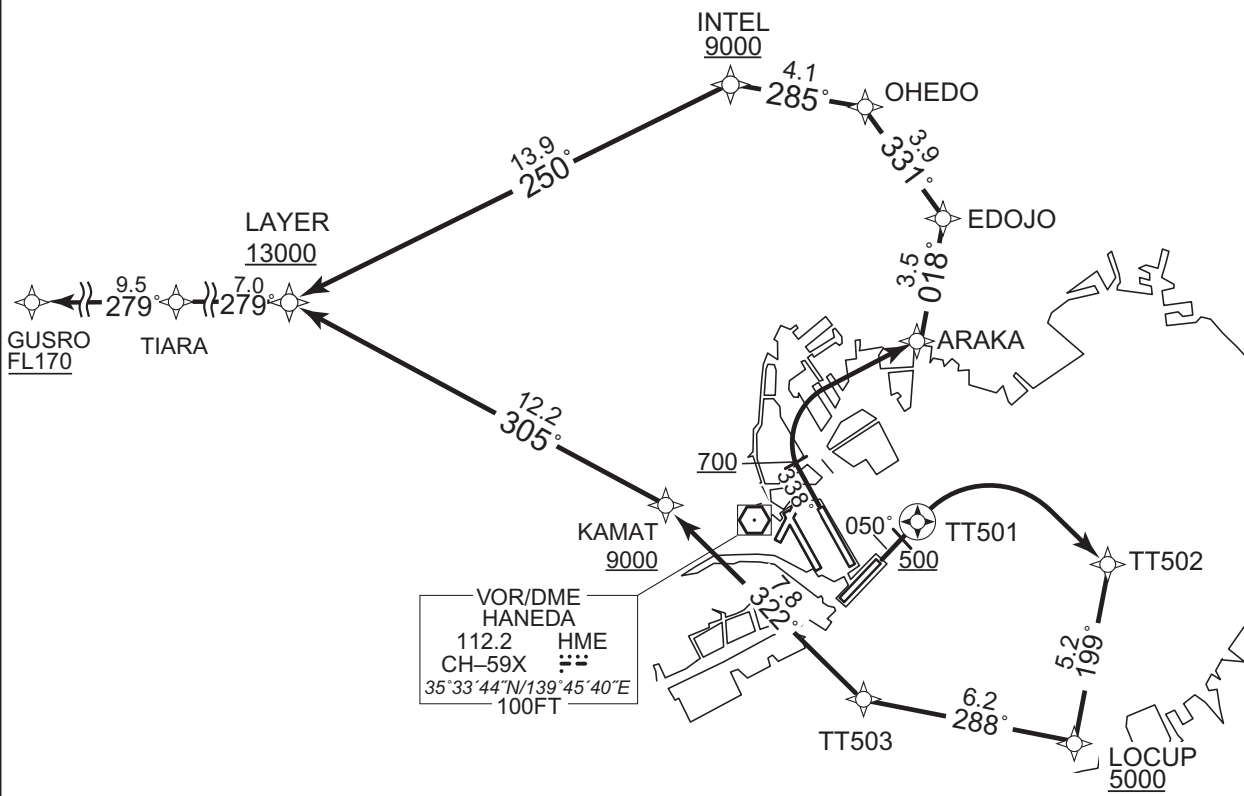



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA ONE C DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,  
to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL  
at or above 9000FT, to LAYER at or above 13000FT, to TIARA,  
to GUSRO at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23,  
to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or  
above 9000FT, to LAYER at or above 13000FT, to TIARA,  
to GUSRO at or above FL170.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA,  
to EDOJO, to OHEDO, to INTEL at or above 9000FT, to LAYER  
at or above 13000FT, to TIARA, to GUSRO at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right  
direct to TT502, to LOCUP at or above 5000FT, to TT503, to  
KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA,  
to GUSRO at or above FL170.

Note RWY34R : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : New PROC.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA ONE C DEPARTURE

## RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	WELDA	—	068 (060.6)	-7.6	7.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.6	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.6	11.9	—	+9000	—	—	RNAV1
007	TF	LAYER	—	250 (242.4)	-7.6	13.9	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
009	TF	GUSRO	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

## RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.6	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.6	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.6	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.6	11.9	—	+9000	—	—	RNAV1
007	TF	LAYER	—	250 (242.4)	-7.6	13.9	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
009	TF	GUSRO	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

## RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.6	—	—	+700	—	—	RNAV1
002	DF	ARAKA	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	EDOJO	—	018 (010.8)	-7.6	3.5	—	—	—	—	RNAV1
004	TF	OHEDO	—	331 (323.7)	-7.6	3.9	—	—	—	—	RNAV1
005	TF	INTEL	—	285 (277.0)	-7.6	4.1	—	+9000	—	—	RNAV1
006	TF	LAYER	—	250 (242.4)	-7.6	13.9	—	+13000	—	—	RNAV1
007	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
008	TF	GUSRO	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.6	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
005	TF	TT503	-	288 (280.8)	-7.6	6.2	-	-	-	-	RNAV1
006	TF	KAMAT	-	322 (314.2)	-7.6	7.8	-	+9000	-	-	RNAV1
007	TF	LAYER	-	305 (297.1)	-7.6	12.2	-	+13000	-	-	RNAV1
008	TF	TIARA	-	279 (271.2)	-7.6	7.0	-	-	-	-	RNAV1
009	TF	GUSRO	-	279 (271.1)	-7.6	9.5	-	+FL170	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	PLUTO	353632.1N / 1395736.8E
EDOJO	354214.0N / 1395129.9E	T6L23	352627.6N / 1395539.1E
GUSRO	353944.8N / 1390813.1E	T6R11	352552.5N / 1395137.2E
INTEL	354553.0N / 1394340.2E	TIARA	353934.0N / 1391954.2E
KAIJI	354409.6N / 1395806.6E	TT501	353328.7N / 1395029.9E
KAMAT	353353.6N / 1394148.9E	TT502	353224.4N / 1395720.7E
LAYER	353925.4N / 1392829.5E	TT503	352828.0N / 1394840.4E
LOCUP	352718.8N / 1395608.5E	WELDA	352941.4N / 1395956.7E
OHEDO	354523.4N / 1394838.6E		

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO A DEPARTURE

RNAV1

Note 1) DME/DME/IRU or GNSS required.  
 ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling.  
 2) RADAR service required.

DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 1.0NM FM DER RWY34L : DER - 0.5NM FM DER RWY04 : DER - 1.7NM FM DER RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT
Inappropriate Navaids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1


Critical DME

- RWY16R : HME 1.2NM FM DER - HATBA  
 HYD 2.8NM to HATBA - 1.6NM to HATBA  
 PQD HATBA - 1.6NM to KAMAT
- RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23  
 PQD 6.6NM to KAIJI - KAIJI  
 NRE 6.9NM to INTEL - INTEL
- RWY34R : HME 1.0NM FM DER - 1.1NM to PLUTO  
 SND TORAM - 3.1NM to PLUTO  
 PQD 6.6NM to KAIJI - KAIJI  
 NRE 6.9NM to INTEL - INTEL
- RWY34L : HME 0.5NM FM DER - 1.1NM to PLUTO  
 SND TORAM - 3.1NM to PLUTO  
 PQD 6.6NM to KAIJI - KAIJI  
 NRE 6.9NM to INTEL - INTEL
- RWY04 : HME 1.7NM FM DER - 1.1NM to PLUTO  
 SND 2.2NM to TORAM - 3.1NM to PLUTO  
 PQD 6.6NM to KAIJI - KAIJI  
 NRE 6.9NM to INTEL - INTEL
- RWY05 : HME DER - 2.7NM to TT502  
 TT503 - 3.8NM to KAMAT  
 1.8NM to KAMAT - KAMAT  
 HYD 1.2NM to TT503 - TT503  
 4.8NM to KAMAT - 3.8NM to KAMAT

VAR8°W(2020)

BEKLA TWO A DEPARTURE RWY16R/16L


CHANGE : PROC renamed. VAR. RTE after KAMAT.

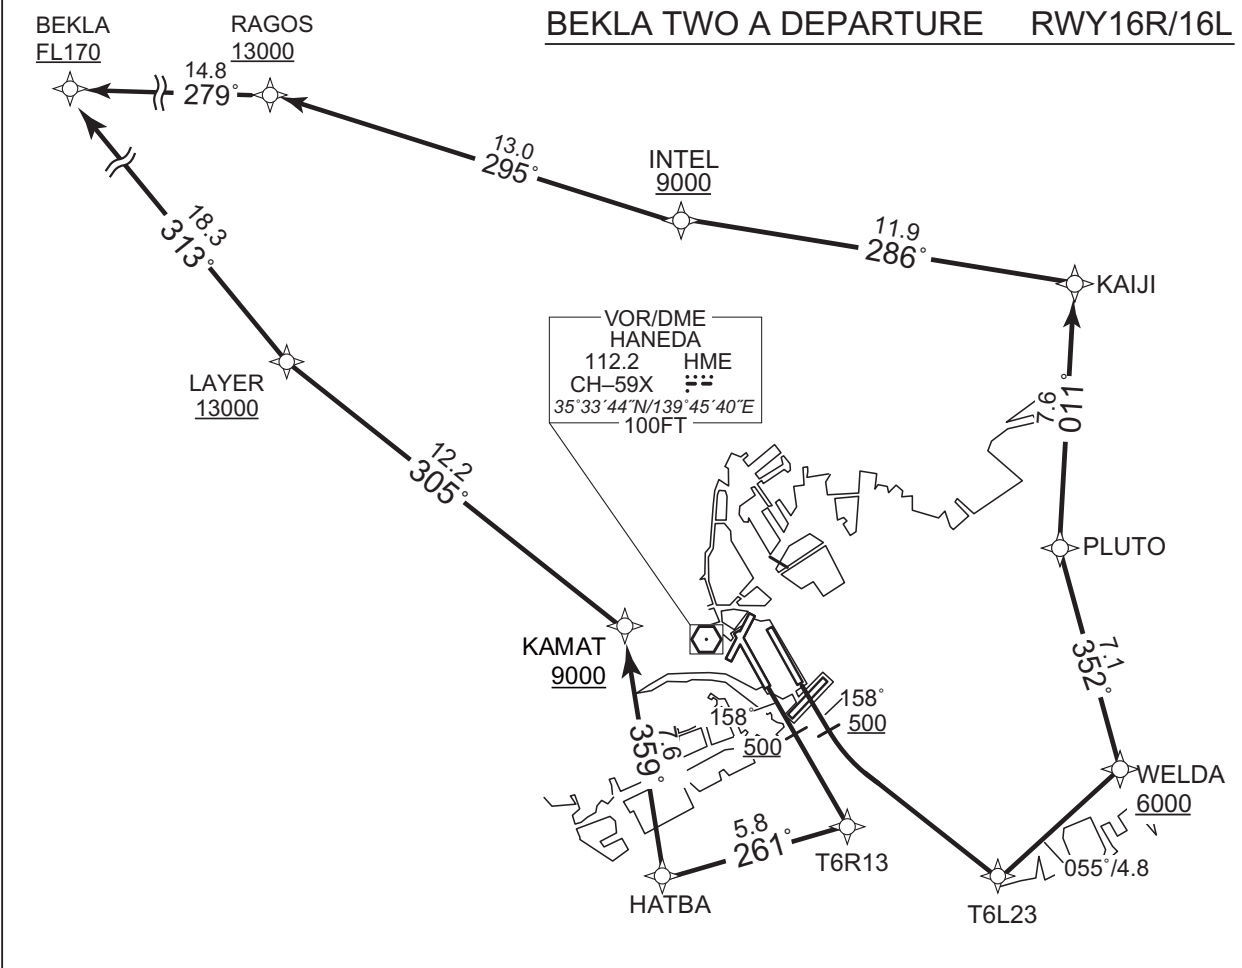

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

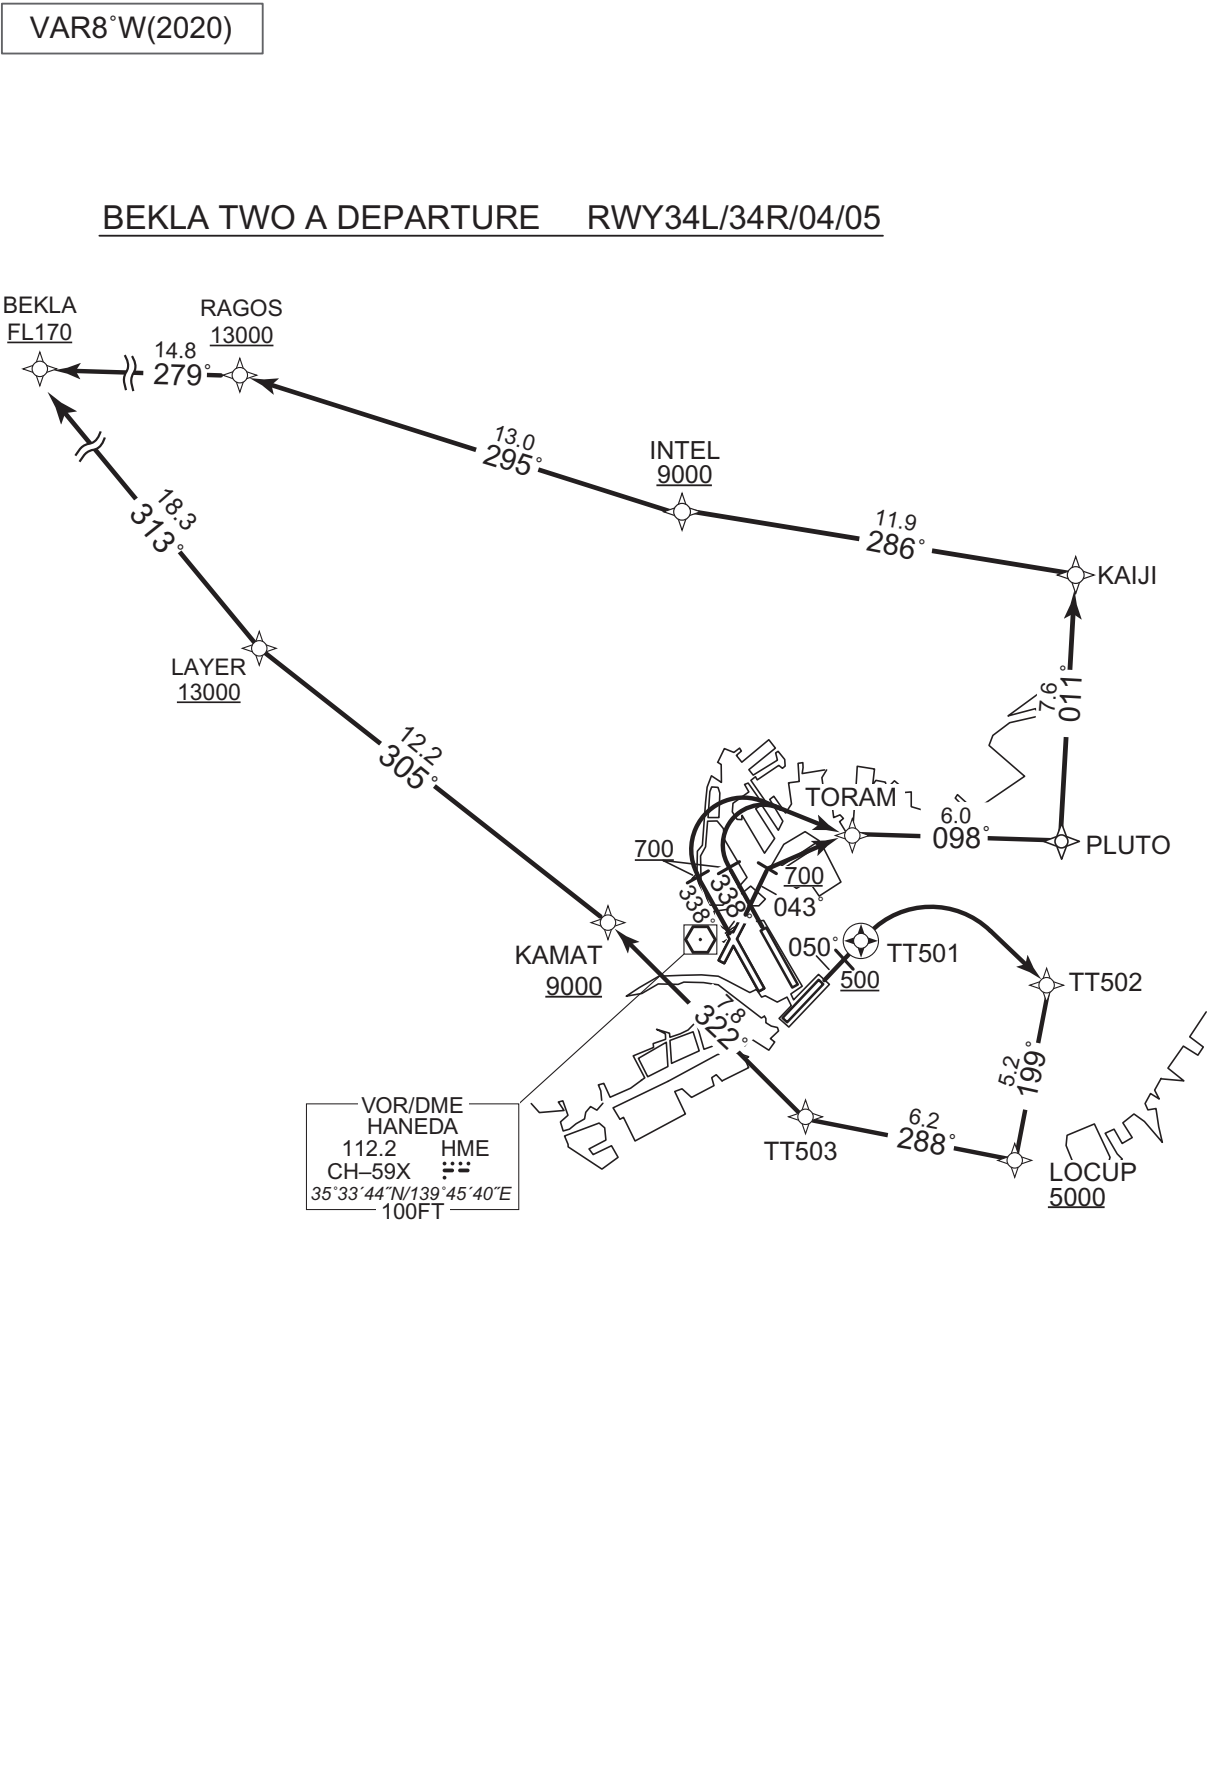

## STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO A DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13, to HATBA, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TORAM, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY04 : Climb on HDG 043° at or above 700FT, direct to TORAM, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.  
RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. RTE after KAMAT(RWY16R.05). HDG after DEP FM RWY04.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO A DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6R13	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	HATBA	-	261 (253.8)	-7.6	5.8	-	-	-	-	RNAV1
004	TF	KAMAT	-	359 (351.1)	-7.6	7.6	-	+9000	-	-	RNAV1
005	TF	LAYER	-	305 (297.1)	-7.6	12.2	-	+13000	-	-	RNAV1
006	TF	BEKLA	-	313 (305.4)	-7.6	18.3	-	+FL170	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6L23	-	-	-7.6	-	L	-	-	-	RNAV1
003	TF	WELDA	-	055 (047.3)	-7.6	4.8	-	+6000	-	-	RNAV1
004	TF	PLUTO	-	352 (344.5)	-7.6	7.1	-	-	-	-	RNAV1
005	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
006	TF	INTEL	-	286 (278.4)	-7.6	11.9	-	+9000	-	-	RNAV1
007	TF	RAGOS	-	295 (287.2)	-7.6	13.0	-	+13000	-	-	RNAV1
008	TF	BEKLA	-	279 (271.2)	-7.6	14.8	-	+FL170	-	-	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TORAM	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	PLUTO	-	098 (090.7)	-7.6	6.0	-	-	-	-	RNAV1
004	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
005	TF	INTEL	-	286 (278.4)	-7.6	11.9	-	+9000	-	-	RNAV1
006	TF	RAGOS	-	295 (287.2)	-7.6	13.0	-	+13000	-	-	RNAV1
007	TF	BEKLA	-	279 (271.2)	-7.6	14.8	-	+FL170	-	-	RNAV1

CHANGE : PROC renamed. Magnetic Variation. RWY16R:RTE after KAMAT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	043 (034.9)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TORAM	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	PLUTO	-	098 (090.7)	-7.6	6.0	-	-	-	-	RNAV1
004	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
005	TF	INTEL	-	286 (278.4)	-7.6	11.9	-	+9000	-	-	RNAV1
006	TF	RAGOS	-	295 (287.2)	-7.6	13.0	-	+13000	-	-	RNAV1
007	TF	BEKLA	-	279 (271.2)	-7.6	14.8	-	+FL170	-	-	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.6	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
005	TF	TT503	-	288 (280.8)	-7.6	6.2	-	-	-	-	RNAV1
006	TF	KAMAT	-	322 (314.2)	-7.6	7.8	-	+9000	-	-	RNAV1
007	TF	LAYER	-	305 (297.1)	-7.6	12.2	-	+13000	-	-	RNAV1
008	TF	BEKLA	-	313 (305.4)	-7.6	18.3	-	+FL170	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BEKLA	354958.7N / 1391009.5E	RAGOS	354942.2N / 1392821.2E
HATBA	352623.4N / 1394315.9E	T6L23	352627.6N / 1395539.1E
INTEL	354553.0N / 1394340.2E	T6R13	352800.8N / 1395006.4E
KAIJI	354409.6N / 1395806.6E	TORAM	353636.8N / 1395011.0E
KAMAT	353353.6N / 1394148.9E	TT501	353328.7N / 1395029.9E
LAYER	353925.4N / 1392829.5E	TT502	353224.4N / 1395720.7E
LOCUP	352718.8N / 1395608.5E	TT503	352828.0N / 1394840.4E
PLUTO	353632.1N / 1395736.8E	WELDA	352941.4N / 1395956.7E

CHANGE : Magnetic Variation. RWY04:NR001(Course). RWY05:NR004(Course),RTE after KAMAT. Waypoint Coordinates(LAYER added).



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL


RNAV SID

BEKLA TWO B DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		RWY16R : HME 1.2NM FM DER - HATBA HYD 2.8NM to HATBA - 1.6NM to HATBA PQD HATBA - 1.6NM to KAMAT RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23 PQD 6.6NM to KAIJI - KAIJI NRE 6.9NM to INTEL - INTEL RWY05 : HME DER - 2.7NM to TT502 TT503 - 3.8NM to KAMAT 1.8NM to KAMAT - KAMAT HYD 1.2NM to TT503 - TT503 4.8NM to KAMAT - 3.8NM to KAMAT
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 1.0NM FM DER RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT	
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDS for RNAV1	

VAR8°W(2020)

BEKLA TWO B DEPARTURE RWY16R/16L

CHANGE : PROC renamed. VAR. RTE after KAMAT.

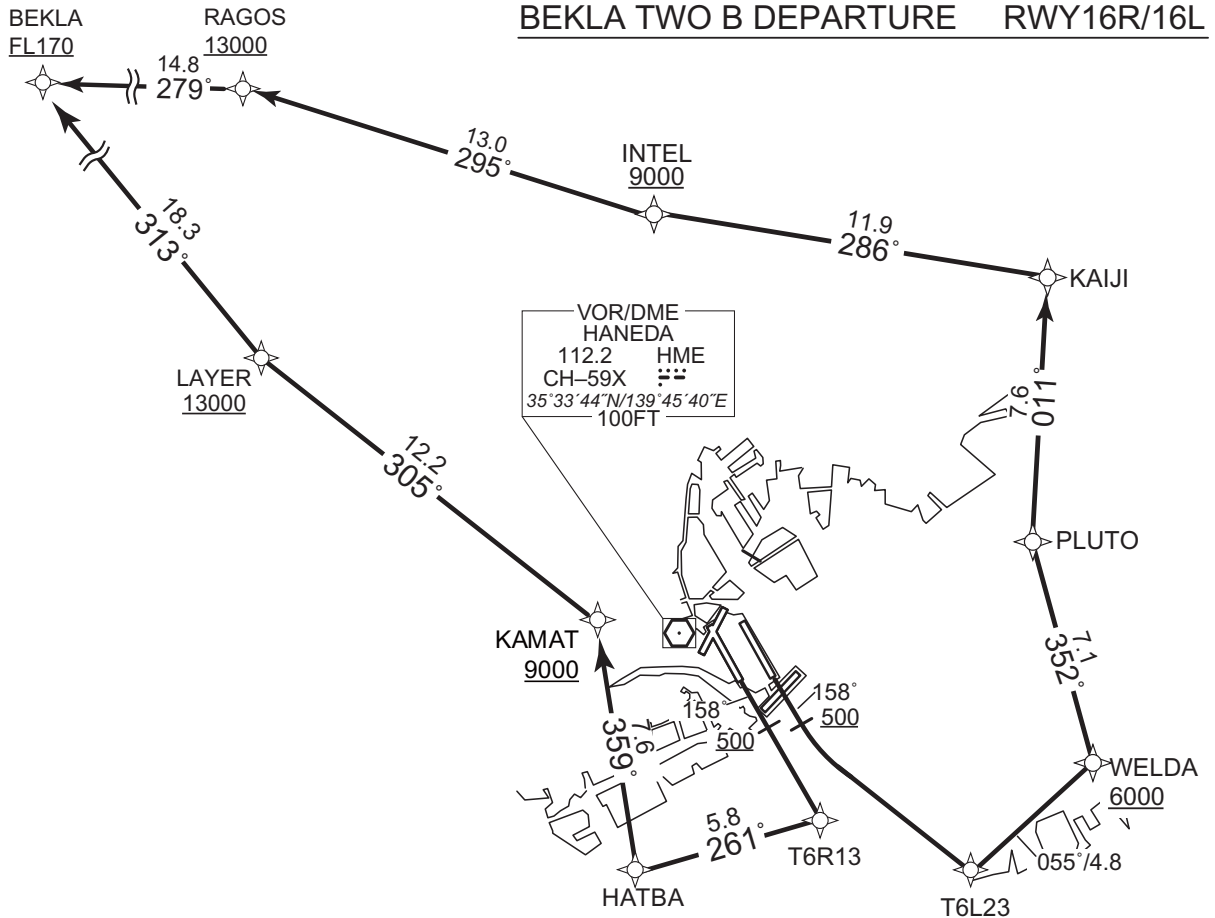


STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAR8°W(2020)

BEKLA TWO B DEPARTURE RWY34R/05

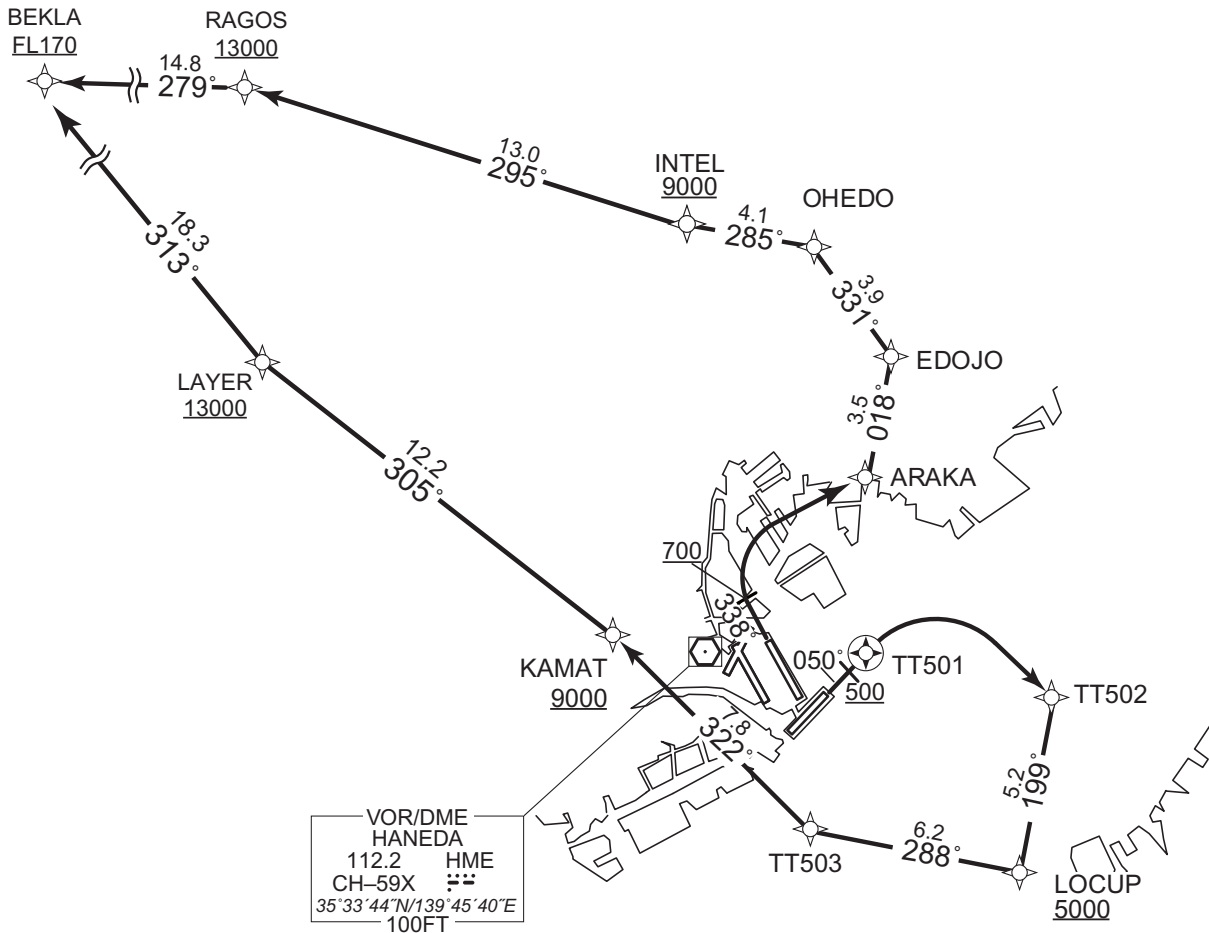

CHANGE : PROC renamed. VAR. RTE after KAMAT. Course FM TT502 to LOCUP.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO B DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13, to HATBA, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA, to EDOJO, to OHEDO, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

Note RWY34R : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. RTE after KAMAT (RWY16R,05).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO B DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6R13	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	HATBA	-	261 (253.8)	-7.6	5.8	-	-	-	-	RNAV1
004	TF	KAMAT	-	359 (351.1)	-7.6	7.6	-	+9000	-	-	RNAV1
005	TF	LAYER	-	305 (297.1)	-7.6	12.2	-	+13000	-	-	RNAV1
006	TF	BEKLA	-	313 (305.4)	-7.6	18.3	-	+FL170	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6L23	-	-	-7.6	-	L	-	-	-	RNAV1
003	TF	WELDA	-	055 (047.3)	-7.6	4.8	-	+6000	-	-	RNAV1
004	TF	PLUTO	-	352 (344.5)	-7.6	7.1	-	-	-	-	RNAV1
005	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
006	TF	INTEL	-	286 (278.4)	-7.6	11.9	-	+9000	-	-	RNAV1
007	TF	RAGOS	-	295 (287.2)	-7.6	13.0	-	+13000	-	-	RNAV1
008	TF	BEKLA	-	279 (271.2)	-7.6	14.8	-	+FL170	-	-	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.6	-	-	+700	-	-	RNAV1
002	DF	ARAKA	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	EDOJO	-	018 (010.8)	-7.6	3.5	-	-	-	-	RNAV1
004	TF	OHEDO	-	331 (323.7)	-7.6	3.9	-	-	-	-	RNAV1
005	TF	INTEL	-	285 (277.0)	-7.6	4.1	-	+9000	-	-	RNAV1
006	TF	RAGOS	-	295 (287.2)	-7.6	13.0	-	+13000	-	-	RNAV1
007	TF	BEKLA	-	279 (271.2)	-7.6	14.8	-	+FL170	-	-	RNAV1

CHANGE : PROC renamed. Magnetic Variation. RWY16R:RTE after KAMAT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.6	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
005	TF	TT503	-	288 (280.8)	-7.6	6.2	-	-	-	-	RNAV1
006	TF	KAMAT	-	322 (314.2)	-7.6	7.8	-	+9000	-	-	RNAV1
007	TF	LAYER	-	305 (297.1)	-7.6	12.2	-	+13000	-	-	RNAV1
008	TF	BEKLA	-	313 (305.4)	-7.6	18.3	-	+FL170	-	-	RNAV1

CHANGE : Magnetic Variation. RWY05:NR004(Course),RTE after KAMAT. Waypoint Coordinates(LAYER added).

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	OHEDO	354523.4N / 1394838.6E
BEKLA	354958.7N / 1391009.5E	PLUTO	353632.1N / 1395736.8E
EDOJO	354214.0N / 1395129.9E	RAGOS	354942.2N / 1392821.2E
HATBA	352623.4N / 1394315.9E	T6L23	352627.6N / 1395539.1E
INTEL	354553.0N / 1394340.2E	T6R13	352800.8N / 1395006.4E
KAIJI	354409.6N / 1395806.6E	TT501	353328.7N / 1395029.9E
KAMAT	353353.6N / 1394148.9E	TT502	353224.4N / 1395720.7E
LAYER	353925.4N / 1392829.5E	TT503	352828.0N / 1394840.4E
LOCUP	352718.8N / 1395608.5E	WELDA	352941.4N / 1395956.7E

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA THREE C DEPARTURE

RNAV1

Note 1) DME/DME/IRU or GNSS required.  
 ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling.  
 2) RADAR service required.

DME GAP

RWY16R : DER - 1.2NM FM DER  
 RWY16L : DER - 1.0NM FM DER  
 RWY34R : DER - 1.0NM FM DER  
 RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT


Critical DME

RWY16R : HME 1.2NM FM DER - 1.9NM to T6R11  
 PQD 6.6NM to KAIJI - KAIJI  
 NRE 6.9NM to INTEL - INTEL  
 RWY16L : NRE 6.9NM to INTEL - INTEL  
 RWY05 : HME DER - 2.7NM to TT502  
 TT503 - 3.8NM to KAMAT  
 1.8NM to KAMAT - KAMAT  
 HYD 1.2NM to TT503 - TT503  
 4.8NM to KAMAT - 3.8NM to KAMAT

Inappropriate Nav aids See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1

VAR8°W

BEKLA THREE C DEPARTURE RWY16R/16L

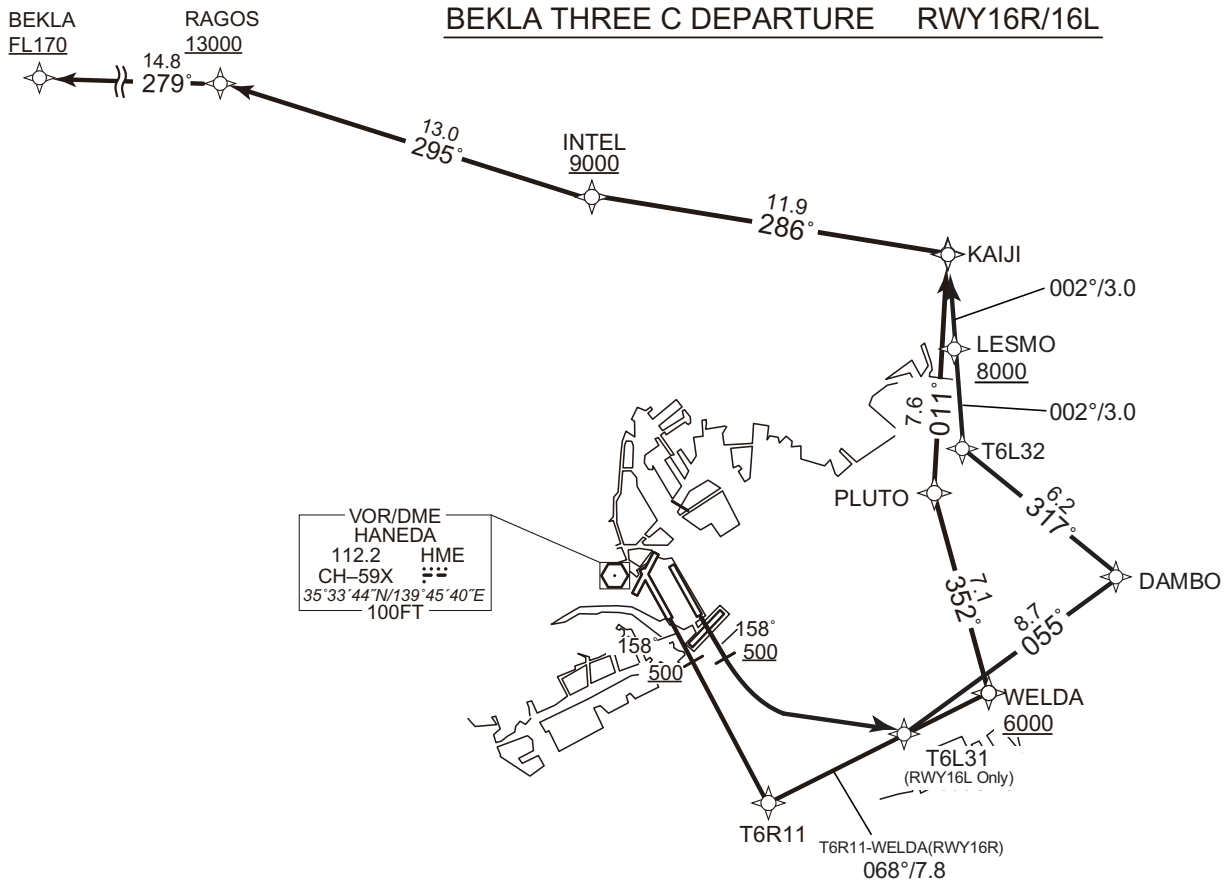

CHANGE : PROC renamed. PROC course until KAIJI(RWY16L).


STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAR8°W

BEKLA THREE C DEPARTURE RWY34R/05

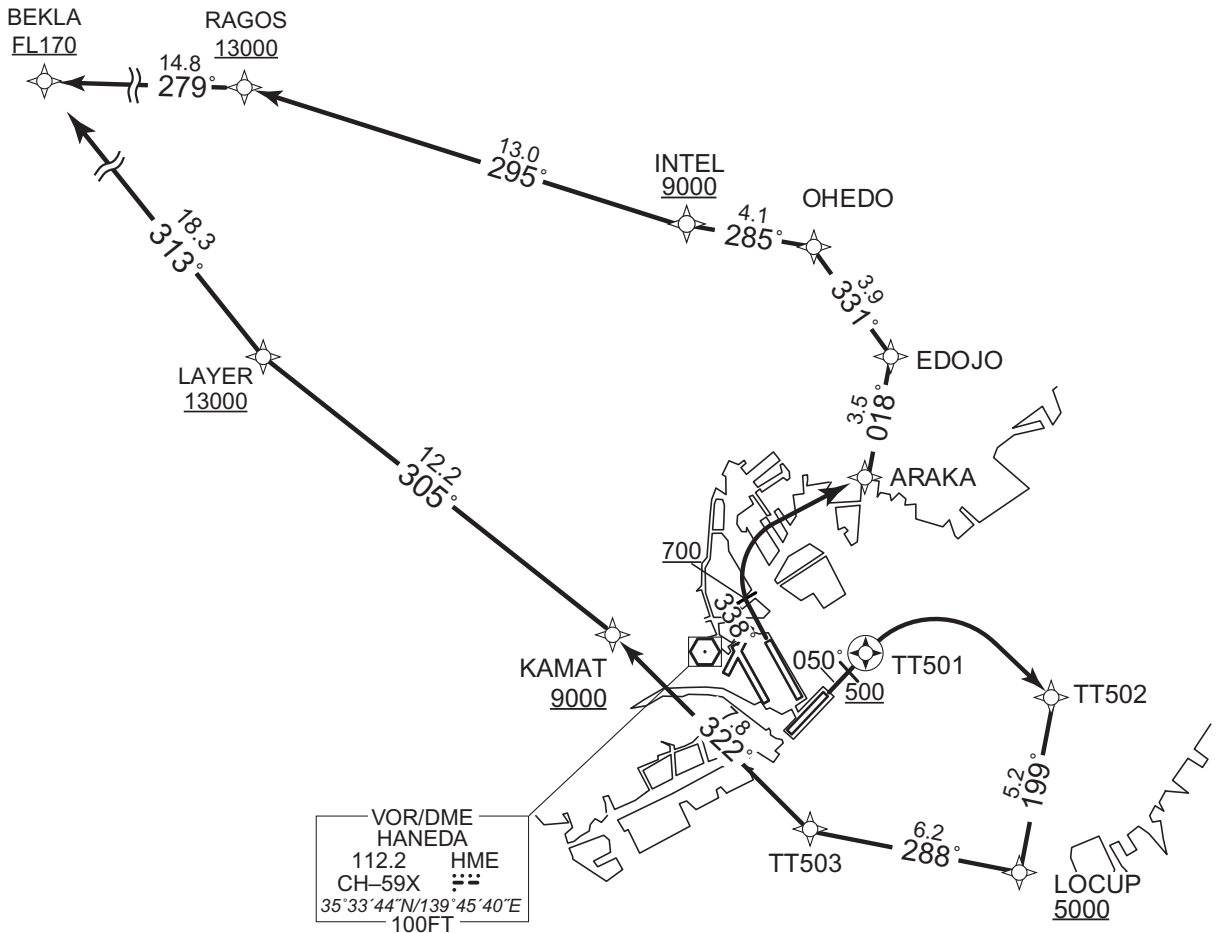

CHANGE : PROC renamed.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA THREE C DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,  
to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL  
at or above 9000FT, to RAGOS at or above 13000FT,  
to BEKLA at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L31,  
to DAMBO, to T6L32, to LESMO at or above 8000FT, to KAIJI,  
to INTEL at or above 9000FT, to RAGOS at or above 13000FT,  
to BEKLA at or above FL170.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA,  
to EDOJO, to OHEDO, to INTEL at or above 9000FT, to RAGOS  
at or above 13000FT, to BEKLA at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right  
direct to TT502, to LOCUP at or above 5000FT, to TT503, to  
KAMAT at or above 9000FT, to LAYER at or above 13000FT, to  
BEKLA at or above FL170.

Note RWY34R : 5.0% climb gradient required up to 700FT.  
RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. PROC course(RWY16L).



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA THREE C DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6R11	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	WELDA	-	068 (060.6)	-7.6	7.8	-	+6000	-	-	RNAV1
004	TF	PLUTO	-	352 (344.5)	-7.6	7.1	-	-	-	-	RNAV1
005	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
006	TF	INTEL	-	286 (278.4)	-7.6	11.9	-	+9000	-	-	RNAV1
007	TF	RAGOS	-	295 (287.2)	-7.6	13.0	-	+13000	-	-	RNAV1
008	TF	BEKLA	-	279 (271.2)	-7.6	14.8	-	+FL170	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6L31	-	-	-7.6	-	L	-	-	-	RNAV1
003	TF	DAMBO	-	055 (047.5)	-7.6	8.7	-	-	-	-	RNAV1
004	TF	T6L32	-	317 (309.4)	-7.6	6.2	-	-	-	-	RNAV1
005	TF	LESMO	-	002 (354.1)	-7.6	3.0	-	+8000	-	-	RNAV1
006	TF	KAIJI	-	002 (354.1)	-7.6	3.0	-	-	-	-	RNAV1
007	TF	INTEL	-	286 (278.4)	-7.6	11.9	-	+9000	-	-	RNAV1
008	TF	RAGOS	-	295 (287.2)	-7.6	13.0	-	+13000	-	-	RNAV1
009	TF	BEKLA	-	279 (271.2)	-7.6	14.8	-	+FL170	-	-	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.6	-	-	+700	-	-	RNAV1
002	DF	ARAKA	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	EDOJO	-	018 (010.8)	-7.6	3.5	-	-	-	-	RNAV1
004	TF	OHEDO	-	331 (323.7)	-7.6	3.9	-	-	-	-	RNAV1
005	TF	INTEL	-	285 (277.0)	-7.6	4.1	-	+9000	-	-	RNAV1
006	TF	RAGOS	-	295 (287.2)	-7.6	13.0	-	+13000	-	-	RNAV1
007	TF	BEKLA	-	279 (271.2)	-7.6	14.8	-	+FL170	-	-	RNAV1

CHANGE : PROC renamed. PROC course(RWY16L).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.6	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
005	TF	TT503	-	288 (280.8)	-7.6	6.2	-	-	-	-	RNAV1
006	TF	KAMAT	-	322 (314.2)	-7.6	7.8	-	+9000	-	-	RNAV1
007	TF	LAYER	-	305 (297.1)	-7.6	12.2	-	+13000	-	-	RNAV1
008	TF	BEKLA	-	313 (305.4)	-7.6	18.3	-	+FL170	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	OHEDO	354523.4N / 1394838.6E
BEKLA	354958.7N / 1391009.5E	PLUTO	353632.1N / 1395736.8E
DAMBO	353416.5N / 1400443.4E	RAGOS	354942.2N / 1392821.2E
EDOJO	354214.0N / 1395129.9E	T6L31	352822.8N / 1395648.0E
INTEL	354553.0N / 1394340.2E	T6L32	353810.9N / 1395852.2E
KAIJI	354409.6N / 1395806.6E	T6R11	352552.5N / 1395137.2E
KAMAT	353353.6N / 1394148.9E	TT501	353328.7N / 1395029.9E
LAYER	353925.4N / 1392829.5E	TT502	353224.4N / 1395720.7E
LESMO	354110.3N / 1395829.4E	TT503	352828.0N / 1394840.4E
LOCUP	352718.8N / 1395608.5E	WELDA	352941.4N / 1395956.7E

CHANGE : PROC course(RWY16L).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL


RNAV SID

ROVER TWO A DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		RWY16R : HME 1.2NM FM DER - 1.9NM to T6R11 PQD 6.6NM to KAIJI - KAIJI RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23 PQD 6.6NM to KAIJI - KAIJI RWY34R : HME 1.0NM FM DER - 1.1NM to PLUTO SND TORAM - 3.1NM to PLUTO PQD 6.6NM to KAIJI - KAIJI RWY34L : HME 0.5NM FM DER - 1.1NM to PLUTO SND TORAM - 3.1NM to PLUTO PQD 6.6NM to KAIJI - KAIJI RWY04 : HME 1.7NM FM DER - 1.1NM to PLUTO SND 2.2NM to TORAM - 3.1NM to PLUTO PQD 6.6NM to KAIJI - KAIJI RWY05 : HME DER - 2.2NM to PLUTO PQD 6.6NM to KAIJI - KAIJI
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 1.0NM FM DER RWY34L : DER - 0.5NM FM DER RWY04 : DER - 1.7NM FM DER	Critical DME
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1	

VAR8°W(2020)

ROVER TWO A DEPARTURE

CHANGE : PROC renamed. VAR. HDG after DEP FM RWY04.

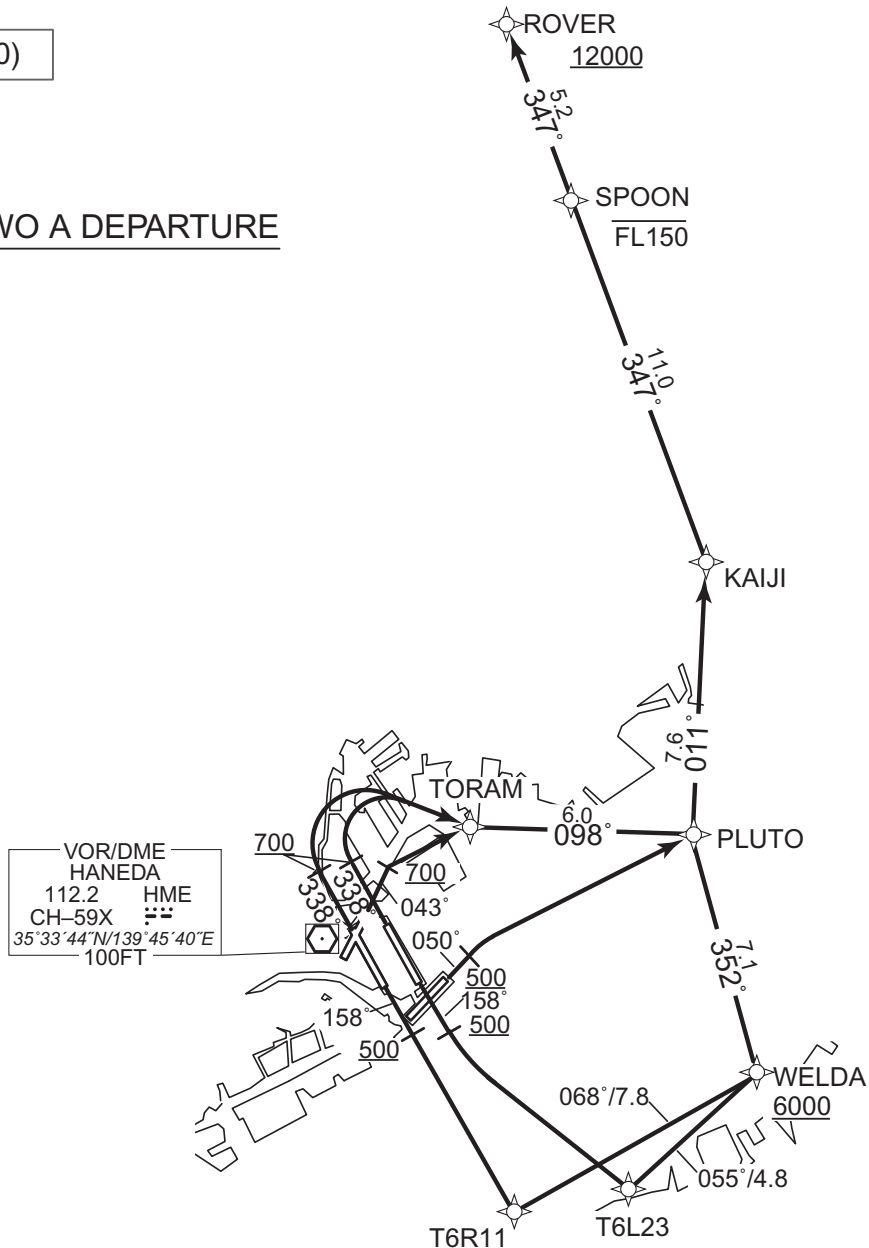

## STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO A DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,  
to WELDA at or above 6000FT, to PLUTO, to KAIJI,  
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23,  
to WELDA at or above 6000FT, to PLUTO, to KAIJI,  
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to  
TORAM, to PLUTO, to KAIJI, to SPOON at or below FL150,  
to ROVER at or above 12000FT.

RWY04 : Climb on HDG 043° at or above 700FT, direct to TORAM, to PLUTO,  
to KAIJI, to SPOON at or below FL150, to ROVER at or above  
12000FT.

RWY05 : Climb on HDG 050° at or above 500FT, turn right direct to PLUTO,  
to KAIJI, to SPOON at or below FL150, to ROVER at or above  
12000FT.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.  
RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. HDG after DEP FM RWY04.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO A DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6R11	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	WELDA	-	068 (060.6)	-7.6	7.8	-	+6000	-	-	RNAV1
004	TF	PLUTO	-	352 (344.5)	-7.6	7.1	-	-	-	-	RNAV1
005	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
006	TF	SPOON	-	347 (339.2)	-7.6	11.0	-	-FL150	-	-	RNAV1
007	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6L23	-	-	-7.6	-	L	-	-	-	RNAV1
003	TF	WELDA	-	055 (047.3)	-7.6	4.8	-	+6000	-	-	RNAV1
004	TF	PLUTO	-	352 (344.5)	-7.6	7.1	-	-	-	-	RNAV1
005	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
006	TF	SPOON	-	347 (339.2)	-7.6	11.0	-	-FL150	-	-	RNAV1
007	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TORAM	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	PLUTO	-	098 (090.7)	-7.6	6.0	-	-	-	-	RNAV1
004	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
005	TF	SPOON	-	347 (339.2)	-7.6	11.0	-	-FL150	-	-	RNAV1
006	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

CHANGE : PROC renamed. Magnetic Variation.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	043 (034.9)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TORAM	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	PLUTO	-	098 (090.7)	-7.6	6.0	-	-	-	-	RNAV1
004	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
005	TF	SPOON	-	347 (339.2)	-7.6	11.0	-	-FL150	-	-	RNAV1
006	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	PLUTO	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
004	TF	SPOON	-	347 (339.2)	-7.6	11.0	-	-FL150	-	-	RNAV1
005	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
KAIJI	354409.6N / 1395806.6E	T6L23	352627.6N / 1395539.1E
PLUTO	353632.1N / 1395736.8E	T6R11	352552.5N / 1395137.2E
ROVER	355918.3N / 1395059.3E	TORAM	353636.8N / 1395011.0E
SPOON	355428.3N / 1395316.0E	WELDA	352941.4N / 1395956.7E

CHANGE : Magnetic Variation. RWY04:NR001(Course).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO B DEPARTURE

RNAV1

Note 1) DME/DME/IRU or GNSS required.  
 ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling.  
 2) RADAR service required.

DME GAP  
 RWY16R : DER - 1.2NM FM DER  
 RWY16L : DER - 1.0NM FM DER  
 RWY34R : DER - 1.0NM FM DER

Critical DME


RWY16R : HME 1.2NM FM DER - 1.9NM to T6R11  
 PQD 6.6NM to KAIJI - KAIJI  
 RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23  
 PQD 6.6NM to KAIJI - KAIJI  
 RWY05 : HME DER - 2.2NM to PLUTO  
 PQD 6.6NM to KAIJI - KAIJI

Inappropriate Nav aids  
 See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1

VAR8°W(2020)

ROVER TWO B DEPARTURE

VOR/DME  
 HANEDA  
 112.2 HME  
 CH-59X  
 35°33'44"N/139°45'40"E  
 100FT

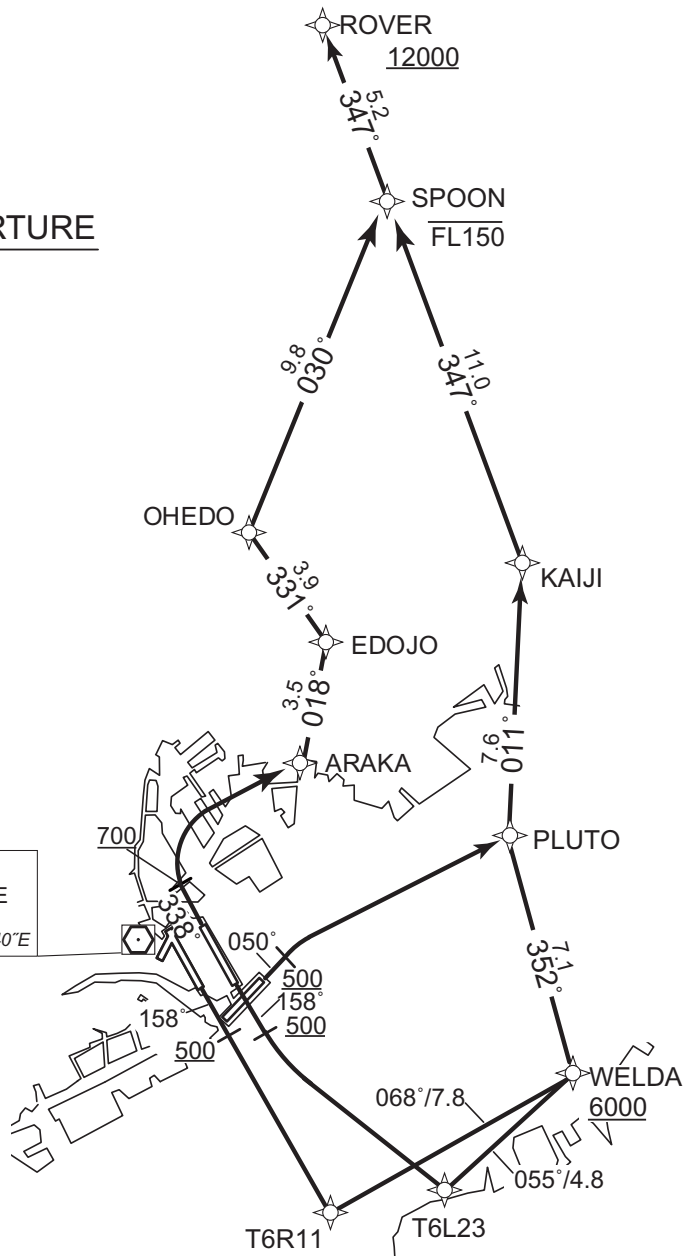

CHANGE : PROC renamed.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO B DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,  
to WELDA at or above 6000FT, to PLUTO, to KAIJI,  
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23,  
to WELDA at or above 6000FT, to PLUTO, to KAIJI,  
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA,  
to EDOJO, to OHEDO, to SPOON at or below FL150, to ROVER  
at or above 12000FT.

RWY05 : Climb on HDG 050° at or above 500FT, turn right direct to PLUTO,  
to KAIJI, to SPOON at or below FL150, to ROVER at or above  
12000FT.

Note RWY34R : 5.0% climb gradient required up to 700FT.  
RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO B DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6R11	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	WELDA	-	068 (060.6)	-7.6	7.8	-	+6000	-	-	RNAV1
004	TF	PLUTO	-	352 (344.5)	-7.6	7.1	-	-	-	-	RNAV1
005	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
006	TF	SPOON	-	347 (339.2)	-7.6	11.0	-	-FL150	-	-	RNAV1
007	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6L23	-	-	-7.6	-	L	-	-	-	RNAV1
003	TF	WELDA	-	055 (047.3)	-7.6	4.8	-	+6000	-	-	RNAV1
004	TF	PLUTO	-	352 (344.5)	-7.6	7.1	-	-	-	-	RNAV1
005	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
006	TF	SPOON	-	347 (339.2)	-7.6	11.0	-	-FL150	-	-	RNAV1
007	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.6	-	-	+700	-	-	RNAV1
002	DF	ARAKA	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	EDOJO	-	018 (010.8)	-7.6	3.5	-	-	-	-	RNAV1
004	TF	OHEDO	-	331 (323.7)	-7.6	3.9	-	-	-	-	RNAV1
005	TF	SPOON	-	030 (022.4)	-7.6	9.8	-	-FL150	-	-	RNAV1
006	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(^T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	PLUTO	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
004	TF	SPOON	-	347 (339.2)	-7.6	11.0	-	-FL150	-	-	RNAV1
005	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	ROVER	355918.3N / 1395059.3E
EDOJO	354214.0N / 1395129.9E	SPOON	355428.3N / 1395316.0E
KAIJI	354409.6N / 1395806.6E	T6L23	352627.6N / 1395539.1E
OHEDO	354523.4N / 1394838.6E	T6R11	352552.5N / 1395137.2E
PLUTO	353632.1N / 1395736.8E	WELDA	352941.4N / 1395956.7E


CHANGE : Magnetic Variation.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO C DEPARTURE		RNAV SID
Note 1) DME/DME/IRU or GNSS required. ※ The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		RWY16R : HME 1.2NM FM DER - 1.9NM to T6R11 PQD 6.6NM to KAIJI - KAIJI  RWY05 : HME DER - 2.2NM to PLUTO PQD 6.6NM to KAIJI - KAIJI
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 1.0NM FM DER	
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

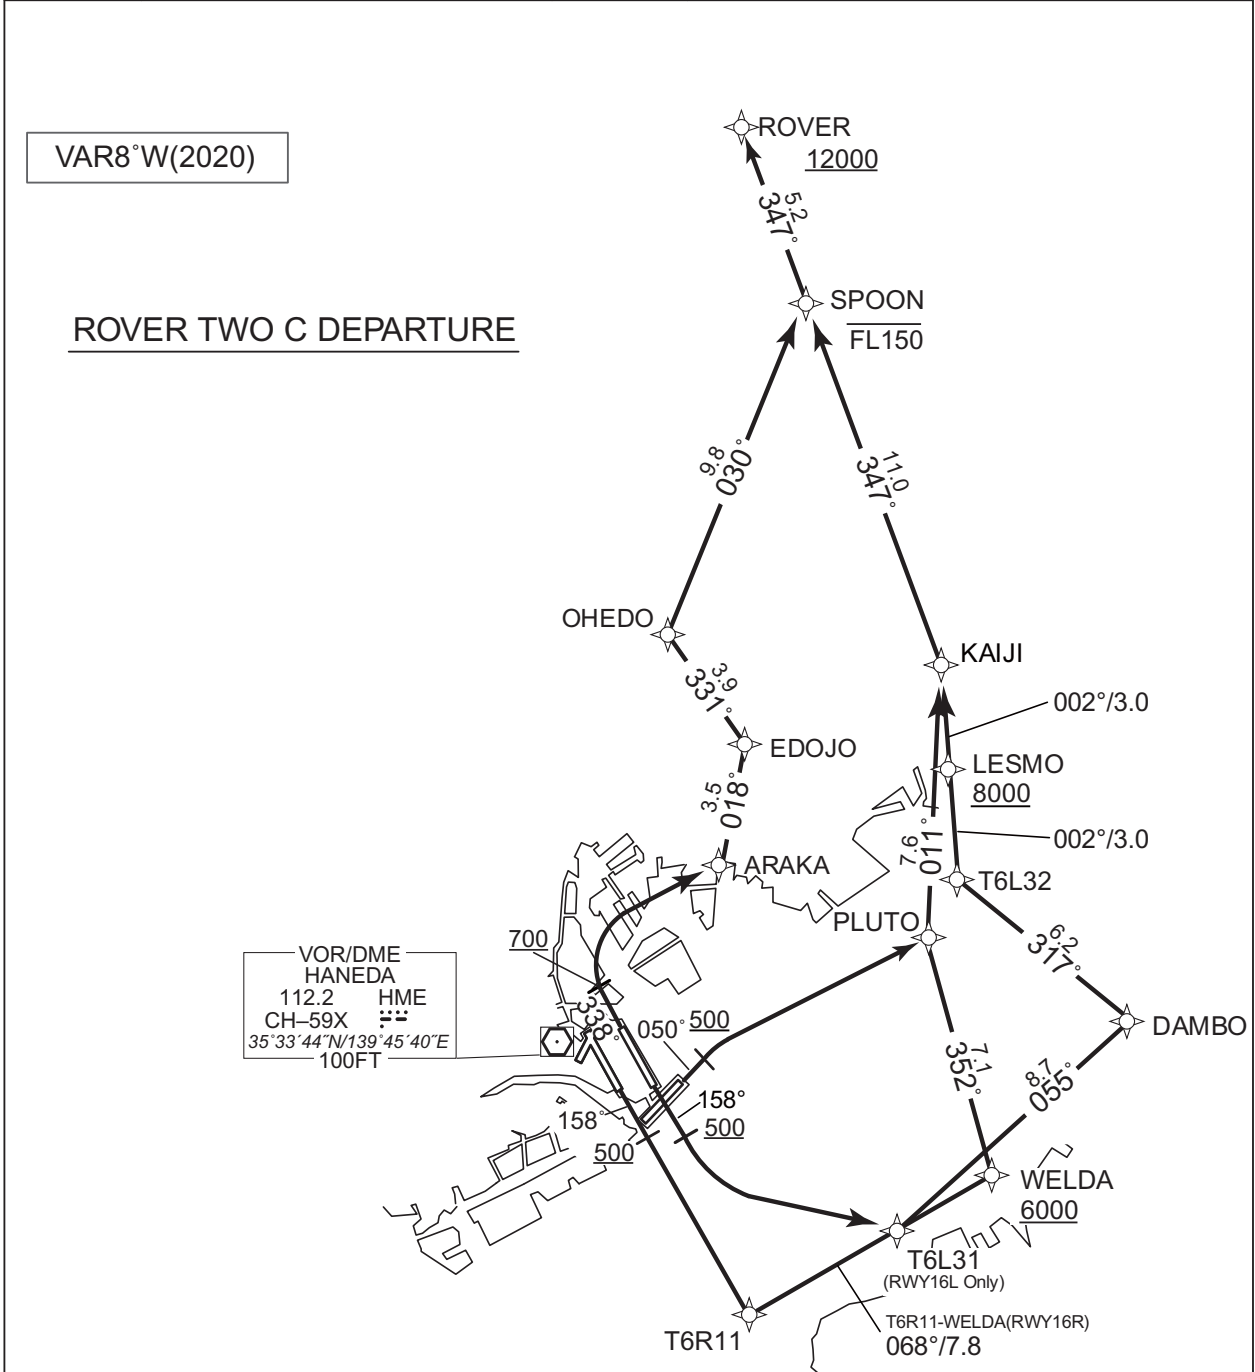

CHANGE : PROC renamed.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO C DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,  
to WELDA at or above 6000FT, to PLUTO, to KAIJI,  
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L31,  
to DAMBO, to T6L32, to LESMO at or above 8000FT, to KAIJI,  
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA,  
to EDOJO, to OHEDO, to SPOON at or below FL150, to ROVER  
at or above 12000FT.

RWY05 : Climb on HDG 050° at or above 500FT, turn right direct to PLUTO,  
to KAIJI, to SPOON at or below FL150, to ROVER at or above  
12000FT.

Note RWY34R : 5.0% climb gradient required up to 700FT.  
RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO C DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6R11	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	WELDA	-	068 (060.6)	-7.6	7.8	-	+6000	-	-	RNAV1
004	TF	PLUTO	-	352 (344.5)	-7.6	7.1	-	-	-	-	RNAV1
005	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
006	TF	SPOON	-	347 (339.2)	-7.6	11.0	-	-FL150	-	-	RNAV1
007	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6L31	-	-	-7.6	-	L	-	-	-	RNAV1
003	TF	DAMBO	-	055 (047.5)	-7.6	8.7	-	-	-	-	RNAV1
004	TF	T6L32	-	317 (309.4)	-7.6	6.2	-	-	-	-	RNAV1
005	TF	LESMO	-	002 (354.1)	-7.6	3.0	-	+8000	-	-	RNAV1
006	TF	KAIJI	-	002 (354.1)	-7.6	3.0	-	-	-	-	RNAV1
007	TF	SPOON	-	347 (339.2)	-7.6	11.0	-	-FL150	-	-	RNAV1
008	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.6	-	-	+700	-	-	RNAV1
002	DF	ARAKA	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	EDOJO	-	018 (010.8)	-7.6	3.5	-	-	-	-	RNAV1
004	TF	OHEDO	-	331 (323.7)	-7.6	3.9	-	-	-	-	RNAV1
005	TF	SPOON	-	030 (022.4)	-7.6	9.8	-	-FL150	-	-	RNAV1
006	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(^T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	PLUTO	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	KAIJI	-	011 (003.0)	-7.6	7.6	-	-	-	-	RNAV1
004	TF	SPOON	-	347 (339.2)	-7.6	11.0	-	-FL150	-	-	RNAV1
005	TF	ROVER	-	347 (339.1)	-7.6	5.2	-	+12000	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	ROVER	355918.3N / 1395059.3E
DAMBO	353416.5N / 1400443.4E	SPOON	355428.3N / 1395316.0E
EDOJO	354214.0N / 1395129.9E	T6L31	352822.8N / 1395648.0E
KAIJI	354409.6N / 1395806.6E	T6L32	353810.9N / 1395852.2E
LESMO	354110.3N / 1395829.4E	T6R11	352552.5N / 1395137.2E
OHEDO	354523.4N / 1394838.6E	WELDA	352941.4N / 1395956.7E
PLUTO	353632.1N / 1395736.8E		


CHANGE : Magnetic Variation.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL RNAV TRANSITION

AKAGI TRANSITION / BRUCE TRANSITION/ INUBO TRANSITION		RNAV1	
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.		Critical DME	-
DME GAP	-		
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1		

VAR8°W(2019)

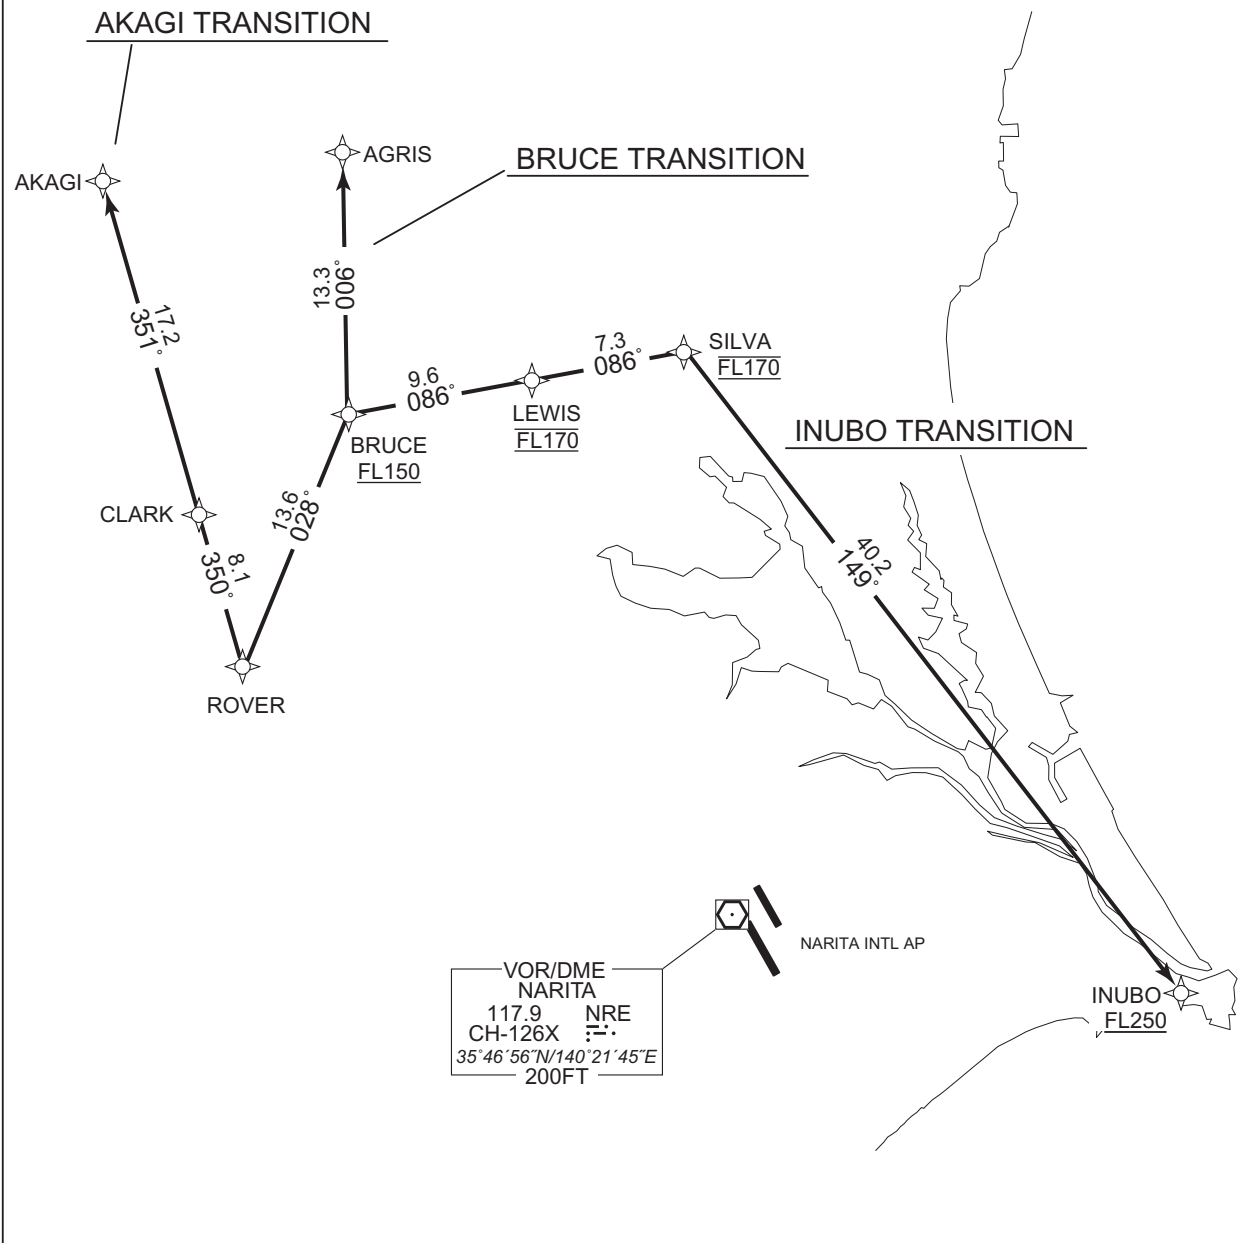

CHANGE : HOKUSO VOR/DME(HKE) abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV TRANSITION

AKAGI TRANSITION

From ROVER, to CLARK, to AKAGI.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ROVER	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CLARK	-	350 (342.7)	-7.5	8.1	-	-	-	-	RNAV1
003	TF	AKAGI	-	351 (343.4)	-7.5	17.2	-	-	-	-	RNAV1

BRUCE TRANSITION

From ROVER, to BRUCE at or above FL150, to AGRIS.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ROVER	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	BRUCE	-	028 (020.7)	-7.5	13.6	-	+FL150	-	-	RNAV1
003	TF	AGRIS	-	006 (358.7)	-7.5	13.3	-	-	-	-	RNAV1

INUBO TRANSITION

From ROVER, to BRUCE at or above FL150, to LEWIS at FL170, to SILVA at FL170, to INUBO at or above FL250.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ROVER	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	BRUCE	-	028 (020.7)	-7.5	13.6	-	+FL150	-	-	RNAV1
003	TF	LEWIS	-	086 (078.6)	-7.5	9.6	-	FL170	-	-	RNAV1
004	TF	SILVA	-	086 (078.8)	-7.5	7.3	-	FL170	-	-	RNAV1
005	TF	INUBO	-	149 (141.9)	-7.5	40.2	-	+FL250	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AGRIS	362514.7N / 1395633.1E	INUBO	354335.3N / 1404757.9E
AKAGI	362328.3N / 1394156.3E	LEWIS	361353.2N / 1400834.7E
BRUCE	361200.4N / 1395655.9E	ROVER	355918.3N / 1395059.3E
CLARK	360702.0N / 1394800.5E	SILVA	361518.0N / 1401726.0E

CHANGE : ALT Restriction on BRUCE




STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL RNAV SID

RUTAS TWO DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		RWY16R : HME 1.2NM FM DER - 1.9NM to T6R11 RWY16L : HME 1.0NM FM DER - 2.4NM to T6L21 RWY34R : HME 1.0NM FM DER - 2.5NM to TT502 RWY34L : HME 0.5NM FM DER - 2.5NM to TT502 RWY04 : HME 1.7NM FM DER - 2.5NM to TT502 RWY05 : HME DER - 2.7NM to TT502
DME GAP	RWY16R:DER - 1.2NM FM DER RWY16L:DER - 1.0NM FM DER RWY34R:DER - 1.0NM FM DER RWY34L:DER - 0.5NM FM DER RWY04:DER - 1.7NM FM DER	
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1	

VAR8°W(2020)

VOR/DME  
HANEDA  
112.2 HME  
CH-59X  
35°33'44"N/139°45'40"E  
100FT

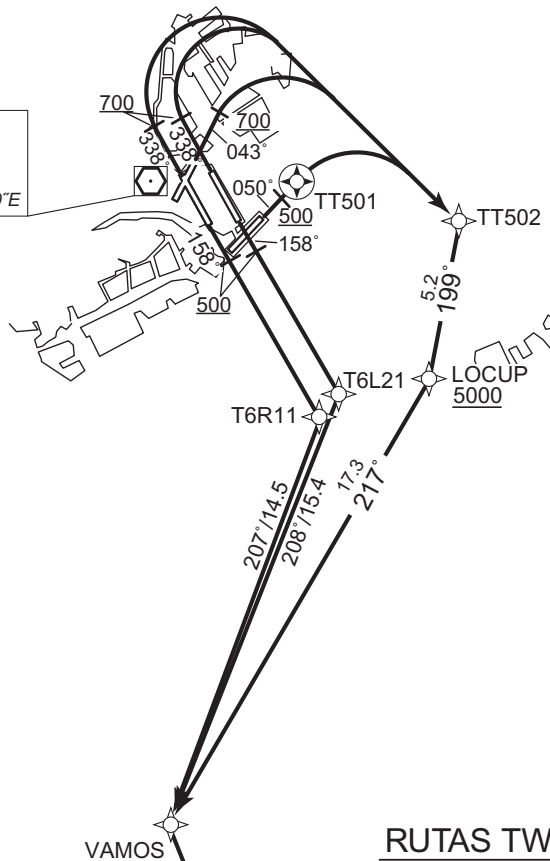

RUTAS TWO DEPARTURE

CHANGE : PROC renamed. VAR. HDG after DEP FM RWY04. Course FM TT502 to LOCUP.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RUTAS TWO DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11, to VAMOS, to UTIBO at 6000FT, to RUTAS.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L21, to VAMOS, to UTIBO at 6000FT, to RUTAS.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to VAMOS, to UTIBO at 6000FT, to RUTAS.

RWY04: Climb on HDG 043° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to VAMOS, to UTIBO at 6000FT, to RUTAS.

RWY05: Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to VAMOS, to UTIBO at 6000FT, to RUTAS.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.  
RWY05 : 5.0% climb gradient required up to 500FT.

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6R11	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	VAMOS	-	207 (199.5)	-7.6	14.5	-	-	-	-	RNAV1
004	TF	UTIBO	-	165 (157.0)	-7.6	16.8	-	6000	-	-	RNAV1
005	TF	RUTAS	-	116 (108.4)	-7.6	40.6	-	-	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.6	-	-	+500	-	-	RNAV1
002	DF	T6L21	-	-	-7.6	-	-	-	-	-	RNAV1
003	TF	VAMOS	-	208 (200.7)	-7.6	15.4	-	-	-	-	RNAV1
004	TF	UTIBO	-	165 (157.0)	-7.6	16.8	-	6000	-	-	RNAV1
005	TF	RUTAS	-	116 (108.4)	-7.6	40.6	-	-	-	-	RNAV1

CHANGE : PROC renamed. Magnetic Variation. HDG after DEP FM RWY04.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
004	TF	VAMOS	-	217 (209.5)	-7.6	17.3	-	-	-	-	RNAV1
005	TF	UTIBO	-	165 (157.0)	-7.6	16.8	-	6000	-	-	RNAV1
006	TF	RUTAS	-	116 (108.4)	-7.6	40.6	-	-	-	-	RNAV1

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	043 (034.9)	-7.6	-	-	+700	-	-	RNAV1
002	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
003	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
004	TF	VAMOS	-	217 (209.5)	-7.6	17.3	-	-	-	-	RNAV1
005	TF	UTIBO	-	165 (157.0)	-7.6	16.8	-	6000	-	-	RNAV1
006	TF	RUTAS	-	116 (108.4)	-7.6	40.6	-	-	-	-	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.6	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
005	TF	VAMOS	-	217 (209.5)	-7.6	17.3	-	-	-	-	RNAV1
006	TF	UTIBO	-	165 (157.0)	-7.6	16.8	-	6000	-	-	RNAV1
007	TF	RUTAS	-	116 (108.4)	-7.6	40.6	-	-	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
LOCUP	352718.8N / 1395608.5E	TT501	353328.7N / 1395029.9E
RUTAS	344349.3N / 1404034.2E	TT502	353224.4N / 1395720.7E
T6L21	352639.1N / 1395222.0E	UTIBO	345647.0N / 1395343.9E
T6R11	352552.5N / 1395137.2E	VAMOS	351215.5N / 1394543.6E

CHANGE : Magnetic Variation. RWY34L/RWY34R:NR003(Course). RWY04:NR001,003(Course). RWY05:NR004(Course).

STANDARD DEPARTURE CHART-INSTRUMENT


RJTT/TOKYO INTL

RNAV SID

GUSRO ONE DEPARTURE		RNAV1
<p>Note 1) DME/DME/IRU or GNSS required.                      ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling.                      2) RADAR service required.</p>		<p>RWY16R : HME 1.2NM FM DER – HATBA                      HYD 2.8NM to HATBA - 1.6NM to HATBA                      PQD HATBA - 1.6NM to KAMAT</p> <p>RWY16L : HME 1.0NM FM DER - HATBA                      HYD 2.8NM to HATBA - 1.6NM to HATBA                      PQD HATBA - 1.6NM to KAMAT</p> <p>RWY34R : HME 1.0NM FM DER - 2.5NM to TT502                      TT503 – 3.8NM to KAMAT                      1.8NM to KAMAT - KAMAT                      HYD 1.2NM to TT503 – TT503                      4.8NM to KAMAT – 3.8NM to KAMAT</p> <p>RWY34L : HME 0.5NM FM DER - 2.5NM to TT502                      TT503 – 3.8NM to KAMAT                      1.8NM to KAMAT - KAMAT                      HYD 1.2NM to TT503 – TT503                      4.8NM to KAMAT – 3.8NM to KAMAT</p> <p>RWY04 : HME 1.7NM FM DER - 2.5NM to TT502                      TT503 – 3.8NM to KAMAT                      1.8NM to KAMAT – KAMAT                      HYD 1.2NM to TT503 – TT503                      4.8NM to KAMAT – 3.8NM to KAMAT</p> <p>RWY05 : HME DER - 2.7NM to TT502                      TT503 - 3.8NM to KAMAT                      1.8NM to KAMAT - KAMAT                      HYD 1.2NM to TT503 - TT503                      4.8NM to KAMAT - 3.8NM to KAMAT</p>
DME GAP	<p>RWY16R : DER - 1.2NM FM DER                      RWY16L : DER - 1.0NM FM DER                      RWY34R : DER - 1.0NM FM DER                      3.8NM to KAMAT – 1.8NM to KAMAT                      RWY34L : DER - 0.5NM FM DER                      3.8NM to KAMAT – 1.8NM to KAMAT                      RWY04 : DER - 1.7NM FM DER                      3.8NM to KAMAT – 1.8NM to KAMAT                      RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT                      RWY22 : DER – 1.4NM FM DER</p>	
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1	

VAR8°W

GUSRO ONE DEPARTURE RWY16R/16L

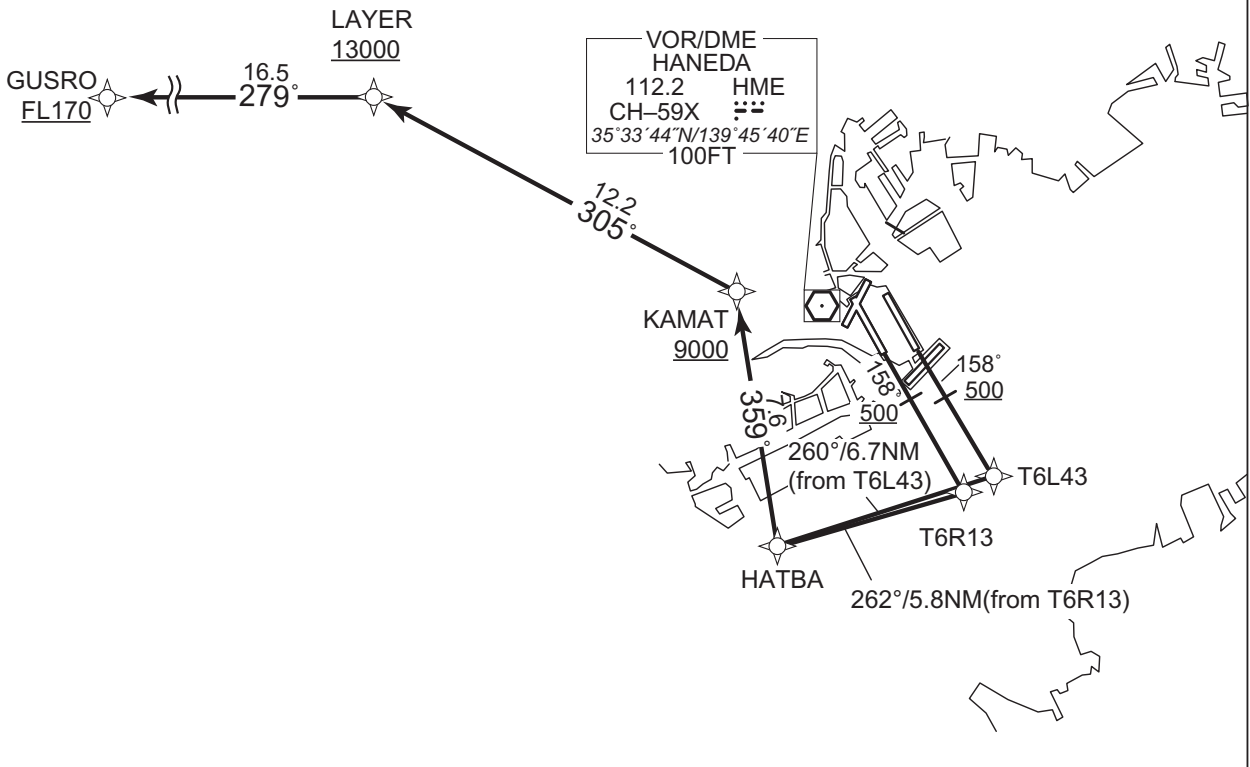


STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAR8°W

GUSRO ONE DEPARTURE RWY 34L/34R/04/05/22

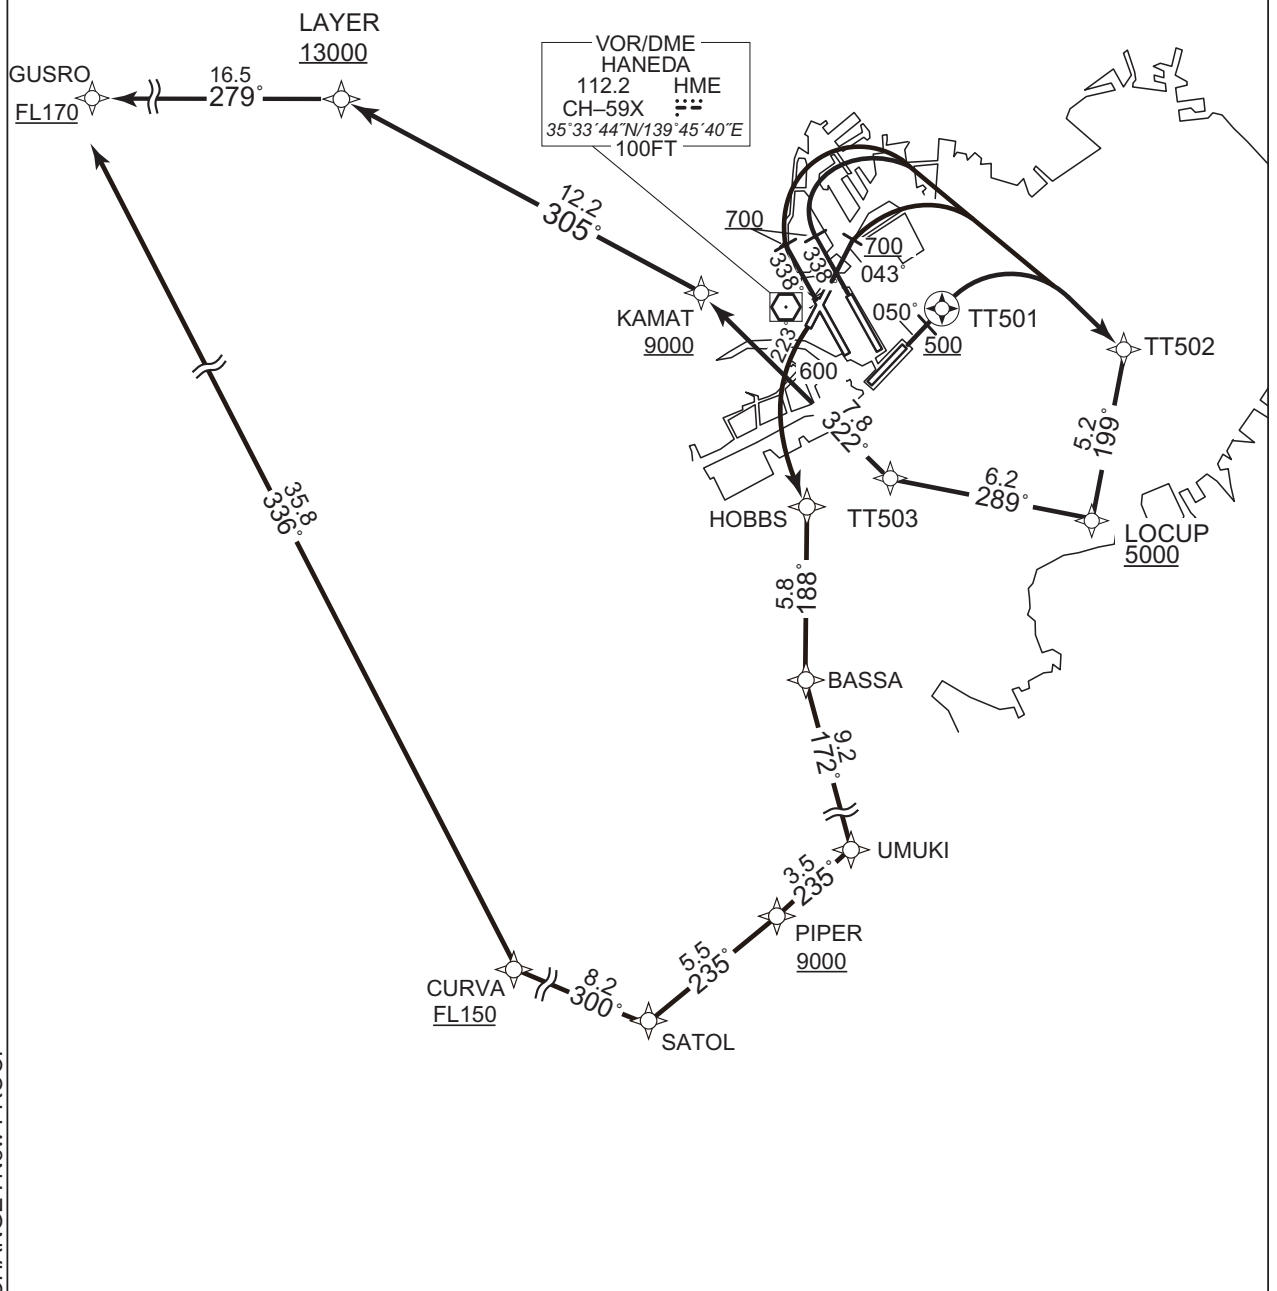

CHANGE : New PROC.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

GUSRO ONE DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13, to HATBA, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to GUSRO at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L43, to HATBA, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to GUSRO at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to GUSRO at or above FL170.

RWY04 : Climb on HDG 043° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to GUSRO at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to GUSRO at or above FL170.

RWY22 : Climb on HDG 223° at or above 600FT, turn left direct to HOBBS, to BASSA, to UMIKI, to PIPER at or above 9000FT, to SATOL, to CURVA at or above FL150, to GUSRO at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

RWY22 : 5.0% climb gradient required up to 600FT.

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

GUSRO ONE DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.8	-	-	+500	-	-	RNAV1
002	DF	T6R13	-	-	-7.8	-	-	-	-	-	RNAV1
003	TF	HATBA	-	262 (253.8)	-7.8	5.8	-	-	-	-	RNAV1
004	TF	KAMAT	-	359 (351.1)	-7.8	7.6	-	+9000	-	-	RNAV1
005	TF	LAYER	-	305 (297.1)	-7.8	12.2	-	+13000	-	-	RNAV1
006	TF	GUSRO	-	279 (271.2)	-7.8	16.5	-	+FL170	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.8	-	-	+500	-	-	RNAV1
002	DF	T6L43	-	-	-7.8	-	-	-	-	-	RNAV1
003	TF	HATBA	-	260 (251.9)	-7.8	6.7	-	-	-	-	RNAV1
004	TF	KAMAT	-	359 (351.1)	-7.8	7.6	-	+9000	-	-	RNAV1
005	TF	LAYER	-	305 (297.1)	-7.8	12.2	-	+13000	-	-	RNAV1
006	TF	GUSRO	-	279 (271.2)	-7.8	16.5	-	+FL170	-	-	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.8	-	-	+700	-	-	RNAV1
002	DF	TT502	-	-	-7.8	-	R	-	-	-	RNAV1
003	TF	LOCUP	-	199 (190.9)	-7.8	5.2	-	+5000	-	-	RNAV1
004	TF	TT503	-	289 (280.8)	-7.8	6.2	-	-	-	-	RNAV1
005	TF	KAMAT	-	322 (314.2)	-7.8	7.8	-	+9000	-	-	RNAV1
006	TF	LAYER	-	305 (297.1)	-7.8	12.2	-	+13000	-	-	RNAV1
007	TF	GUSRO	-	279 (271.2)	-7.8	16.5	-	+FL170	-	-	RNAV1

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	043 (034.9)	-7.8	-	-	+700	-	-	RNAV1
002	DF	TT502	-	-	-7.8	-	R	-	-	-	RNAV1
003	TF	LOCUP	-	199 (190.9)	-7.8	5.2	-	+5000	-	-	RNAV1
004	TF	TT503	-	289 (280.8)	-7.8	6.2	-	-	-	-	RNAV1
005	TF	KAMAT	-	322 (314.2)	-7.8	7.8	-	+9000	-	-	RNAV1
006	TF	LAYER	-	305 (297.1)	-7.8	12.2	-	+13000	-	-	RNAV1
007	TF	GUSRO	-	279 (271.2)	-7.8	16.5	-	+FL170	-	-	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.8	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.8	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.8	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.8	5.2	-	+5000	-	-	RNAV1
005	TF	TT503	-	289 (280.8)	-7.8	6.2	-	-	-	-	RNAV1
006	TF	KAMAT	-	322 (314.2)	-7.8	7.8	-	+9000	-	-	RNAV1
007	TF	LAYER	-	305 (297.1)	-7.8	12.2	-	+13000	-	-	RNAV1
008	TF	GUSRO	-	279 (271.2)	-7.8	16.5	-	+FL170	-	-	RNAV1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	223 (214.9)	-7.8	-	-	+600	-	-	RNAV1
002	DF	HOBBS	-	-	-7.8	-	L	-	-	-	RNAV1
003	TF	BASSA	-	188 (179.9)	-7.8	5.8	-	-	-	-	RNAV1
004	TF	UMUKI	-	172 (163.9)	-7.8	9.2	-	-	-	-	RNAV1
005	TF	PIPER	-	235 (227.4)	-7.8	3.5	-	+9000	-	-	RNAV1
006	TF	SATOL	-	235 (227.4)	-7.8	5.5	-	-	-	-	RNAV1
007	TF	CURVA	-	300 (292.2)	-7.8	8.2	-	+FL150	-	-	RNAV1
008	TF	GUSRO	-	336 (328.3)	-7.8	35.8	-	+FL170	-	-	RNAV1

CHANGE : New PROC.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	PIPER	350958.3N / 1394542.0E
CURVA	350919.0N / 1393124.4E	SATOL	350613.3N / 1394043.4E
GUSRO	353944.8N / 1390813.1E	T6L43	352828.4N / 1395104.6E
HATBA	352623.4N / 1394315.9E	T6R13	352800.8N / 1395006.4E
HOBBS	352653.9N / 1394541.3E	TT501	353328.7N / 1395029.9E
KAMAT	353353.6N / 1394148.9E	TT502	353224.4N / 1395720.7E
LAYER	353925.4N / 1392829.5E	TT503	352828.0N / 1394840.4E
LOCUP	352718.8N / 1395608.5E	UMUKI	351219.1N / 1394849.2E

CHANGE : New PROC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

STAR

SINGO ARRIVAL

From over STONE, via HME R036 to HME 22.2DME, via HME 22.2DME clockwise ARC to SINGO.

Cross STONE at 11000FT, cross HME R036/28.0DME at or above 8000FT.

DOYLE ARRIVAL

From over STONE, via HME R036 to HME 22.2DME, via HME 22.2DME clockwise ARC to intercept and proceed via ITL LOC course to DOYLE.

Cross STONE at 11000FT, cross HME R036/28.0DME at or above 8000FT.

ADDUM ARRIVAL

From over ADDUM, via HME R157 to HME 25.0DME, turn right, via IHA LOC course to ARLON.

Cross ADDUM at 10000FT.

BONUS ARRIVAL


From over ADDUM, via HME R157 to HME 22.2DME, via HME 22.2DME counterclockwise ARC to intercept and proceed via IKL LOC course to BONUS.

Cross ADDUM at 10000FT.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL


STAR

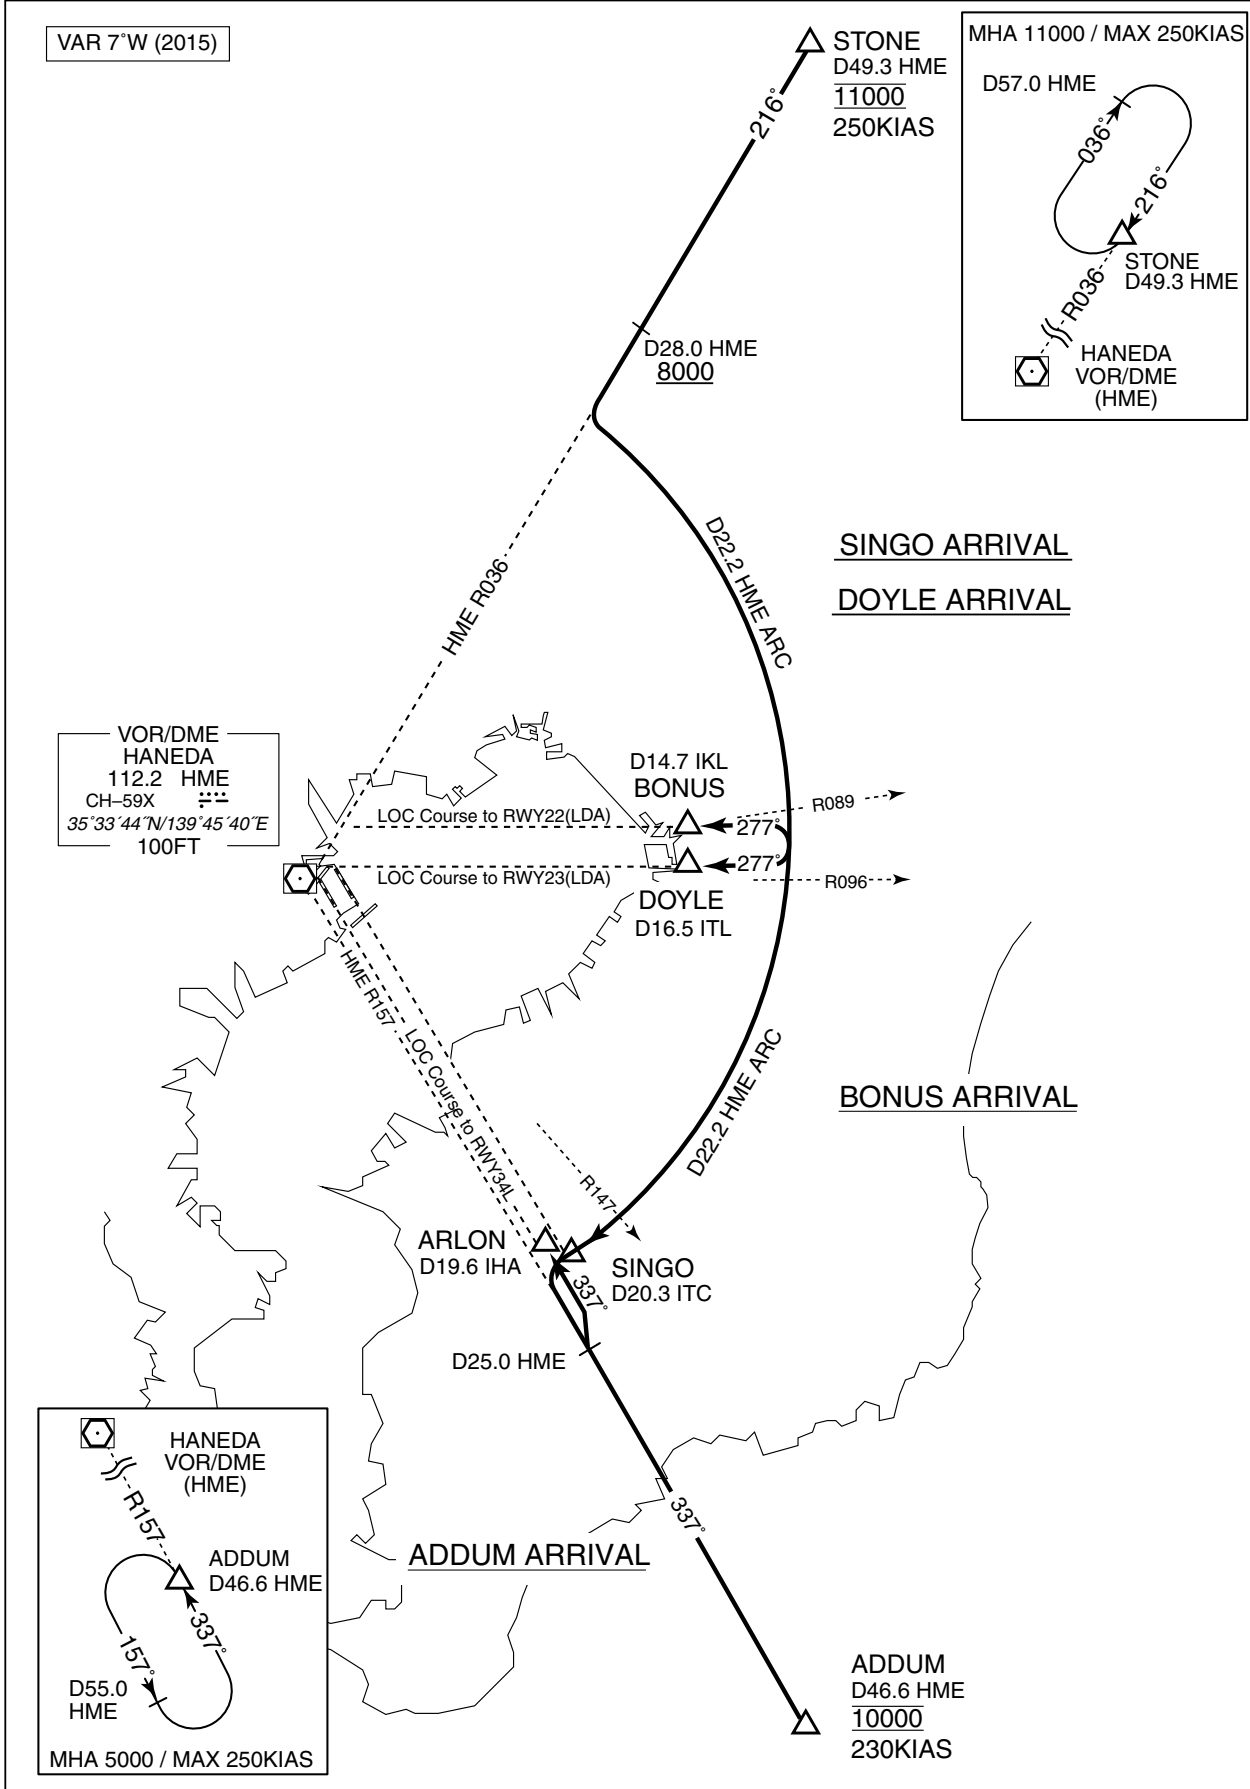

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

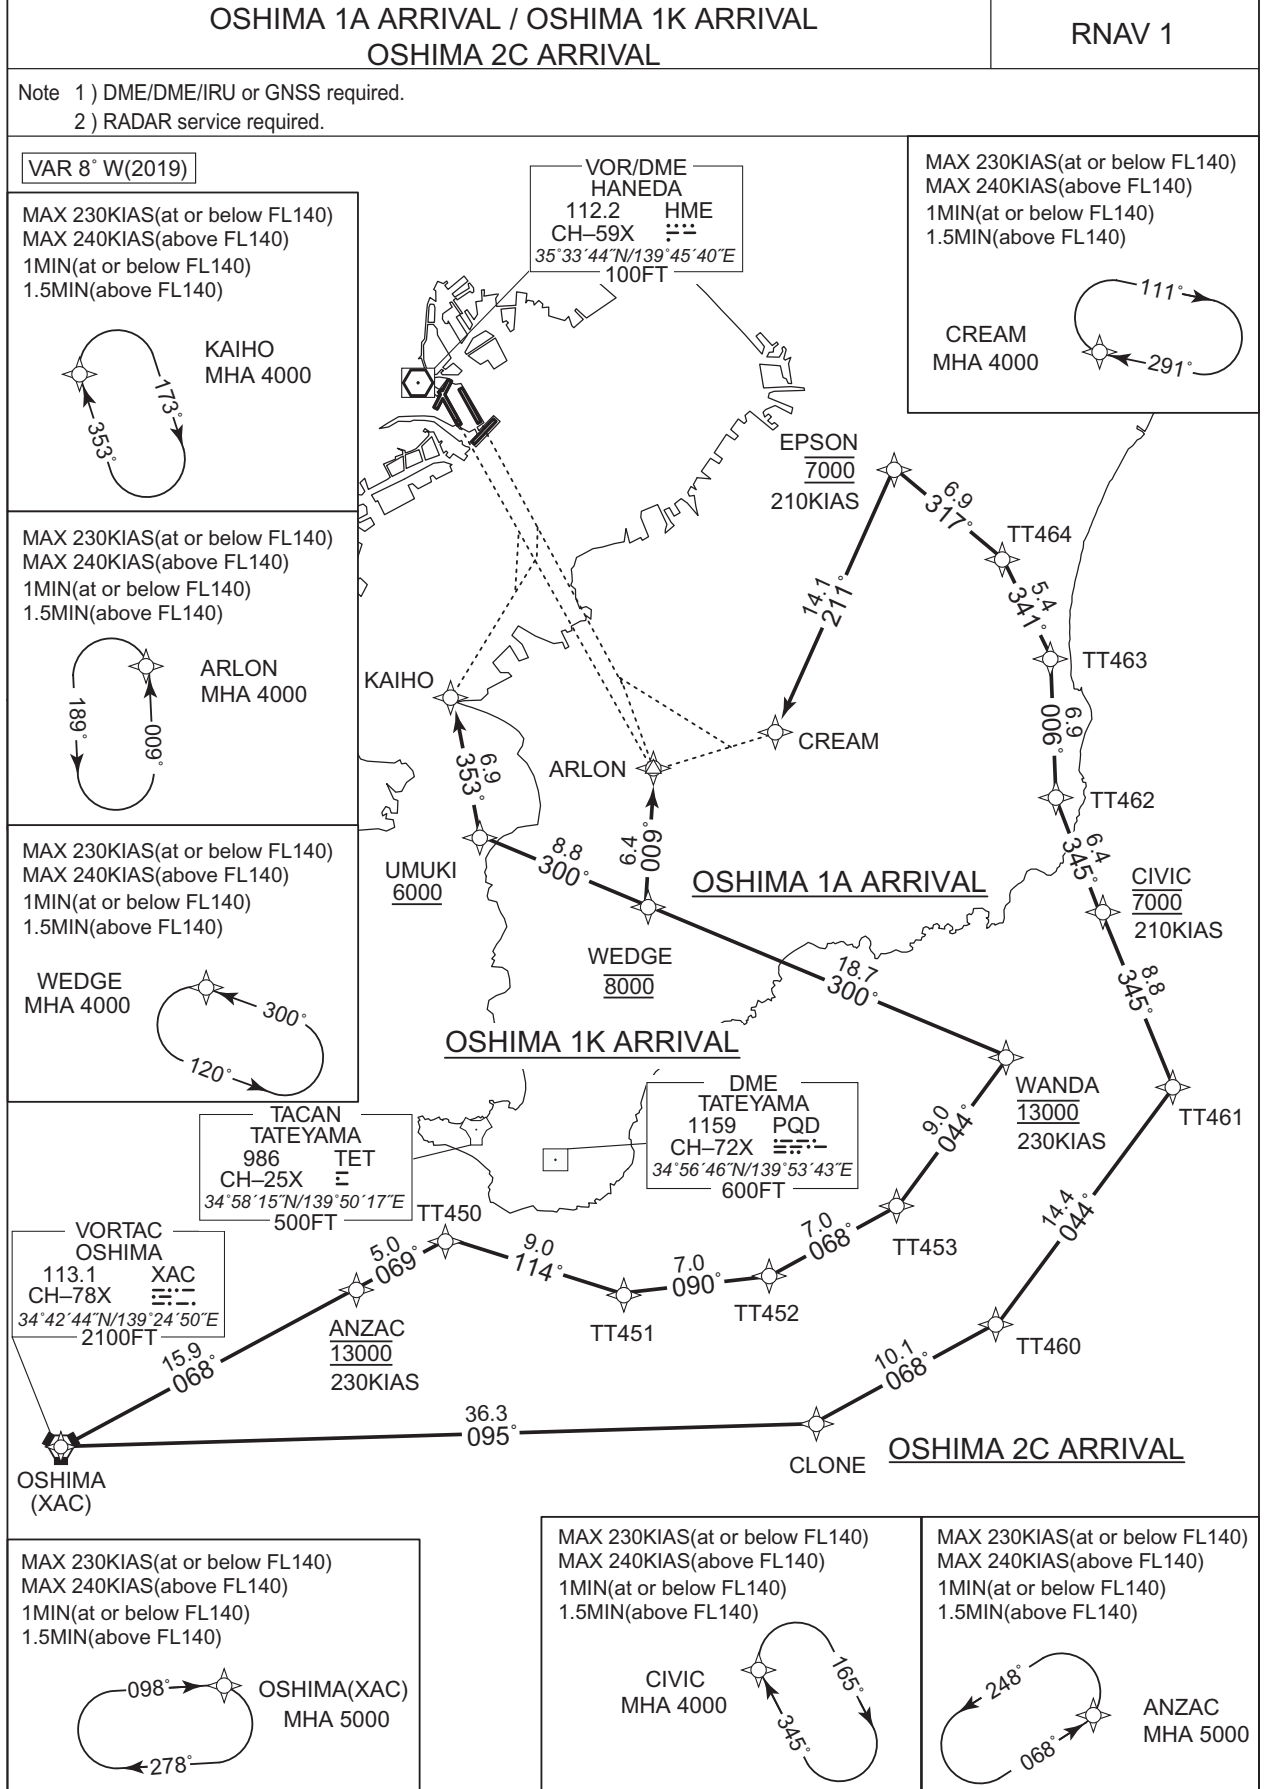

CHANGE : ACORN abolished. ANZAC established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 1A ARRIVAL

From XAC, to ANZAC at 13000FT, to TT450, to TT451, to TT452, to TT453, to WANDA at 13000FT, to WEDGE at 8000FT, to ARLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	ANZAC	-	068 (060.8)	-7.5	15.9	-	13000	230	-	RNAV1
003	TF	TT450	-	069 (061.0)	-7.5	5.0	-	-	-	-	RNAV1
004	TF	TT451	-	114 (106.9)	-7.5	9.0	-	-	-	-	RNAV1
005	TF	TT452	-	090 (082.2)	-7.5	7.0	-	-	-	-	RNAV1
006	TF	TT453	-	068 (060.7)	-7.5	7.0	-	-	-	-	RNAV1
007	TF	WANDA	-	044 (036.0)	-7.5	9.0	-	13000	230	-	RNAV1
008	TF	WEDGE	-	300 (292.4)	-7.5	18.7	-	8000	-	-	RNAV1
009	TF	ARLON	-	009 (001.6)	-7.5	6.4	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : ACORN abolished. ANZAC established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 1K ARRIVAL

From XAC, to ANZAC at 13000FT, to TT450, to TT451, to TT452, to TT453, to WANDA at 13000FT, to WEDGE at 8000FT, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	ANZAC	-	068 (060.8)	-7.5	15.9	-	13000	230	-	RNAV1
003	TF	TT450	-	069 (061.0)	-7.5	5.0	-	-	-	-	RNAV1
004	TF	TT451	-	114 (106.9)	-7.5	9.0	-	-	-	-	RNAV1
005	TF	TT452	-	090 (082.2)	-7.5	7.0	-	-	-	-	RNAV1
006	TF	TT453	-	068 (060.7)	-7.5	7.0	-	-	-	-	RNAV1
007	TF	WANDA	-	044 (036.0)	-7.5	9.0	-	13000	230	-	RNAV1
008	TF	WEDGE	-	300 (292.4)	-7.5	18.7	-	8000	-	-	RNAV1
009	TF	UMUKI	-	300 (292.2)	-7.5	8.8	-	+6000	-	-	RNAV1
010	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : ACORN abolished. ANZAC established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 2C ARRIVAL

From XAC, to CLONE, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CLONE	-	095 (087.8)	-7.5	36.3	-	-	-	-	RNAV1
003	TF	TT460	-	068 (060.7)	-7.5	10.1	-	-	-	-	RNAV1
004	TF	TT461	-	044 (036.1)	-7.5	14.4	-	-	-	-	RNAV1
005	TF	CIVIC	-	345 (337.7)	-7.5	8.8	-	7000	210	-	RNAV1
006	TF	TT462	-	345 (337.7)	-7.5	6.4	-	-	-	-	RNAV1
007	TF	TT463	-	006 (358.0)	-7.5	6.9	-	-	-	-	RNAV1
008	TF	TT464	-	341 (333.5)	-7.5	5.4	-	-	-	-	RNAV1
009	TF	EPSON	-	317 (309.0)	-7.5	6.9	-	7000	210	-	RNAV1
010	TF	CREAM	-	211 (203.6)	-7.5	14.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ANZAC	345028.8N / 1394146.7E	TT453	345438.5N / 1401325.9E
ARLON	351525.3N / 1395859.8E	TT460	344852.6N / 1401936.8E
CIVIC	350840.6N / 1402552.1E	TT461	350030.2N / 1402957.9E
CLONE	344357.8N / 1400856.0E	TT462	351433.3N / 1402254.8E
CREAM	351743.4N / 1400612.4E	TT463	352125.4N / 1402237.1E
EPSON	353036.2N / 1401305.9E	TT464	352617.6N / 1401938.6E
KAIHO	351857.8N / 1394642.4E	UMUKI	351219.1N / 1394849.2E
TT450	345254.0N / 1394706.0E	WANDA	350155.3N / 1401954.1E
TT451	345016.8N / 1395734.3E	WEDGE	350900.4N / 1395846.5E
TT452	345113.2N / 1400600.1E	XAC	344244.1N / 1392450.5E

CHANGE : ACORN abolished. ANZAC established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

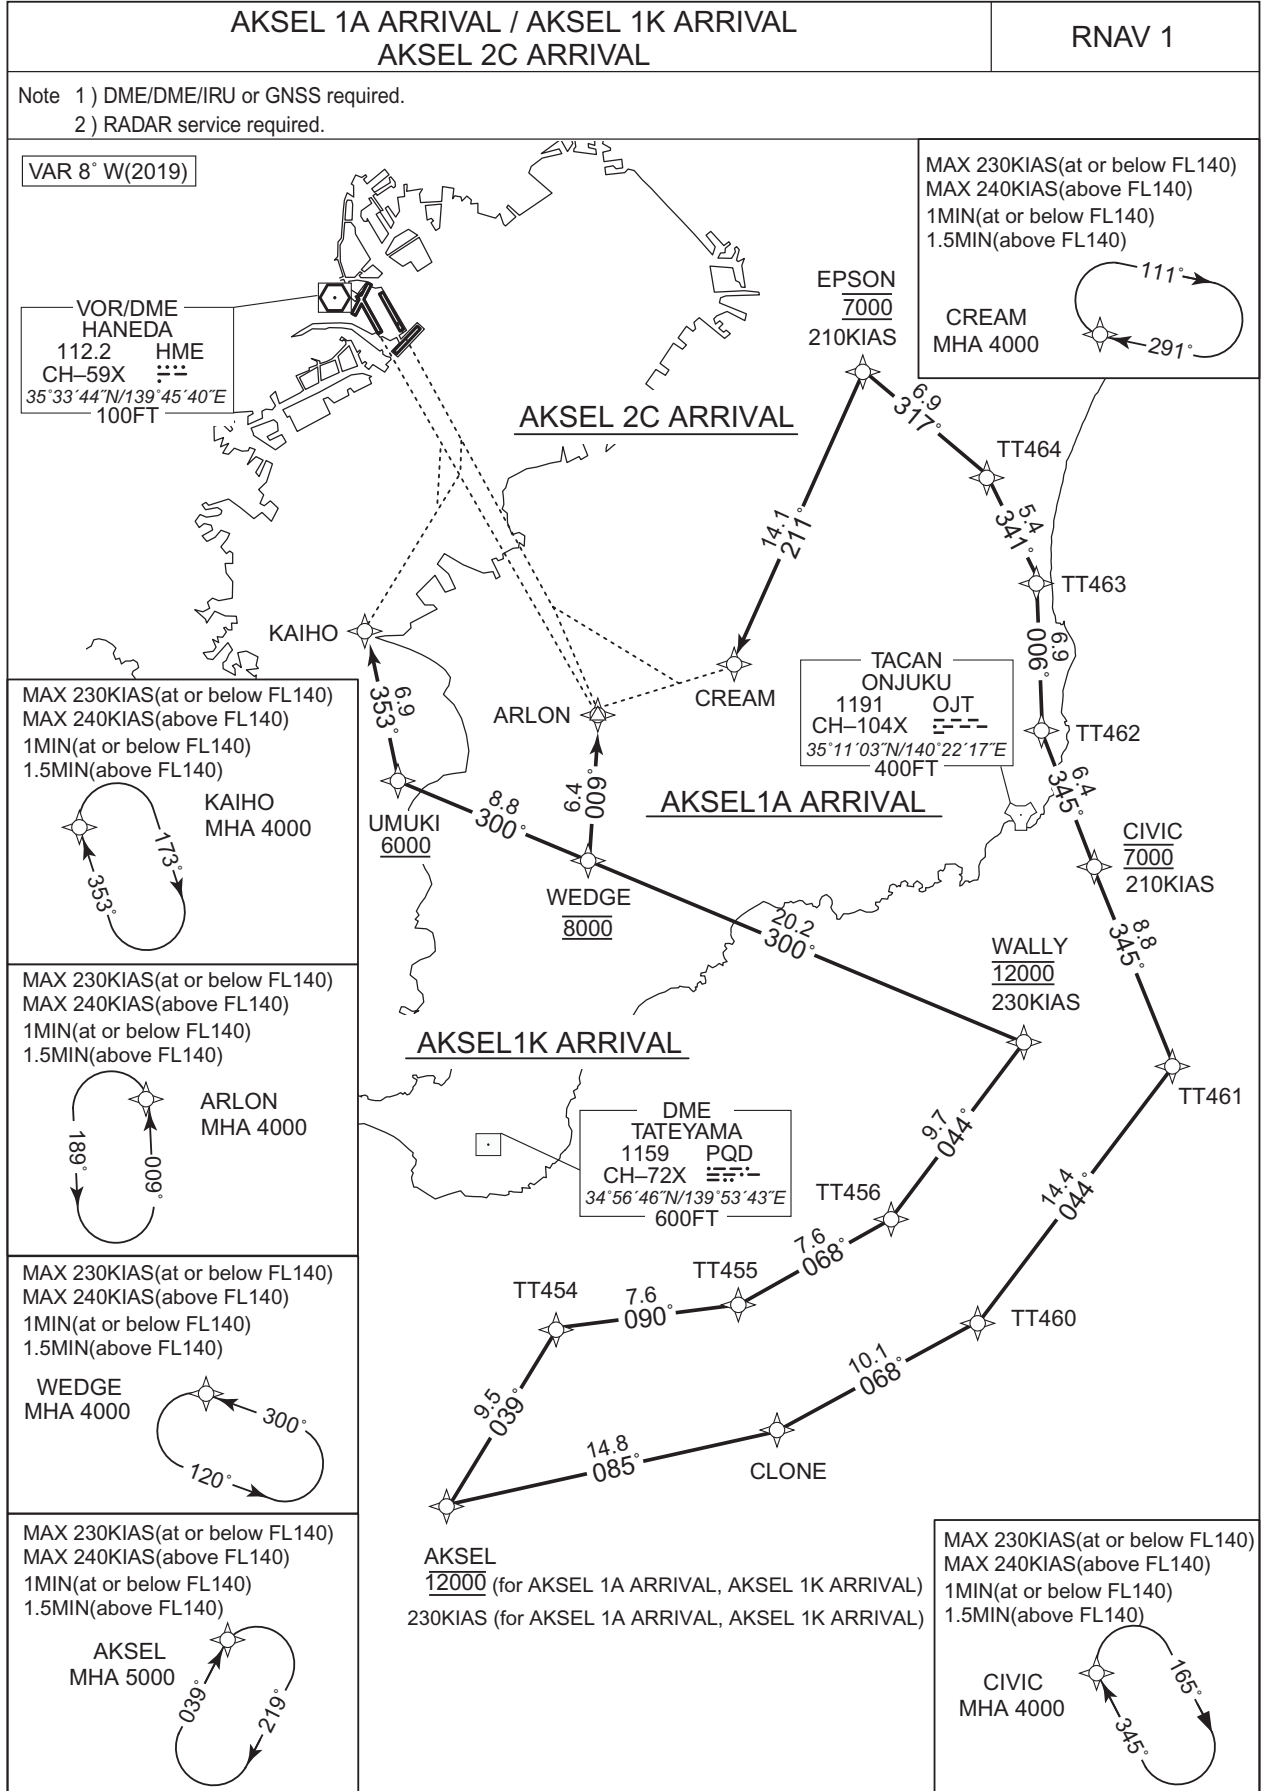

CHANGE : WALLY renamed



STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AKSEL 1A ARRIVAL

From AKSEL at 12000FT, to TT454, to TT455, to TT456, to WALLY at 12000FT, to WEDGE at 8000FT, to ARLON.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	12000	230	-	RNAV1
002	TF	TT454	-	039 (031.2)	-7.5	9.5	-	-	-	-	RNAV1
003	TF	TT455	-	090 (082.2)	-7.5	7.6	-	-	-	-	RNAV1
004	TF	TT456	-	068 (060.7)	-7.5	7.6	-	-	-	-	RNAV1
005	TF	WALLY	-	044 (036.0)	-7.5	9.7	-	12000	230	-	RNAV1
006	TF	WEDGE	-	300 (292.4)	-7.5	20.2	-	8000	-	-	RNAV1
007	TF	ARLON	-	009 (001.6)	-7.5	6.4	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : WALLY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AKSEL 1K ARRIVAL

From AKSEL at 12000FT, to TT454, to TT455, to TT456, to WALLY at 12000FT, to WEDGE at 8000FT, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	12000	230	-	RNAV1
002	TF	TT454	-	039 (031.2)	-7.5	9.5	-	-	-	-	RNAV1
003	TF	TT455	-	090 (082.2)	-7.5	7.6	-	-	-	-	RNAV1
004	TF	TT456	-	068 (060.7)	-7.5	7.6	-	-	-	-	RNAV1
005	TF	WALLY	-	044 (036.0)	-7.5	9.7	-	12000	230	-	RNAV1
006	TF	WEDGE	-	300 (292.4)	-7.5	20.2	-	8000	-	-	RNAV1
007	TF	UMUKI	-	300 (292.2)	-7.5	8.8	-	+6000	-	-	RNAV1
008	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : WALLY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AKSEL 2C ARRIVAL

From AKSEL, to CLONE, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CLONE	-	085 (077.0)	-7.5	14.8	-	-	-	-	RNAV1
003	TF	TT460	-	068 (060.7)	-7.5	10.1	-	-	-	-	RNAV1
004	TF	TT461	-	044 (036.1)	-7.5	14.4	-	-	-	-	RNAV1
005	TF	CIVIC	-	345 (337.7)	-7.5	8.8	-	7000	210	-	RNAV1
006	TF	TT462	-	345 (337.7)	-7.5	6.4	-	-	-	-	RNAV1
007	TF	TT463	-	006 (358.0)	-7.5	6.9	-	-	-	-	RNAV1
008	TF	TT464	-	341 (333.5)	-7.5	5.4	-	-	-	-	RNAV1
009	TF	EPSON	-	317 (309.0)	-7.5	6.9	-	7000	210	-	RNAV1
010	TF	CREAM	-	211 (203.6)	-7.5	14.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	TT456	345329.3N / 1401440.2E
ARLON	351525.3N / 1395859.8E	TT460	344852.6N / 1401936.8E
CIVIC	350840.6N / 1402552.1E	TT461	350030.2N / 1402957.9E
CLONE	344357.8N / 1400856.0E	TT462	351433.3N / 1402254.8E
CREAM	351743.4N / 1400612.4E	TT463	352125.4N / 1402237.1E
EPSON	353036.2N / 1401305.9E	TT464	352617.6N / 1401938.6E
KAIHO	351857.8N / 1394642.4E	UMUKI	351219.1N / 1394849.2E
TT454	344844.8N / 1395725.3E	WALLY	350120.1N / 1402138.6E
TT455	344946.2N / 1400635.3E	WEDGE	350900.4N / 1395846.5E

CHANGE : WALLY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

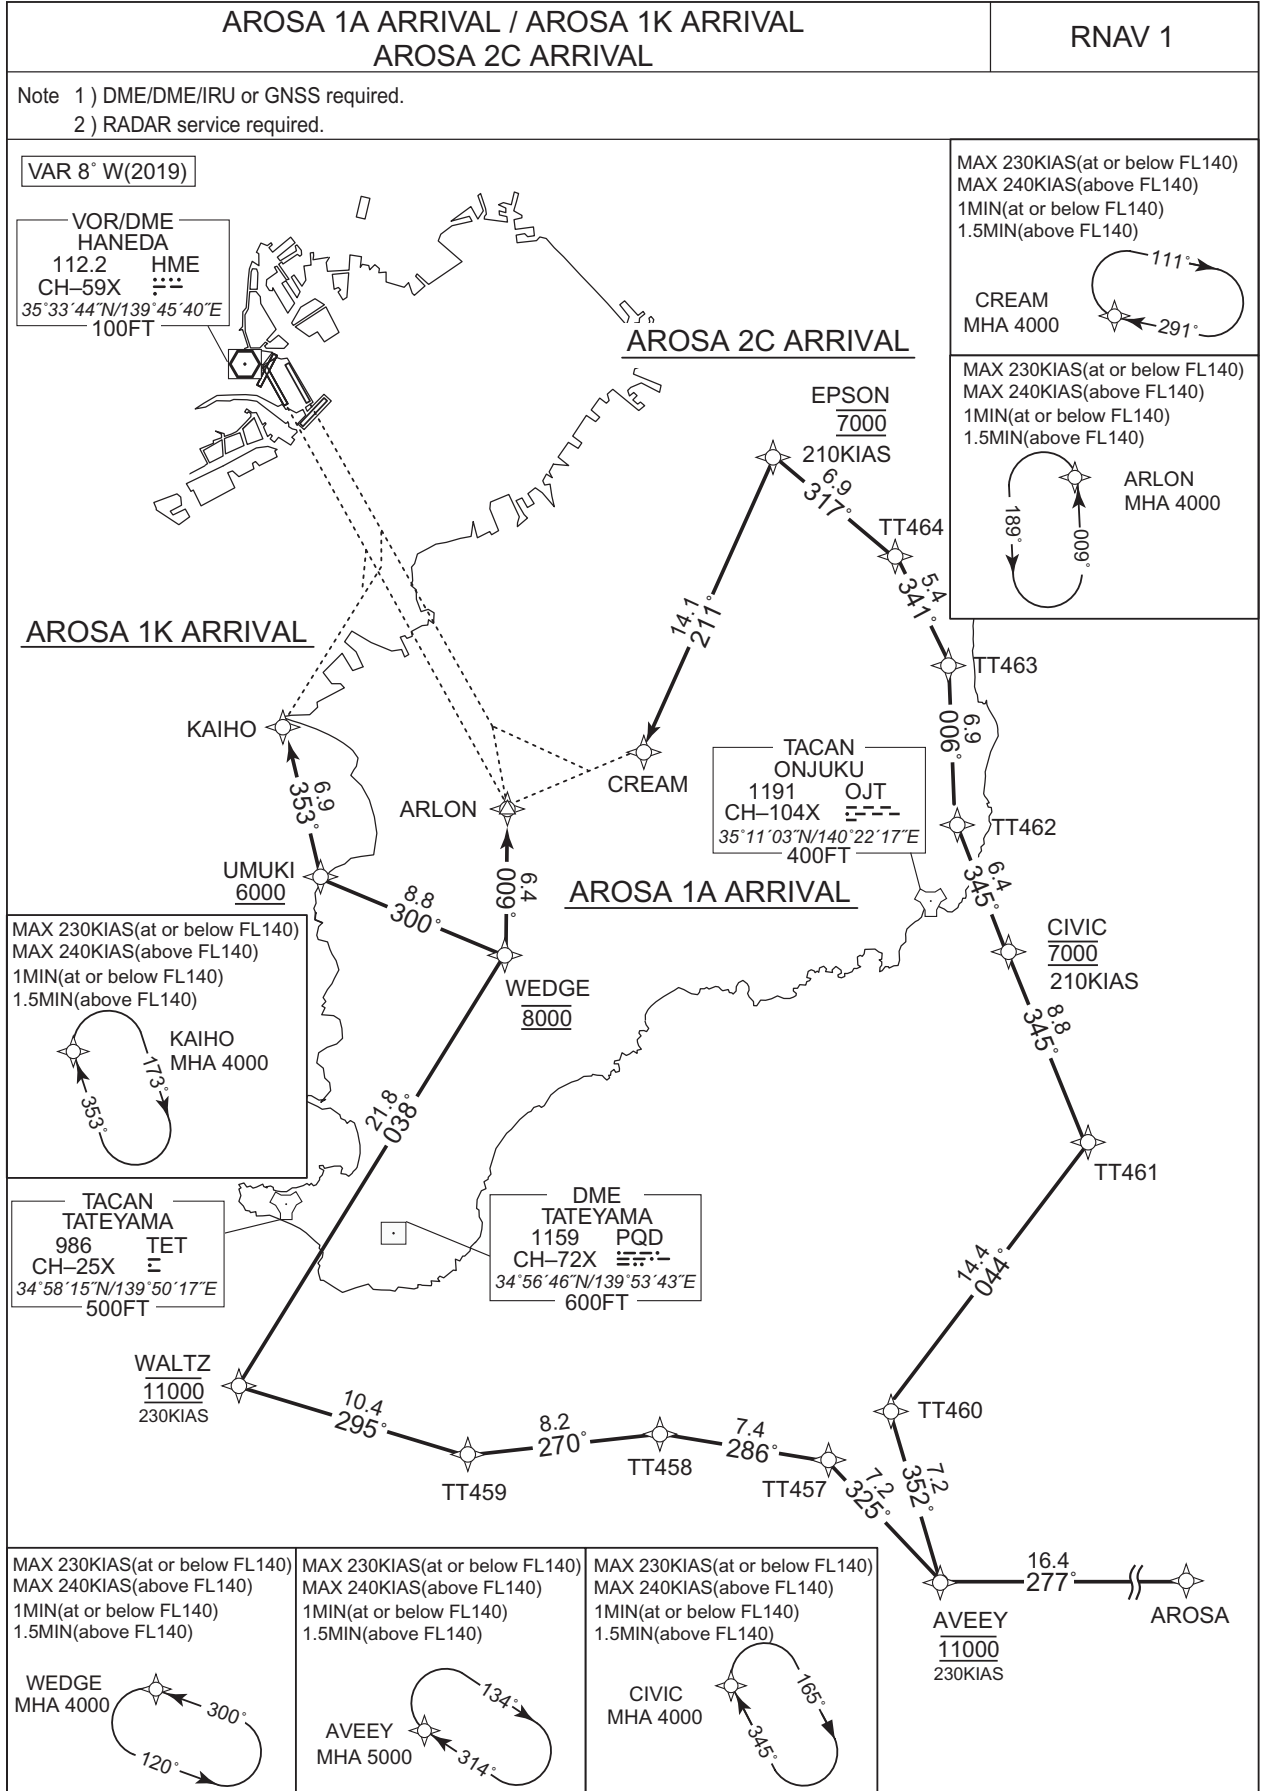

CHANGE : AVEEY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AROSA 1A ARRIVAL

From AROSA, to AVEEY at 11000FT, to TT457, to TT458, to TT459, to WALTZ at 11000FT, to WEDGE at 8000FT, to ARLON.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	TT457	-	325 (317.5)	-7.5	7.2	-	-	-	-	RNAV1
004	TF	TT458	-	286 (278.5)	-7.5	7.4	-	-	-	-	RNAV1
005	TF	TT459	-	270 (262.3)	-7.5	8.2	-	-	-	-	RNAV1
006	TF	WALTZ	-	295 (287.0)	-7.5	10.4	-	11000	230	-	RNAV1
007	TF	WEDGE	-	038 (030.6)	-7.5	21.8	-	8000	-	-	RNAV1
008	TF	ARLON	-	009 (001.6)	-7.5	6.4	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : AVEEY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AROSA 1K ARRIVAL

From AROSA, to AVEEY at 11000FT, to TT457, to TT458, to TT459, to WALTZ at 11000FT, to WEDGE at 8000FT, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	TT457	-	325 (317.5)	-7.5	7.2	-	-	-	-	RNAV1
004	TF	TT458	-	286 (278.5)	-7.5	7.4	-	-	-	-	RNAV1
005	TF	TT459	-	270 (262.3)	-7.5	8.2	-	-	-	-	RNAV1
006	TF	WALTZ	-	295 (287.0)	-7.5	10.4	-	11000	230	-	RNAV1
007	TF	WEDGE	-	038 (030.6)	-7.5	21.8	-	8000	-	-	RNAV1
008	TF	UMUKI	-	300 (292.2)	-7.5	8.8	-	+6000	-	-	RNAV1
009	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : AVEEY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AROSA 2C ARRIVAL

From AROSA, to AVEEY at 11000FT, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	TT460	-	352 (344.5)	-7.5	7.2	-	-	-	-	RNAV1
004	TF	TT461	-	044 (036.1)	-7.5	14.4	-	-	-	-	RNAV1
005	TF	CIVIC	-	345 (337.7)	-7.5	8.8	-	7000	210	-	RNAV1
006	TF	TT462	-	345 (337.7)	-7.5	6.4	-	-	-	-	RNAV1
007	TF	TT463	-	006 (358.0)	-7.5	6.9	-	-	-	-	RNAV1
008	TF	TT464	-	341 (333.5)	-7.5	5.4	-	-	-	-	RNAV1
009	TF	EPSON	-	317 (309.0)	-7.5	6.9	-	7000	210	-	RNAV1
010	TF	CREAM	-	211 (203.6)	-7.5	14.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARLON	351525.3N / 1395859.8E	TT459	344712.8N / 1395716.3E
AROSA	344201.7N / 1404157.3E	TT460	344852.6N / 1401936.8E
AVEEY	344155.9N / 1402158.0E	TT461	350030.2N / 1402957.9E
CIVIC	350840.6N / 1402552.1E	TT462	351433.3N / 1402254.8E
CREAM	351743.4N / 1400612.4E	TT463	352125.4N / 1402237.1E
EPSON	353036.2N / 1401305.9E	TT464	352617.6N / 1401938.6E
KAIHO	351857.8N / 1394642.4E	UMUKI	351219.1N / 1394849.2E
TT457	344714.3N / 1401602.7E	WALTZ	345014.4N / 1394510.7E
TT458	344819.1N / 1400710.5E	WEDGE	350900.4N / 1395846.5E

CHANGE : AVEEY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

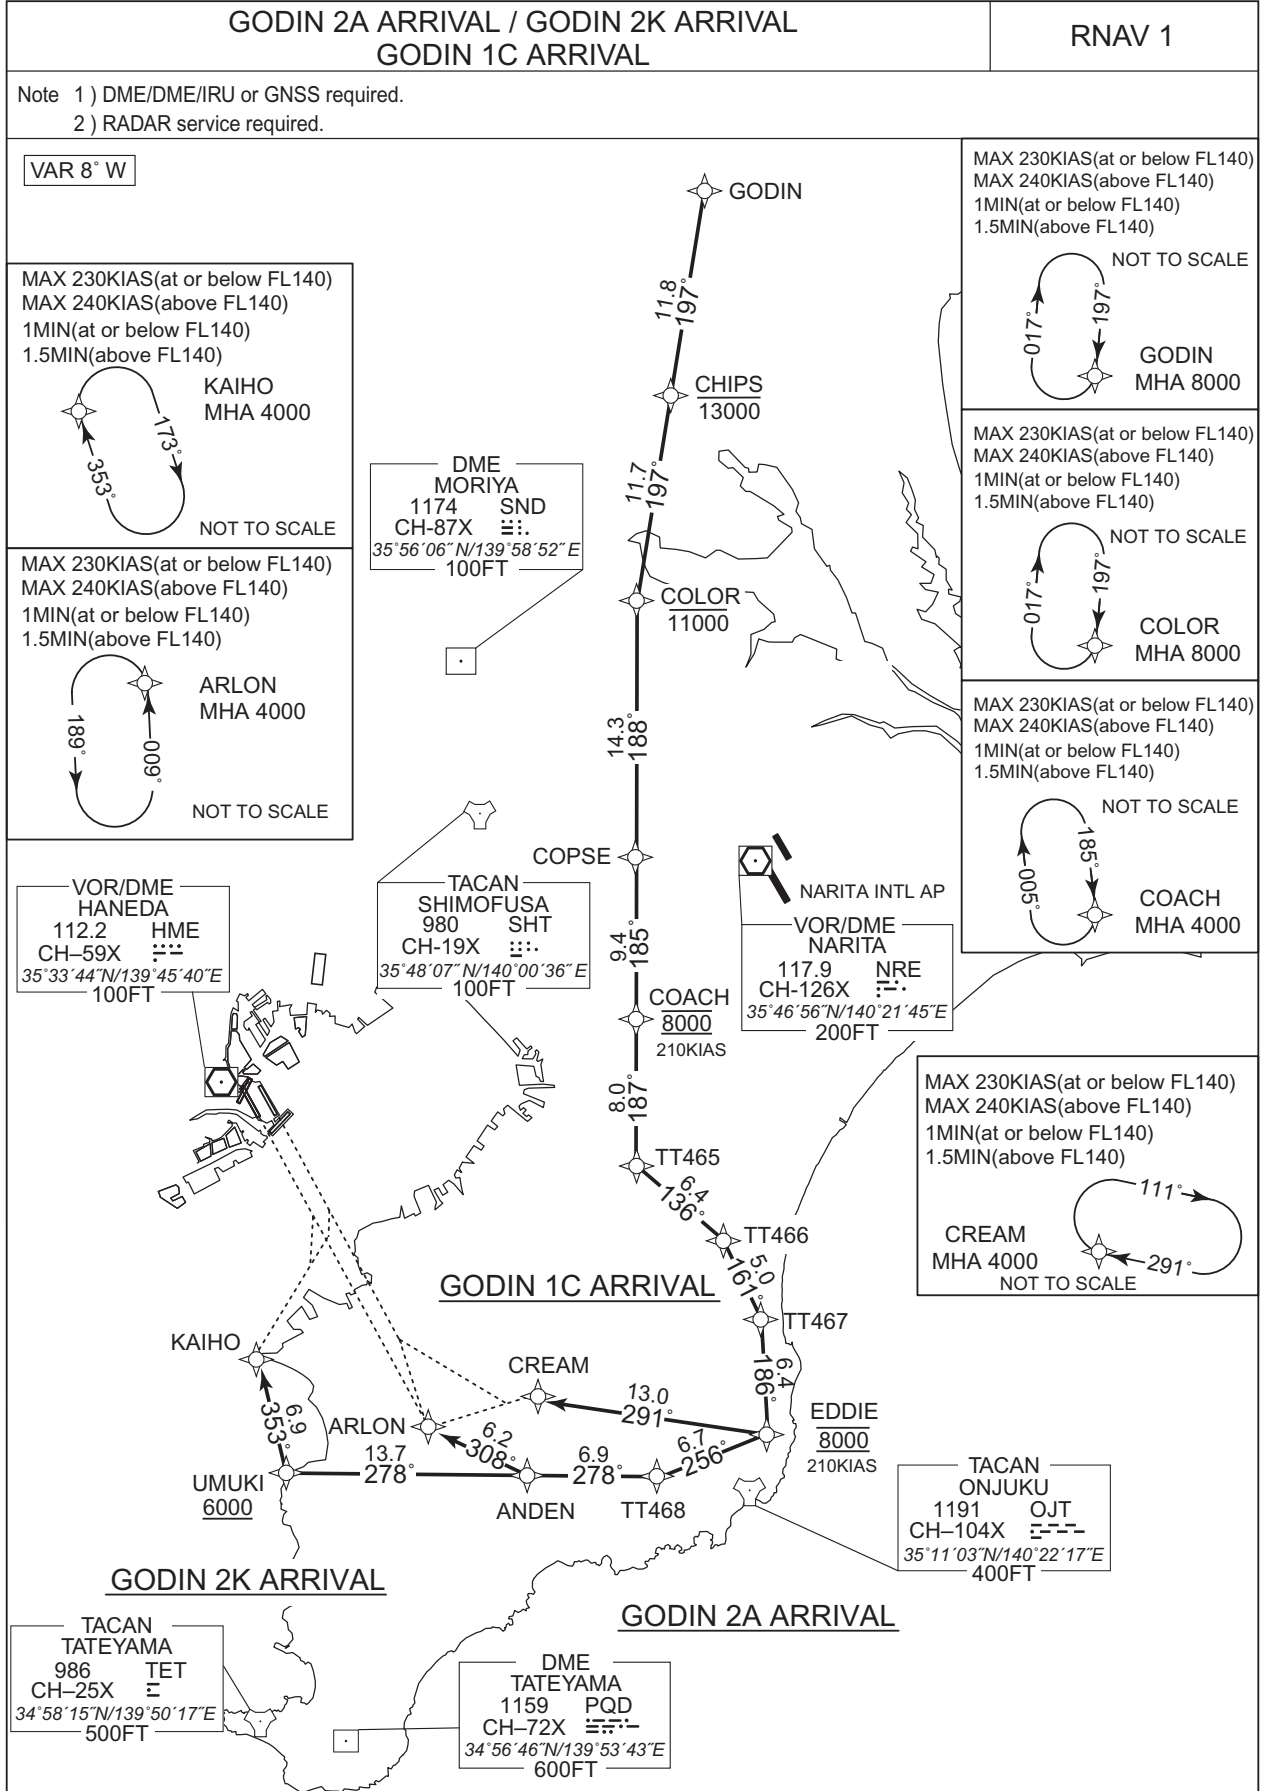

CHANGE : ANDEN established. TT469 abolished.



STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 2A ARRIVAL

From GODIN, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to ANDEN, to ARLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CHIPS	-	197 (189.1)	-7.5	11.8	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	TT468	-	256 (248.1)	-7.5	6.7	-	-	-	-	RNAV1
011	TF	ANDEN	-	278 (270.2)	-7.5	6.9	-	-	-	-	RNAV1
012	TF	ARLON	-	308 (300.2)	-7.5	6.2	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : ANDEN established. TT469 abolished.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 2K ARRIVAL

From GODIN ,to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to ANDEN, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CHIPS	-	197 (189.1)	-7.5	11.8	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	TT468	-	256 (248.1)	-7.5	6.7	-	-	-	-	RNAV1
011	TF	ANDEN	-	278 (270.2)	-7.5	6.9	-	-	-	-	RNAV1
012	TF	UMUKI	-	278 (270.2)	-7.5	13.7	-	+6000	-	-	RNAV1
013	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

CHANGE : ANDEN established. TT469 abolished.

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 1C ARRIVAL

From GODIN ,to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CHIPS	-	197 (189.1)	-7.5	11.8	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	CREAM	-	291 (283.1)	-7.5	13.0	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ANDEN	351217.9N / 1400534.7E	GODIN	362425.3N / 1401655.9E
ARLON	351525.3N / 1395859.8E	KAIHO	351857.8N / 1394642.4E
CHIPS	361247.7N / 1401436.9E	TT465	352939.2N / 1401235.4E
COACH	353736.0N / 1401231.5E	TT466	352539.0N / 1401840.1E
COLOR	360116.3N / 1401219.8E	TT467	352110.2N / 1402124.4E
COPSE	354658.8N / 1401205.4E	TT468	351216.4N / 1401402.6E
CREAM	351743.4N / 1400612.4E	UMUKI	351219.1N / 1394849.2E
EDDIE	351447.4N / 1402140.9E		

CHANGE : ANDEN established. TT469 abolished.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

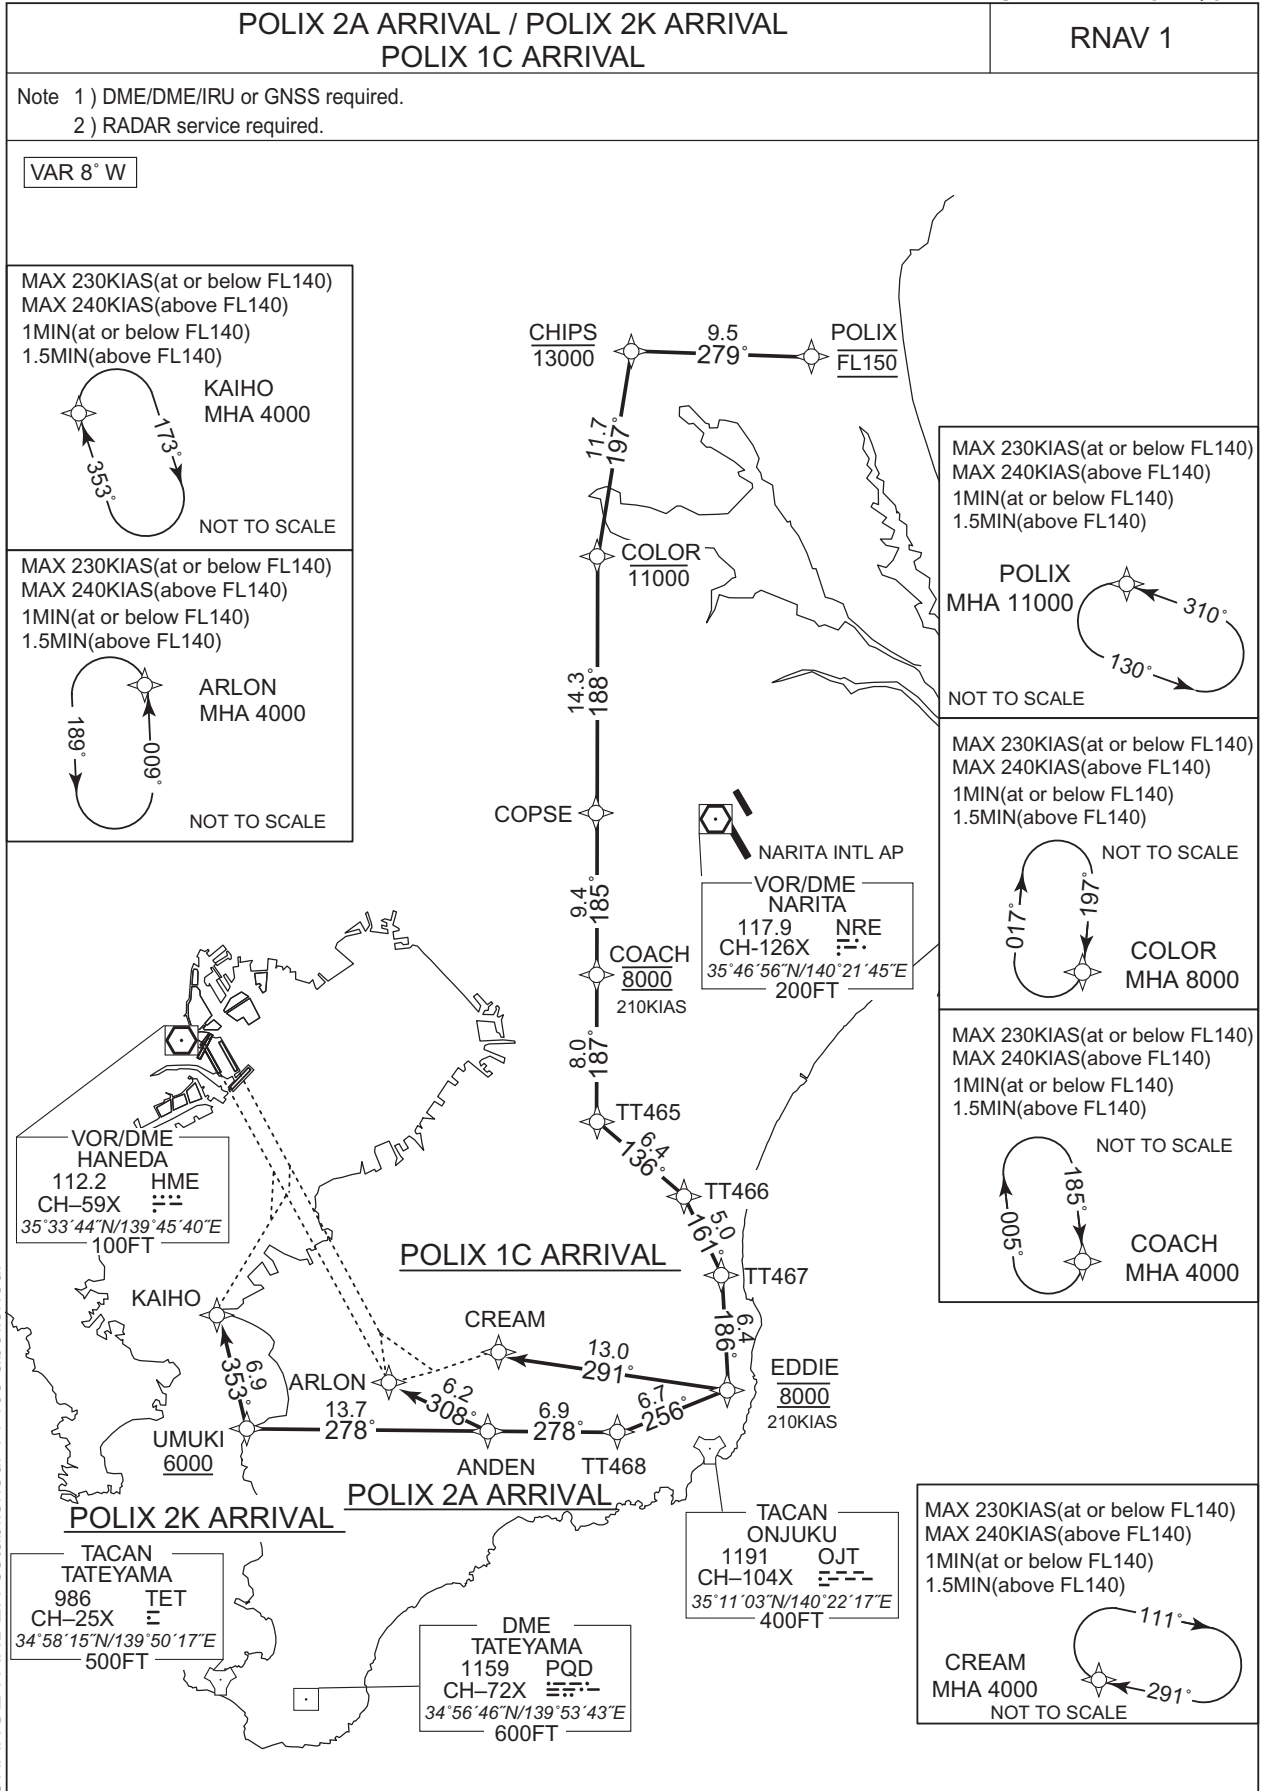

CHANGE : ANDEN established. TT469 abolished.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 2A ARRIVAL

From POLIX at FL150, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to ANDEN, to ARLON.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	CHIPS	-	279 (271.1)	-7.5	9.5	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	TT468	-	256 (248.1)	-7.5	6.7	-	-	-	-	RNAV1
011	TF	ANDEN	-	278 (270.2)	-7.5	6.9	-	-	-	-	RNAV1
012	TF	ARLON	-	308 (300.2)	-7.5	6.2	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : ANDEN established. TT469 abolished.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 2K ARRIVAL

From POLIX at FL150, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to ANDEN, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	CHIPS	-	279 (271.1)	-7.5	9.5	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	TT468	-	256 (248.1)	-7.5	6.7	-	-	-	-	RNAV1
011	TF	ANDEN	-	278 (270.2)	-7.5	6.9	-	-	-	-	RNAV1
012	TF	UMUKI	-	278 (270.2)	-7.5	13.7	-	+6000	-	-	RNAV1
013	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

CHANGE : ANDEN established. TT469 abolished.

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 1C ARRIVAL

From POLIX at FL150, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	CHIPS	-	279 (271.1)	-7.5	9.5	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	CREAM	-	291 (283.1)	-7.5	13.0	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ANDEN	351217.9N / 1400534.7E	KAIHO	351857.8N / 1394642.4E
ARLON	351525.3N / 1395859.8E	POLIX	361237.1N / 1402622.5E
CHIPS	361247.7N / 1401436.9E	TT465	352939.2N / 1401235.4E
COACH	353736.0N / 1401231.5E	TT466	352539.0N / 1401840.1E
COLOR	360116.3N / 1401219.8E	TT467	352110.2N / 1402124.4E
COPSE	354658.8N / 1401205.4E	TT468	351216.4N / 1401402.6E
CREAM	351743.4N / 1400612.4E	UMUKI	351219.1N / 1394849.2E
EDDIE	351447.4N / 1402140.9E		

CHANGE : ANDEN established. TT469 abolished.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 2H ARRIVAL / AKSEL 2H ARRIVAL  
AROSA 2H ARRIVAL



RNAV 1

Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

VAR 8° W(2019)

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

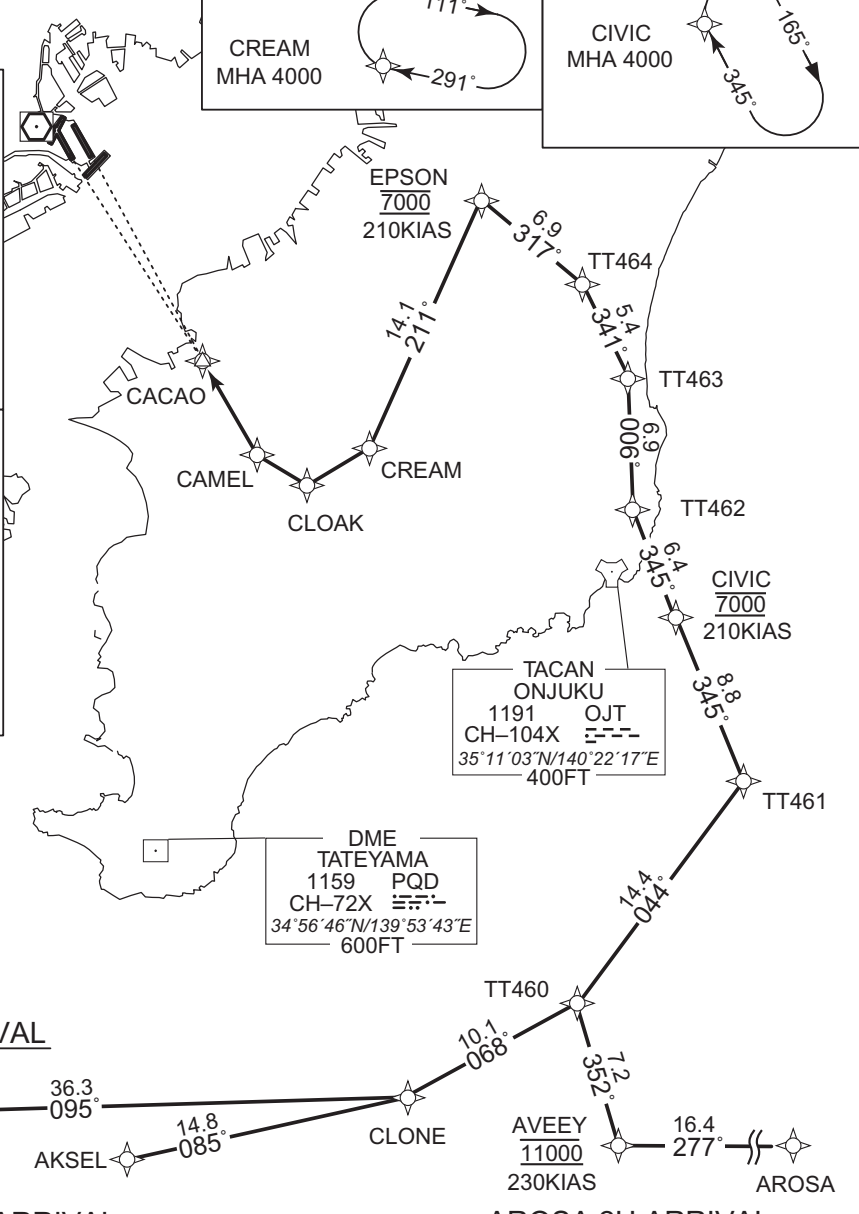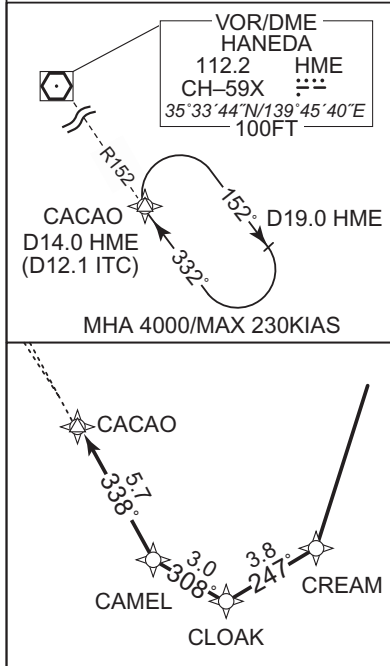


CHANGE : AVEEY renamed


MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)





STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 2H ARRIVAL

From XAC, to CLONE, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CLONE	-	095 (087.8)	-7.5	36.3	-	-	-	-	RNAV1
003	TF	TT460	-	068 (060.7)	-7.5	10.1	-	-	-	-	RNAV1
004	TF	TT461	-	044 (036.1)	-7.5	14.4	-	-	-	-	RNAV1
005	TF	CIVIC	-	345 (337.7)	-7.5	8.8	-	7000	210	-	RNAV1
006	TF	TT462	-	345 (337.7)	-7.5	6.4	-	-	-	-	RNAV1
007	TF	TT463	-	006 (358.0)	-7.5	6.9	-	-	-	-	RNAV1
008	TF	TT464	-	341 (333.5)	-7.5	5.4	-	-	-	-	RNAV1
009	TF	EPSON	-	317 (309.0)	-7.5	6.9	-	7000	210	-	RNAV1
010	TF	CREAM	-	211 (203.6)	-7.5	14.1	-	-	-	-	RNAV1
011	TF	CLOAK	-	247 (240.0)	-7.5	3.8	-	-	-	-	RNAV1
012	TF	CAMEL	-	308 (300.1)	-7.5	3.0	-	-	-	-	RNAV1
013	TF	CACAO	-	338 (330.1)	-7.5	5.7	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : Note added.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AKSEL 2H ARRIVAL

From AKSEL, to CLONE, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CLONE	-	085 (077.0)	-7.5	14.8	-	-	-	-	RNAV1
003	TF	TT460	-	068 (060.7)	-7.5	10.1	-	-	-	-	RNAV1
004	TF	TT461	-	044 (036.1)	-7.5	14.4	-	-	-	-	RNAV1
005	TF	CIVIC	-	345 (337.7)	-7.5	8.8	-	7000	210	-	RNAV1
006	TF	TT462	-	345 (337.7)	-7.5	6.4	-	-	-	-	RNAV1
007	TF	TT463	-	006 (358.0)	-7.5	6.9	-	-	-	-	RNAV1
008	TF	TT464	-	341 (333.5)	-7.5	5.4	-	-	-	-	RNAV1
009	TF	EPSON	-	317 (309.0)	-7.5	6.9	-	7000	210	-	RNAV1
010	TF	CREAM	-	211 (203.6)	-7.5	14.1	-	-	-	-	RNAV1
011	TF	CLOAK	-	247 (240.0)	-7.5	3.8	-	-	-	-	RNAV1
012	TF	CAMEL	-	308 (300.1)	-7.5	3.0	-	-	-	-	RNAV1
013	TF	CACAO	-	338 (330.1)	-7.5	5.7	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : Note added.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AROSA 2H ARRIVAL

From AROSA, to AVEEY at 11000FT, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, toTT464, to EPSON at 7000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	TT460	-	352 (344.5)	-7.5	7.2	-	-	-	-	RNAV1
004	TF	TT461	-	044 (036.1)	-7.5	14.4	-	-	-	-	RNAV1
005	TF	CIVIC	-	345 (337.7)	-7.5	8.8	-	7000	210	-	RNAV1
006	TF	TT462	-	345 (337.7)	-7.5	6.4	-	-	-	-	RNAV1
007	TF	TT463	-	006 (358.0)	-7.5	6.9	-	-	-	-	RNAV1
008	TF	TT464	-	341 (333.5)	-7.5	5.4	-	-	-	-	RNAV1
009	TF	EPSON	-	317 (309.0)	-7.5	6.9	-	7000	210	-	RNAV1
010	TF	CREAM	-	211 (203.6)	-7.5	14.1	-	-	-	-	RNAV1
011	TF	CLOAK	-	247 (240.0)	-7.5	3.8	-	-	-	-	RNAV1
012	TF	CAMEL	-	308 (300.1)	-7.5	3.0	-	-	-	-	RNAV1
013	TF	CACAO	-	338 (330.1)	-7.5	5.7	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : Note added.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	CREAM	351743.4N / 1400612.4E
AROSA	344201.7N / 1404157.3E	EPSON	353036.2N / 1401305.9E
AVEEY	344155.9N / 1402158.0E	TT460	344852.6N / 1401936.8E
CACAO	352212.8N / 1395530.1E	TT461	350030.2N / 1402957.9E
CAMEL	351718.2N / 1395857.8E	TT462	351433.3N / 1402254.8E
CIVIC	350840.6N / 1402552.1E	TT463	352125.4N / 1402237.1E
CLOAK	351548.0N / 1400208.2E	TT464	352617.6N / 1401938.6E
CLONE	344357.8N / 1400856.0E	XAC	344244.1N / 1392450.5E

CHANGE : AVEEY renamed

**INTENTIONALLY LEFT BLANK**

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 1H ARRIVAL  
POLIX 1H ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

VAR 8° W(2019)


GODIN 1H ARRIVAL

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)



POLIX 1H ARRIVAL



MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)






MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

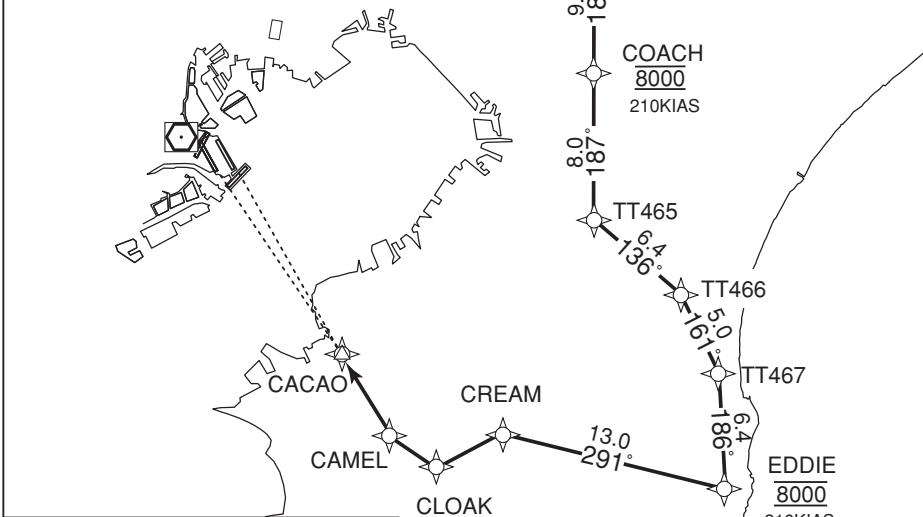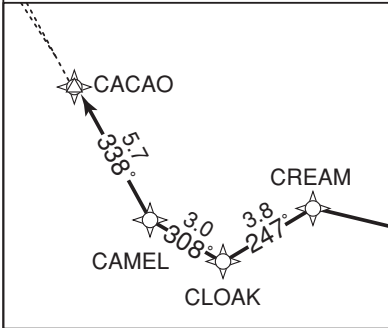

CHANGE : New PROC

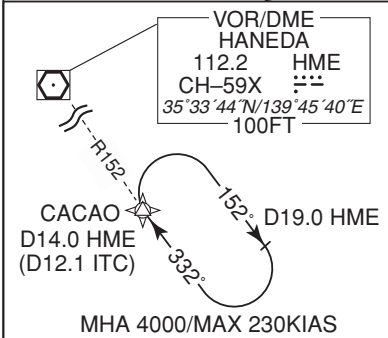

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 1H ARRIVAL

From GODIN, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CHIPS	-	197 (189.1)	-7.5	11.8	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	CREAM	-	291 (283.1)	-7.5	13.0	-	-	-	-	RNAV1
011	TF	CLOAK	-	247 (240.0)	-7.5	3.8	-	-	-	-	RNAV1
012	TF	CAMEL	-	308 (300.1)	-7.5	3.0	-	-	-	-	RNAV1
013	TF	CACAO	-	338 (330.1)	-7.5	5.7	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : Note added.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 1H ARRIVAL

From POLIX at FL150, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	CHIPS	-	279 (271.1)	-7.5	9.5	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	CREAM	-	291 (283.1)	-7.5	13.0	-	-	-	-	RNAV1
011	TF	CLOAK	-	247 (240.0)	-7.5	3.8	-	-	-	-	RNAV1
012	TF	CAMEL	-	308 (300.1)	-7.5	3.0	-	-	-	-	RNAV1
013	TF	CACAO	-	338 (330.1)	-7.5	5.7	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : Note added.



## STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
CACAO	352212.8N / 1395530.1E	CREAM	351743.4N / 1400612.4E
CAMEL	351718.2N / 1395857.8E	EDDIE	351447.4N / 1402140.9E
CHIPS	361247.7N / 1401436.9E	GODIN	362425.3N / 1401655.9E
CLOAK	351548.0N / 1400208.2E	POLIX	361237.1N / 1402622.5E
COACH	353736.0N / 1401231.5E	TT465	352939.2N / 1401235.4E
COLOR	360116.3N / 1401219.8E	TT466	352539.0N / 1401840.1E
COPSE	354658.8N / 1401205.4E	TT467	352110.2N / 1402124.4E

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

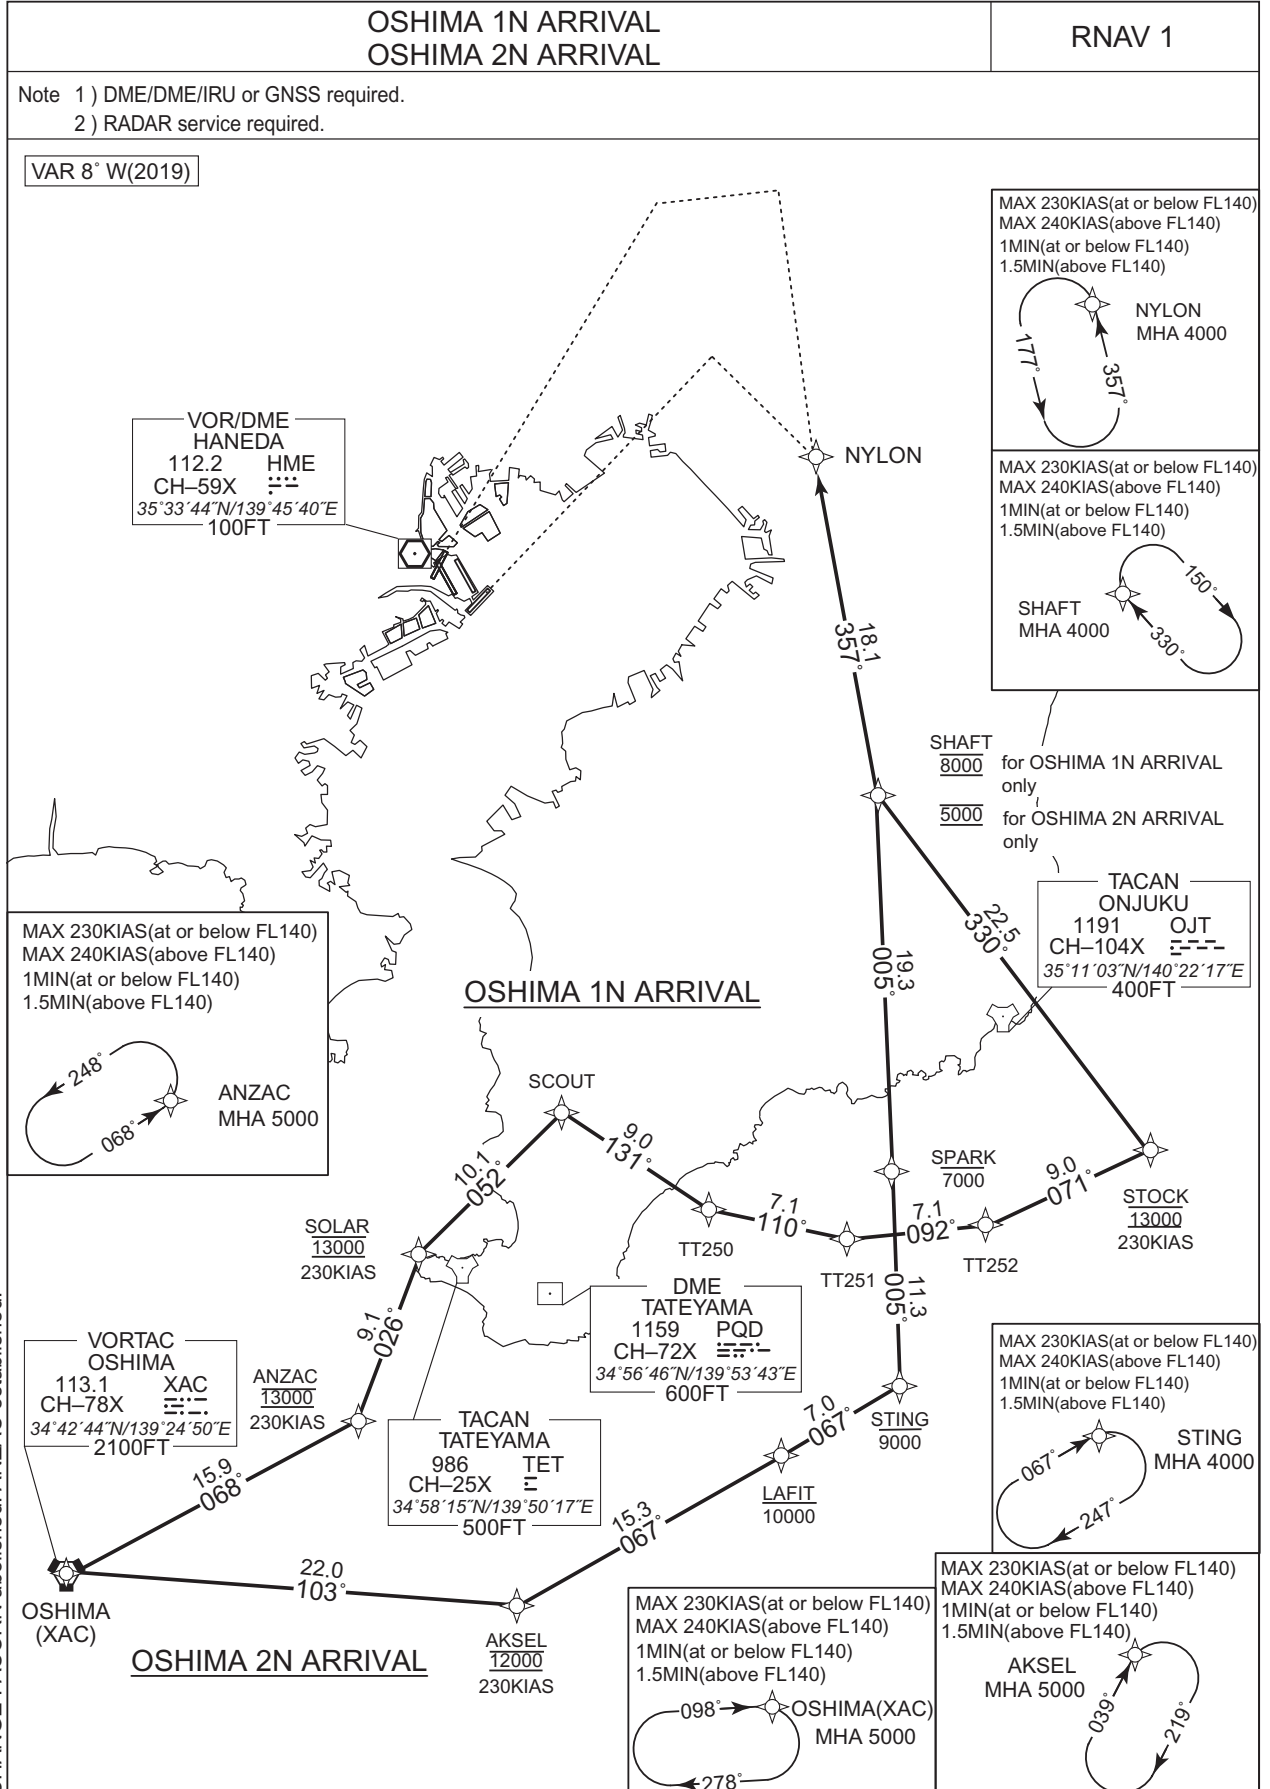

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

OSHIMA 1N ARRIVAL

From XAC, to ANZAC at 13000FT, to SOLAR at 13000FT, to SCOUT, to TT250, to TT251, to TT252, to STOCK at 13000FT, to SHAFT at 8000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	ANZAC	-	068 (060.8)	-7.5	15.9	-	13000	230	-	RNAV1
003	TF	SOLAR	-	026 (018.4)	-7.5	9.1	-	13000	230	-	RNAV1
004	TF	SCOUT	-	052 (044.3)	-7.5	10.1	-	-	-	-	RNAV1
005	TF	TT250	-	131 (123.1)	-7.5	9.0	-	-	-	-	RNAV1
006	TF	TT251	-	110 (102.5)	-7.5	7.1	-	-	-	-	RNAV1
007	TF	TT252	-	092 (084.3)	-7.5	7.1	-	-	-	-	RNAV1
008	TF	STOCK	-	071 (063.6)	-7.5	9.0	-	13000	230	-	RNAV1
009	TF	SHAFT	-	330 (322.4)	-7.5	22.5	-	8000	-	-	RNAV1
010	TF	NYLON	-	357 (350.0)	-7.5	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : ACORN abolished. ANZAC established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

OSHIMA 2N ARRIVAL

From XAC, to AKSEL at 12000FT, to LAFIT at or below 10000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AKSEL	-	103 (095.3)	-7.5	22.0	-	12000	230	-	RNAV1
003	TF	LAFIT	-	067 (059.5)	-7.5	15.3	-	-10000	-	-	RNAV1
004	TF	STING	-	067 (059.6)	-7.5	7.0	-	-9000	-	-	RNAV1
005	TF	SPARK	-	005 (357.4)	-7.5	11.3	-	-7000	-	-	RNAV1
006	TF	SHAFT	-	005 (357.4)	-7.5	19.3	-	5000	-	-	RNAV1
007	TF	NYLON	-	357 (350.0)	-7.5	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	SPARK	350312.0N / 1401416.7E
ANZAC	345028.8N / 1394146.7E	STOCK	350438.7N / 1403002.9E
LAFIT	344826.0N / 1400732.4E	STING	345157.9N / 1401453.4E
NYLON	354018.5N / 1400919.9E	TT250	350129.7N / 1400308.5E
SCOUT	350624.1N / 1395356.8E	TT251	345957.7N / 1401136.0E
SHAFT	352227.4N / 1401313.3E	TT252	350039.9N / 1402013.0E
SOLAR	345909.2N / 1394518.5E	XAC	344244.1N / 1392450.5E

CHANGE : ACORN abolished. ANZAC established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

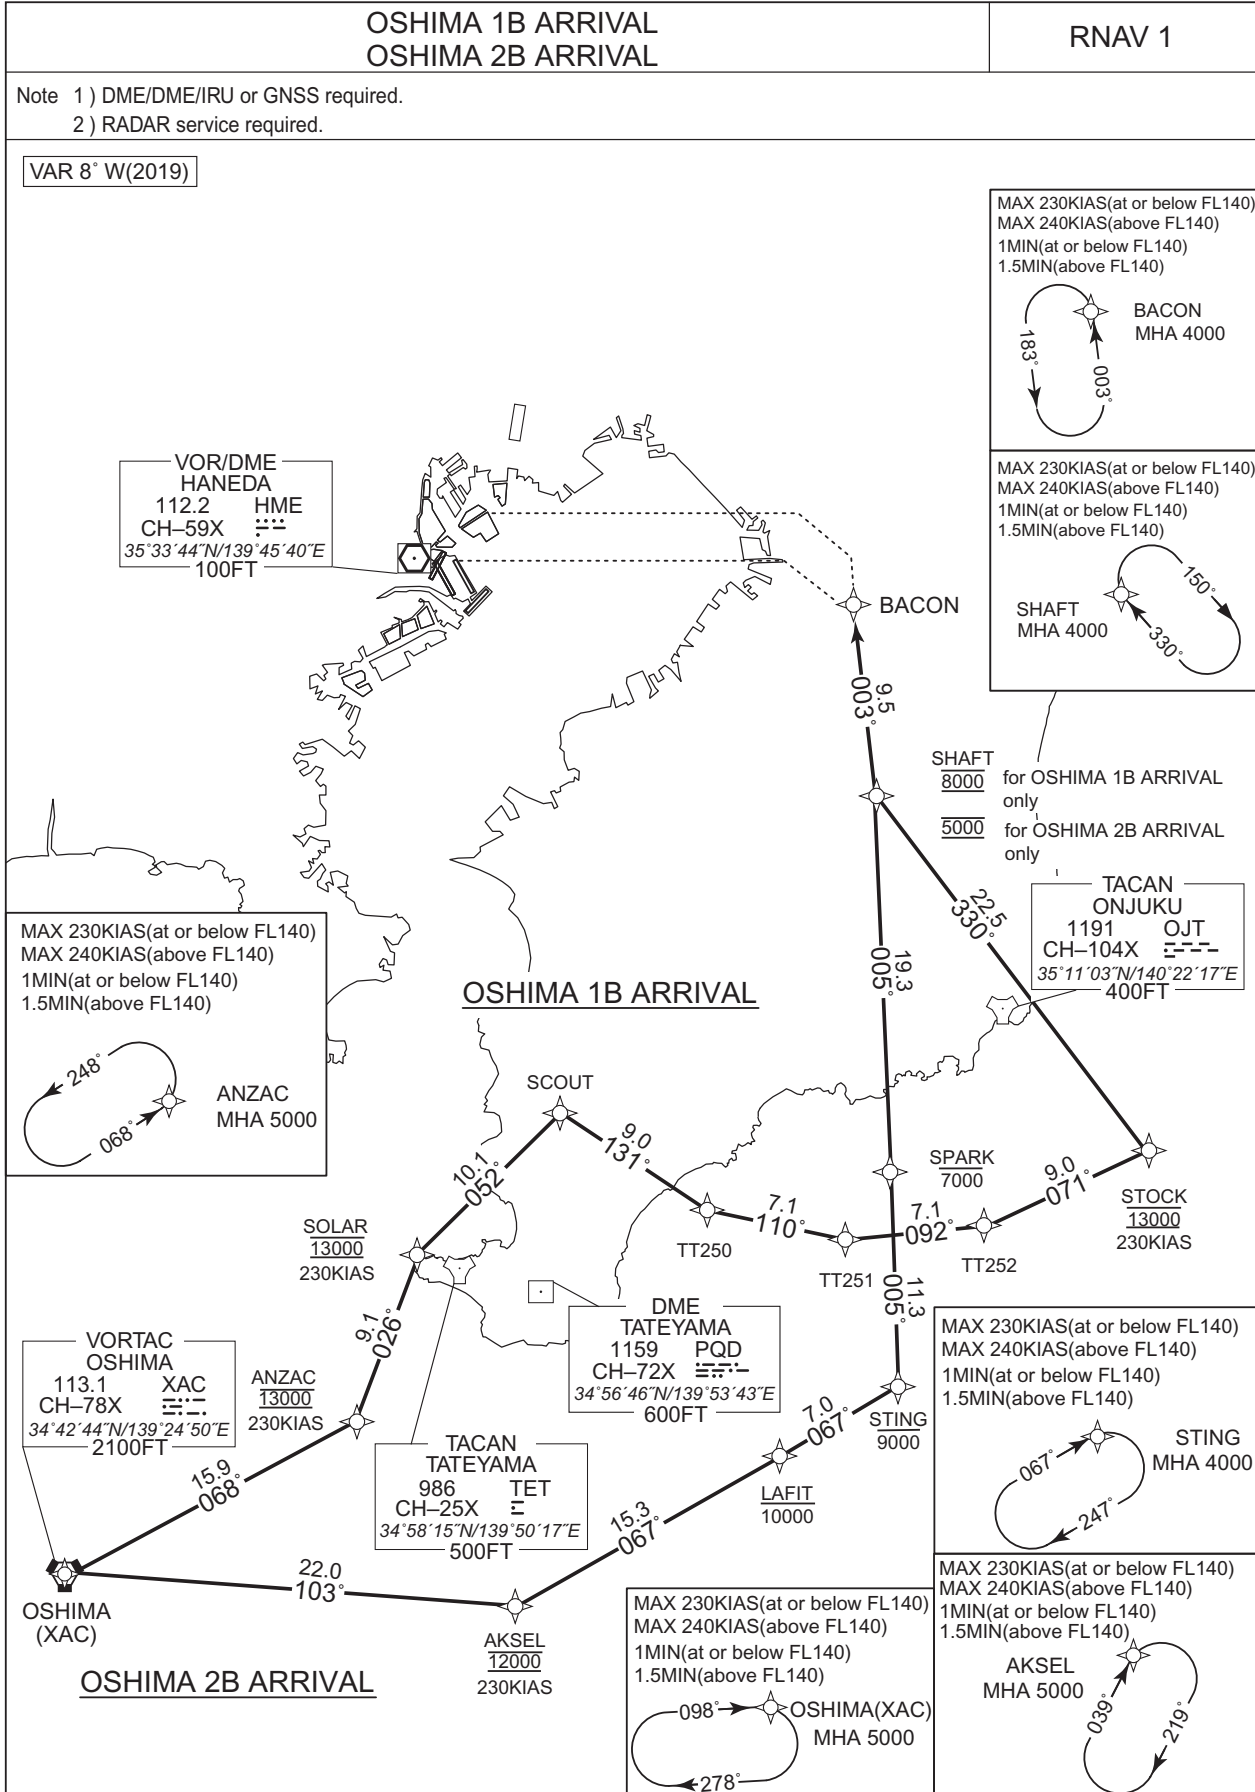

CHANGE : ACORN abolished. ANZAC established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

OSHIMA 1B ARRIVAL

From XAC, to ANZAC at 13000FT, to SOLAR at 13000FT, to SCOUT, to TT250, to TT251, to TT252, to STOCK at 13000FT, to SHAFT at 8000FT, to BACON.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	ANZAC	-	068 (060.8)	-7.5	15.9	-	13000	230	-	RNAV1
003	TF	SOLAR	-	026 (018.4)	-7.5	9.1	-	13000	230	-	RNAV1
004	TF	SCOUT	-	052 (044.3)	-7.5	10.1	-	-	-	-	RNAV1
005	TF	TT250	-	131 (123.1)	-7.5	9.0	-	-	-	-	RNAV1
006	TF	TT251	-	110 (102.5)	-7.5	7.1	-	-	-	-	RNAV1
007	TF	TT252	-	092 (084.3)	-7.5	7.1	-	-	-	-	RNAV1
008	TF	STOCK	-	071 (063.6)	-7.5	9.0	-	13000	230	-	RNAV1
009	TF	SHAFT	-	330 (322.4)	-7.5	22.5	-	8000	-	-	RNAV1
010	TF	BACON	-	003 (355.2)	-7.5	9.5	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : ACORN abolished. ANZAC established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

OSHIMA 2B ARRIVAL

From XAC, to AKSEL at 12000FT, to LAFIT at or below 10000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to BACON.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AKSEL	-	103 (095.3)	-7.5	22.0	-	12000	230	-	RNAV1
003	TF	LAFIT	-	067 (059.5)	-7.5	15.3	-	-10000	-	-	RNAV1
004	TF	STING	-	067 (059.6)	-7.5	7.0	-	-9000	-	-	RNAV1
005	TF	SPARK	-	005 (357.4)	-7.5	11.3	-	-7000	-	-	RNAV1
006	TF	SHAFT	-	005 (357.4)	-7.5	19.3	-	5000	-	-	RNAV1
007	TF	BACON	-	003 (355.2)	-7.5	9.5	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	SPARK	350312.0N / 1401416.7E
ANZAC	345028.8N / 1394146.7E	STOCK	350438.7N / 1403002.9E
BACON	353155.0N / 1401215.1E	STING	345157.9N / 1401453.4E
LAFIT	344826.0N / 1400732.4E	TT250	350129.7N / 1400308.5E
SCOUT	350624.1N / 1395356.8E	TT251	345957.7N / 1401136.0E
SHAFT	352227.4N / 1401313.3E	TT252	350039.9N / 1402013.0E
SOLAR	345909.2N / 1394518.5E	XAC	344244.1N / 1392450.5E

CHANGE : ACORN abolished. ANZAC established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

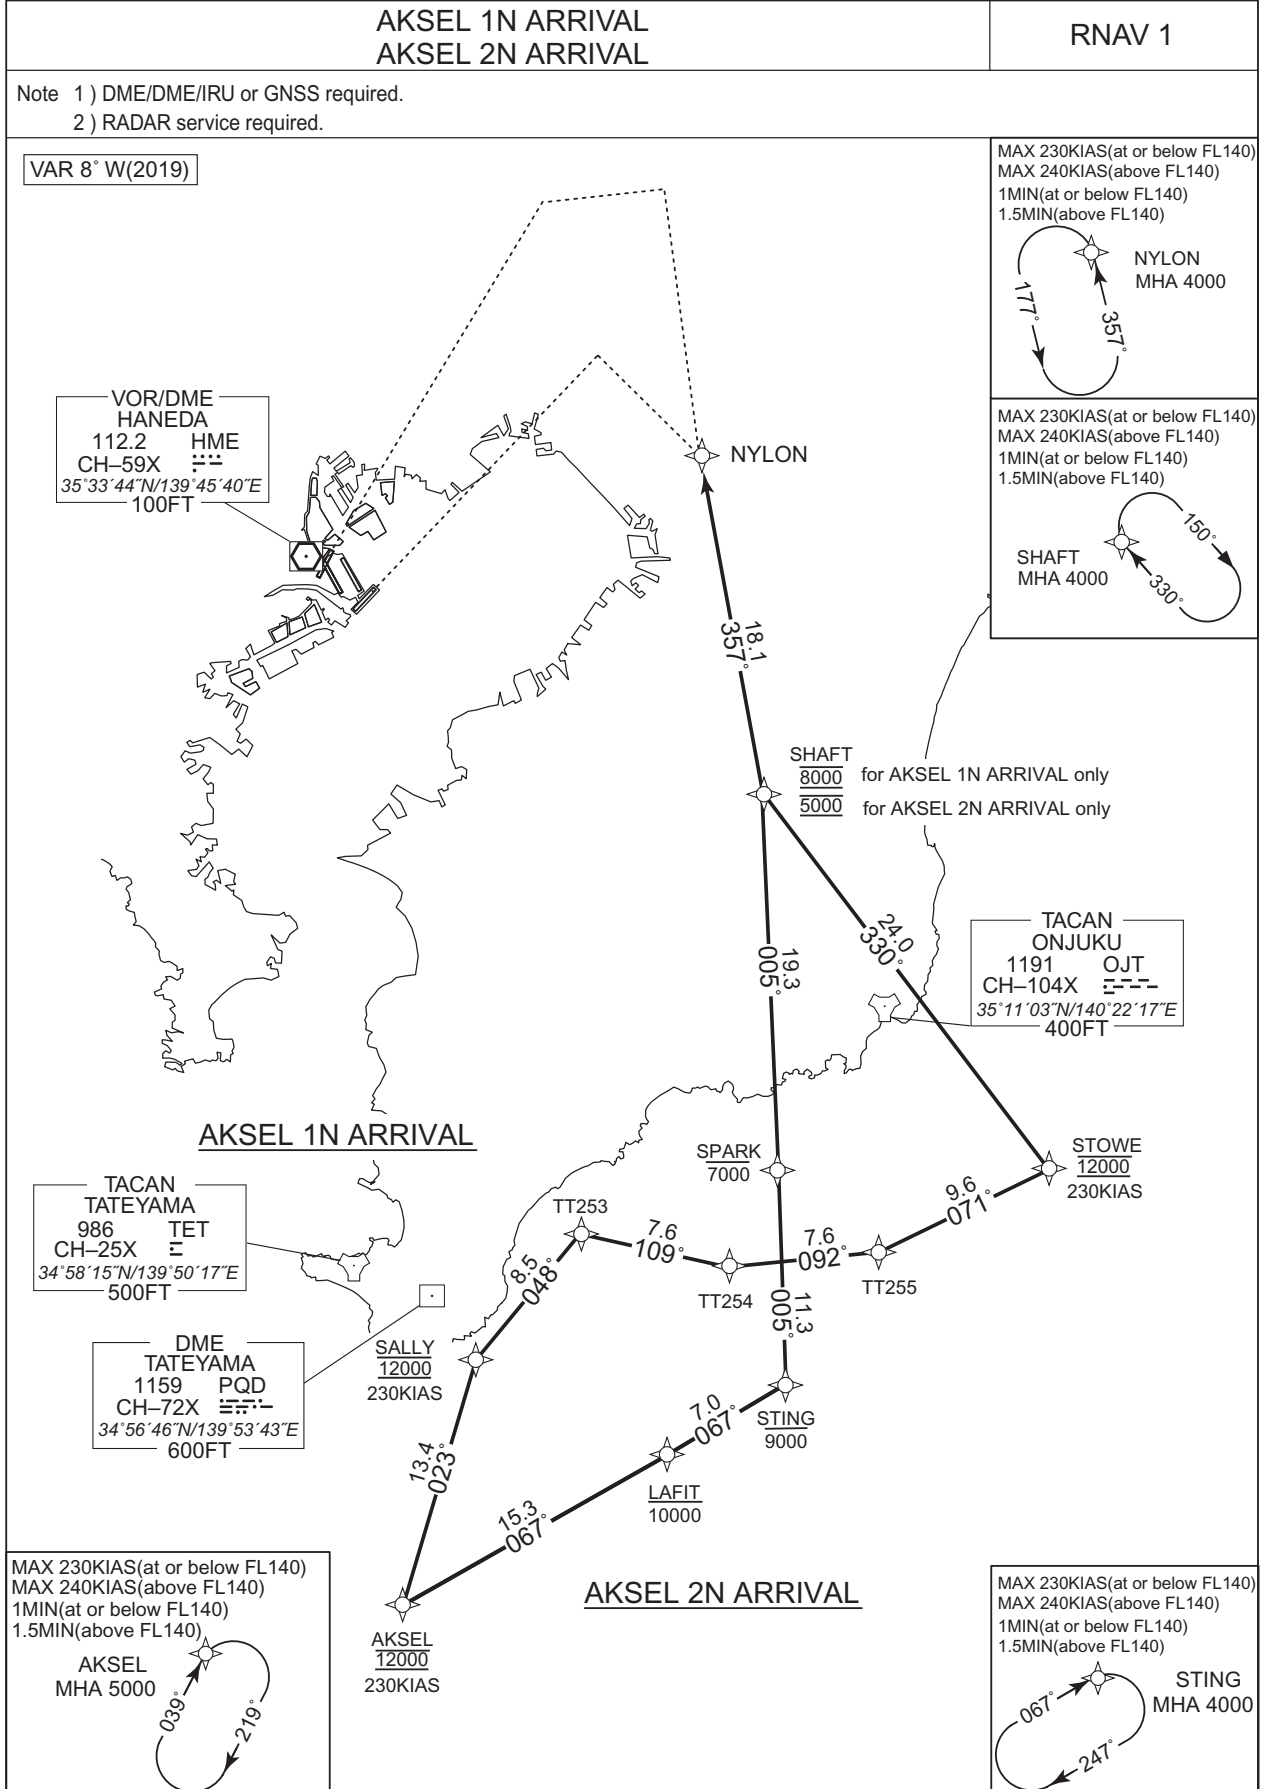

CHANGE : STOWE renamed



STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 1N ARRIVAL

From AKSEL at 12000FT, to SALLY at 12000FT, to TT253, to TT254, to TT255, to STOWE at 12000FT, to SHAFT at 8000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	12000	230	-	RNAV1
002	TF	SALLY	-	023 (015.0)	-7.5	13.4	-	12000	230	-	RNAV1
003	TF	TT253	-	048 (040.5)	-7.5	8.5	-	-	-	-	RNAV1
004	TF	TT254	-	109 (102.0)	-7.5	7.6	-	-	-	-	RNAV1
005	TF	TT255	-	092 (084.4)	-7.5	7.6	-	-	-	-	RNAV1
006	TF	STOWE	-	071 (063.6)	-7.5	9.6	-	12000	230	-	RNAV1
007	TF	SHAFT	-	330 (322.4)	-7.5	24.0	-	8000	-	-	RNAV1
008	TF	NYLON	-	357 (350.0)	-7.5	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : STOWE renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 2N ARRIVAL

From AKSEL at 12000FT, to LAFIT at or below 10000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	12000	230	-	RNAV1
002	TF	LAFIT	-	067 (059.5)	-7.5	15.3	-	-10000	-	-	RNAV1
003	TF	STING	-	067 (059.6)	-7.5	7.0	-	-9000	-	-	RNAV1
004	TF	SPARK	-	005 (357.4)	-7.5	11.3	-	-7000	-	-	RNAV1
005	TF	SHAFT	-	005 (357.4)	-7.5	19.3	-	5000	-	-	RNAV1
006	TF	NYLON	-	357 (350.0)	-7.5	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	STING	345157.9N / 1401453.4E
LAFIT	344826.0N / 1400732.4E	STOWE	350325.9N / 1403111.4E
NYLON	354018.5N / 1400919.9E	TT253	350001.4N / 1400224.6E
SALLY	345333.9N / 1395540.1E	TT254	345826.5N / 1401129.4E
SHAFT	352227.4N / 1401313.3E	TT255	345910.9N / 1402041.4E
SPARK	350312.0N / 1401416.7E		

CHANGE : STOWE renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 1B ARRIVAL  
AKSEL 2B ARRIVAL


RNAV 1

Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.



VAR 8° W(2019)

VOR/DME  
HANEDA  
112.2 HME  
CH-59X  
35°33'44"N/139°45'40"E  
100FT

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

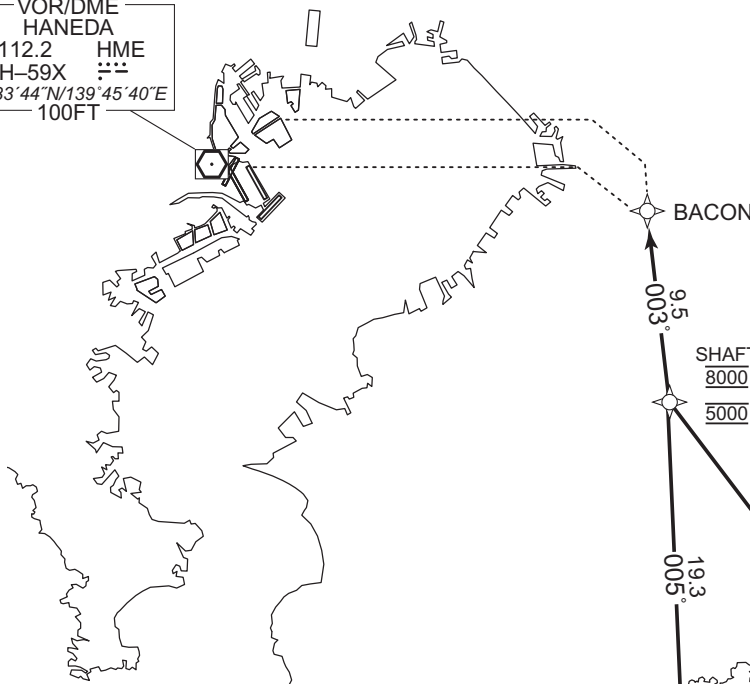

SHAFT  
8000 for AKSEL 1B ARRIVAL only  
5000 for AKSEL 2B ARRIVAL only

TACAN  
ONJUKU  
1191 OJT  
CH-104X  
35°11'03"N/140°22'17"E  
400FT

AKSEL 1B ARRIVAL

TACAN  
TATEYAMA  
986 TET  
CH-25X  
34°58'15"N/139°50'17"E  
500FT

DME  
TATEYAMA  
1159 PQD  
CH-72X  
34°56'46"N/139°53'43"E  
600FT

SPARK  
7000

STOWE  
12000  
230KIAS

AKSEL 2B ARRIVAL

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)



CHANGE : STOWE renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 1B ARRIVAL

From AKSEL at 12000FT, to SALLY at 12000FT, to TT253, to TT254, to TT255, to STOWE at 12000FT, to SHAFT at 8000FT, to BACON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	12000	230	-	RNAV1
002	TF	SALLY	-	023 (015.0)	-7.5	13.4	-	12000	230	-	RNAV1
003	TF	TT253	-	048 (040.5)	-7.5	8.5	-	-	-	-	RNAV1
004	TF	TT254	-	109 (102.0)	-7.5	7.6	-	-	-	-	RNAV1
005	TF	TT255	-	092 (084.4)	-7.5	7.6	-	-	-	-	RNAV1
006	TF	STOWE	-	071 (063.6)	-7.5	9.6	-	12000	230	-	RNAV1
007	TF	SHAFT	-	330 (322.4)	-7.5	24.0	-	8000	-	-	RNAV1
008	TF	BACON	-	003 (355.2)	-7.5	9.5	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : STOWE renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 2B ARRIVAL

From AKSEL at 12000FT, to LAFIT at or below 10000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to BACON.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	12000	230	-	RNAV1
002	TF	LAFIT	-	067 (059.5)	-7.5	15.3	-	-10000	-	-	RNAV1
003	TF	STING	-	067 (059.6)	-7.5	7.0	-	-9000	-	-	RNAV1
004	TF	SPARK	-	005 (357.4)	-7.5	11.3	-	-7000	-	-	RNAV1
005	TF	SHAFT	-	005 (357.4)	-7.5	19.3	-	5000	-	-	RNAV1
006	TF	BACON	-	003 (355.2)	-7.5	9.5	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	STING	345157.9N / 1401453.4E
BACON	353155.0N / 1401215.1E	STOWE	350325.9N / 1403111.4E
LAFIT	344826.0N / 1400732.4E	TT253	350001.4N / 1400224.6E
SALLY	345333.9N / 1395540.1E	TT254	345826.5N / 1401129.4E
SHAFT	352227.4N / 1401313.3E	TT255	345910.9N / 1402041.4E
SPARK	350312.0N / 1401416.7E		

CHANGE : STOWE renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

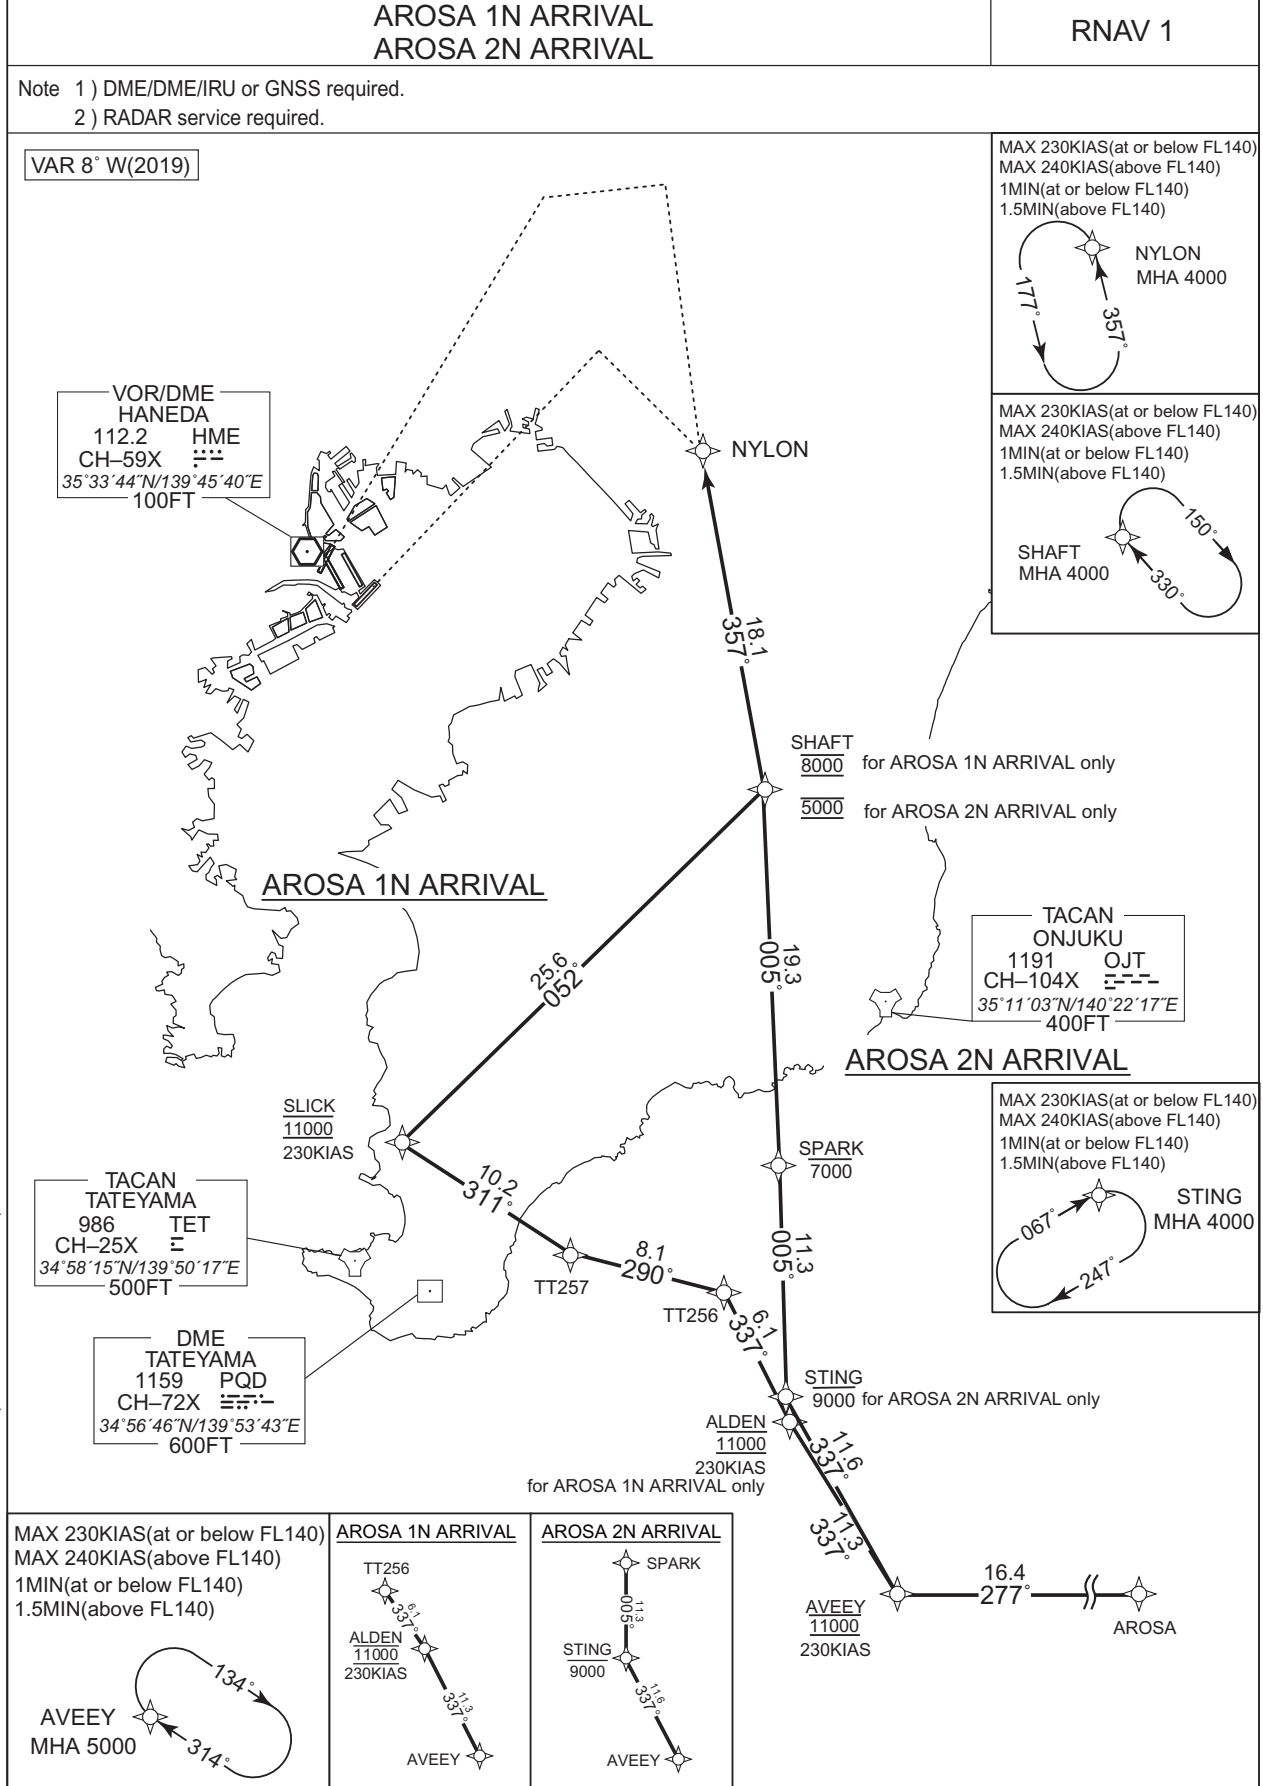

CHANGE : RTE FM AVEEY to TT256 (ALDEN established)

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 1N ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SLICK at 11000FT, to SHAFT at 8000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	ALDEN	-	337 (330.0)	-7.5	11.3	-	11000	230	-	RNAV1
004	TF	TT256	-	337 (329.9)	-7.5	6.1	-	-	-	-	RNAV1
005	TF	TT257	-	290 (282.4)	-7.5	8.1	-	-	-	-	RNAV1
006	TF	SLICK	-	311 (303.1)	-7.5	10.2	-	11000	230	-	RNAV1
007	TF	SHAFT	-	052 (044.3)	-7.5	25.6	-	8000	-	-	RNAV1
008	TF	NYLON	-	357 (350.0)	-7.5	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : RTE FM AVEEY to TT256 (ALDEN established). HLDG pattern at STING deleted.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 2N ARRIVAL

From AROSA, to AVEEY at 11000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	STING	-	337 (330.0)	-7.5	11.6	-	-9000	-	-	RNAV1
004	TF	SPARK	-	005 (357.4)	-7.5	11.3	-	-7000	-	-	RNAV1
005	TF	SHAFT	-	005 (357.4)	-7.5	19.3	-	5000	-	-	RNAV1
006	TF	NYLON	-	357 (350.0)	-7.5	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ALDEN	345141.1N / 1401505.3E	SLICK	350412.7N / 1395120.0E
AROSA	344201.7N / 1404157.3E	SPARK	350312.0N / 1401416.7E
AVEEY	344155.9N / 1402158.0E	STING	345157.9N / 1401453.4E
NYLON	354018.5N / 1400919.9E	TT256	345655.4N / 1401122.9E
SHAFT	352227.4N / 1401313.3E	TT257	345838.5N / 1400146.6E

CHANGE : ALDEN established



STANDARD ARRIVAL CHART-INSTRUMENT


RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 1B ARRIVAL  
AROSA 2B ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

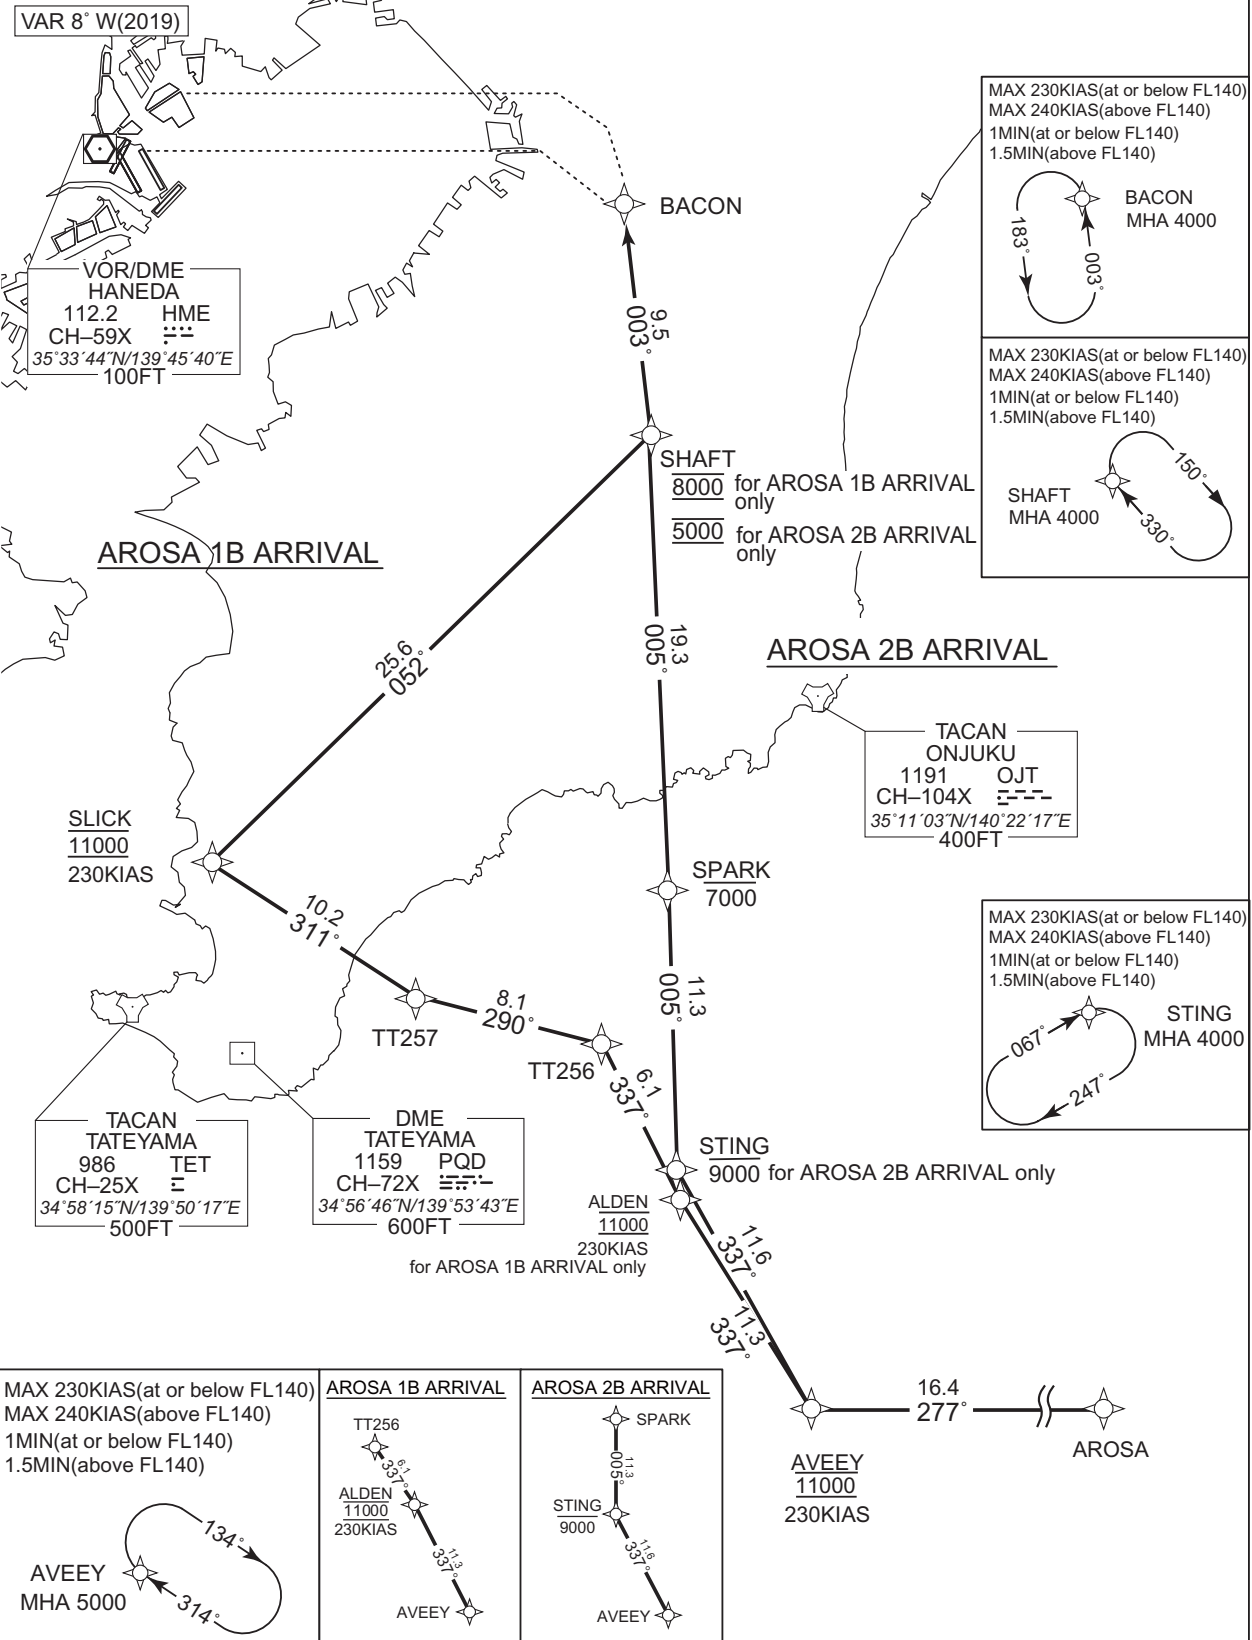

CHANGE : RTE FM AVEEY to TT256 (ALDEN established)

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 1B ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SLICK at 11000FT, to SHAFT at 8000FT, to BACON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	ALDEN	-	337 (330.0)	-7.5	11.3	-	11000	230	-	RNAV1
004	TF	TT256	-	337 (329.9)	-7.5	6.1	-	-	-	-	RNAV1
005	TF	TT257	-	290 (282.4)	-7.5	8.1	-	-	-	-	RNAV1
006	TF	SLICK	-	311 (303.1)	-7.5	10.2	-	11000	230	-	RNAV1
007	TF	SHAFT	-	052 (044.3)	-7.5	25.6	-	8000	-	-	RNAV1
008	TF	BACON	-	003 (355.2)	-7.5	9.5	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : RTE FM AVEEY to TT256 (ALDEN established). HLDG pattern at STING deleted.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 2B ARRIVAL

From AROSA, to AVEEY at 11000FT, to STING at or below 9000FT , to SPARK at or below 7000FT, to SHAFT at 5000FT, to BACON.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	STING	-	337 (330.0)	-7.5	11.6	-	-9000	-	-	RNAV1
004	TF	SPARK	-	005 (357.4)	-7.5	11.3	-	-7000	-	-	RNAV1
005	TF	SHAFT	-	005 (357.4)	-7.5	19.3	-	5000	-	-	RNAV1
006	TF	BACON	-	003 (355.2)	-7.5	9.5	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ALDEN	345141.1N / 1401505.3E	SLICK	350412.7N / 1395120.0E
AROSA	344201.7N / 1404157.3E	SPARK	350312.0N / 1401416.7E
AVEEY	344155.9N / 1402158.0E	STING	345157.9N / 1401453.4E
BACON	353155.0N / 1401215.1E	TT256	345655.4N / 1401122.9E
SHAFT	352227.4N / 1401313.3E	TT257	345838.5N / 1400146.6E

CHANGE : ALDEN established

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL


RNAV STAR RWY22/23

GODIN 1S ARRIVAL  
GODIN 1D ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

VAR 8° W(2019)

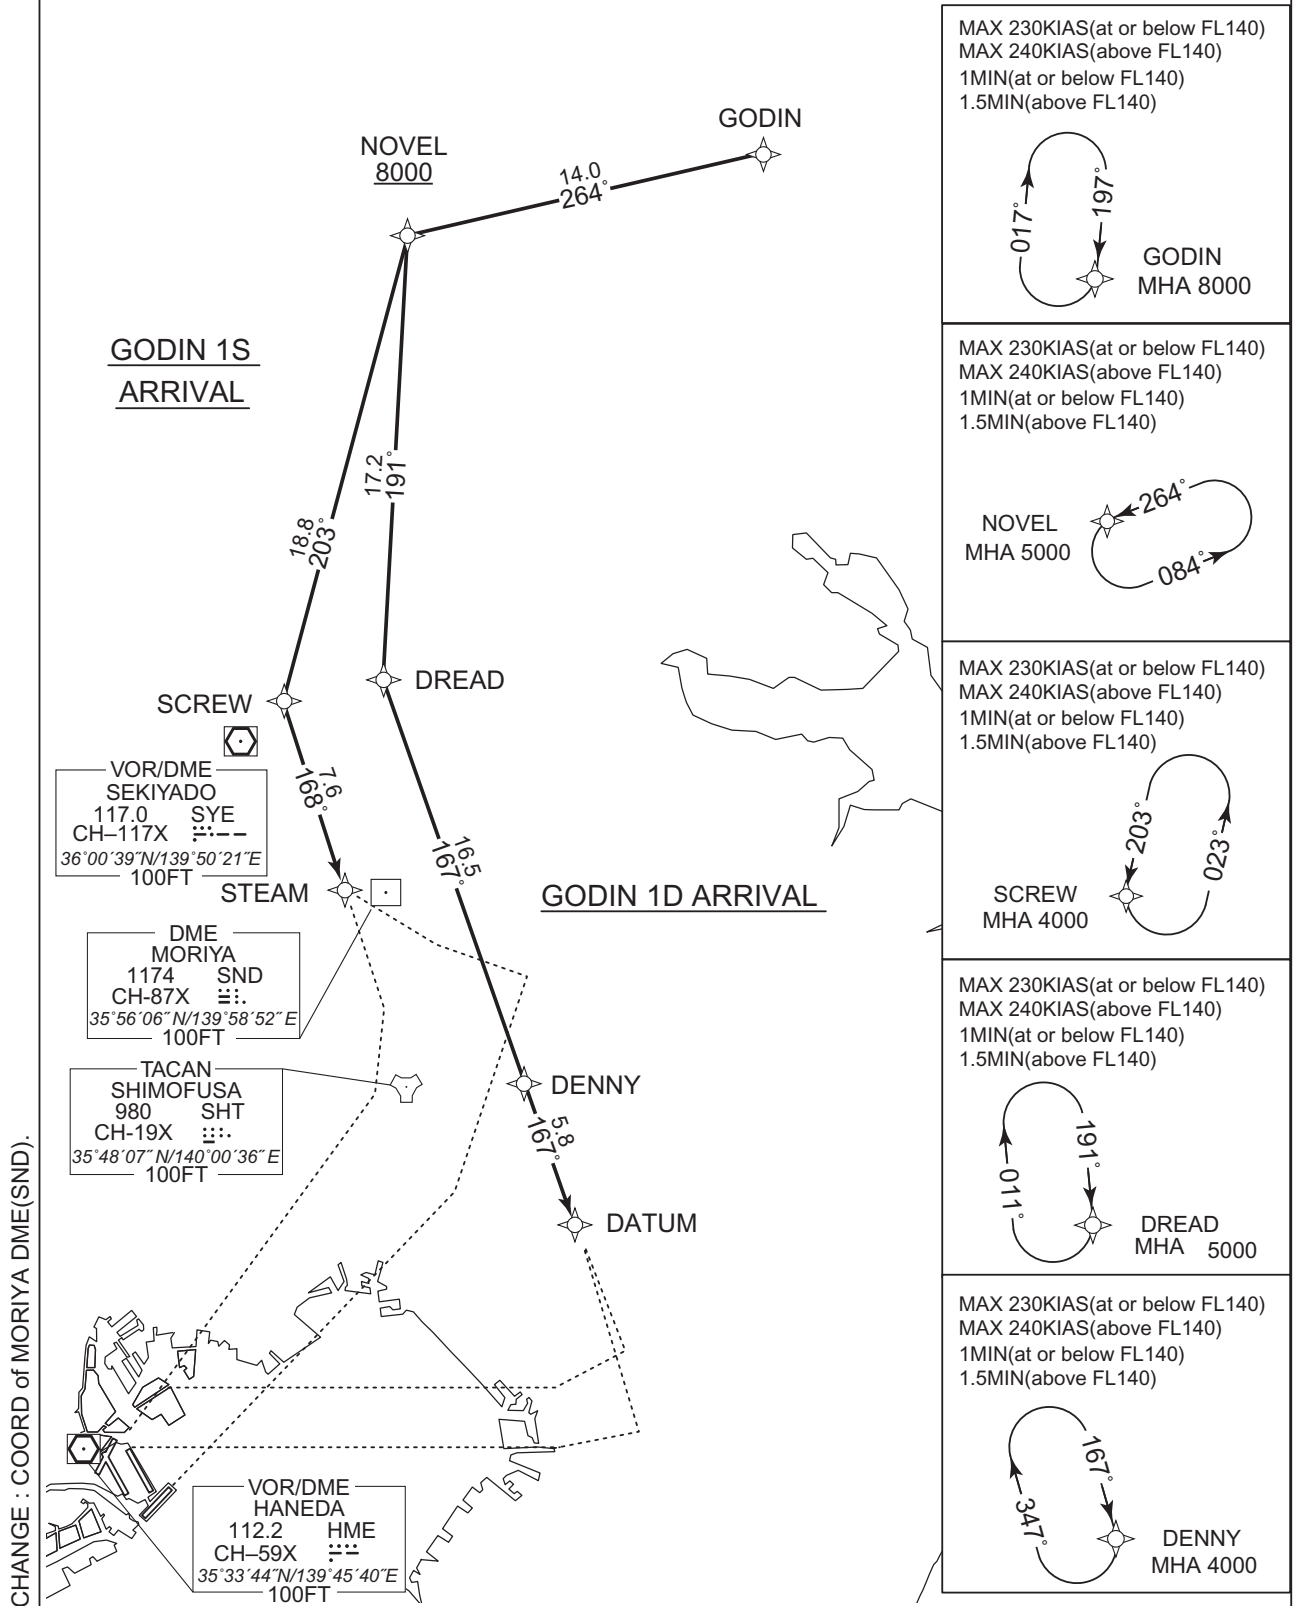

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

GODIN 1S ARRIVAL

From GODIN, to NOVEL at or above 8000FT, to SCREW, to STEAM.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	+8000	-	-	RNAV1
003	TF	SCREW	-	203 (195.2)	-7.5	18.8	-	-	-	-	RNAV1
004	TF	STEAM	-	168 (160.4)	-7.5	7.6	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SCREW	203 (195.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : Restriction on NOVEL

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

GODIN 1D ARRIVAL

From GODIN, to NOVEL at or above 8000FT, to DREAD, to DENNY, to DATUM.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	+8000	-	-	RNAV1
003	TF	DREAD	-	191 (183.1)	-7.5	17.2	-	-	-	-	RNAV1
004	TF	DENNY	-	167 (159.9)	-7.5	16.5	-	-	-	-	RNAV1
005	TF	DATUM	-	167 (160.0)	-7.5	5.8	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	DREAD	191 (183.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	DENNY	167 (159.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
DATUM	354259.6N / 1400824.3E	NOVEL	362106.9N / 1400004.9E
DENNY	354828.8N / 1400556.4E	SCREW	360301.2N / 1395400.4E
DREAD	360359.2N / 1395856.9E	STEAM	355553.3N / 1395708.4E
GODIN	362425.3N / 1401655.9E		

CHANGE : Restriction on NOVEL

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

POLIX 1S ARRIVAL  
POLIX 1D ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

VAR 8° W(2019)

POLIX 1S  
ARRIVAL

POLIX 1D  
ARRIVAL

CHANGE : COORD of MORIYA DME(SND).

VOR/DME  
SEKIYADO  
117.0 SYE  
CH-117X  
36°00'39"N/139°50'21"E  
100FT

DME  
MORIYA  
1174 SND  
CH-87X  
35°56'06"N/139°58'52"E  
100FT

TACAN  
SHIMOFUSA  
980 SHT  
CH-19X  
35°48'07"N/140°00'36"E  
100FT

VOR/DME  
HANEDA  
112.2 HME  
CH-59X  
35°33'44"N/139°45'40"E  
100FT

<p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140) 1MIN(at or below FL140) 1.5MIN(above FL140)</p> <p>SCREW MHA 4000</p>	<p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140) 1MIN(at or below FL140) 1.5MIN(above FL140)</p> <p>POLIX MHA 11000</p>
<p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140) 1MIN(at or below FL140) 1.5MIN(above FL140)</p> <p>DREAD MHA 5000</p>	<p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140) 1MIN(at or below FL140) 1.5MIN(above FL140)</p> <p>GODIN MHA 8000</p>
<p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140) 1MIN(at or below FL140) 1.5MIN(above FL140)</p> <p>DENNY MHA 4000</p>	<p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140) 1MIN(at or below FL140) 1.5MIN(above FL140)</p> <p>NOVEL MHA 5000</p>

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

POLIX 1S ARRIVAL

From POLIX at FL150, to GODIN, to NOVEL at or above 8000FT, to SCREW, to STEAM.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	GODIN	-	335 (327.2)	-7.5	14.1	-	-	-	-	RNAV1
003	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	+8000	-	-	RNAV1
004	TF	SCREW	-	203 (195.2)	-7.5	18.8	-	-	-	-	RNAV1
005	TF	STEAM	-	168 (160.4)	-7.5	7.6	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SCREW	203 (195.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : Restriction on NOVEL



STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

POLIX 1D ARRIVAL

From POLIX at FL150, to GODIN, to NOVEL at or above 8000FT, to DREAD, to DENNY, to DATUM.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	GODIN	-	335 (327.2)	-7.5	14.1	-	-	-	-	RNAV1
003	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	+8000	-	-	RNAV1
004	TF	DREAD	-	191 (183.1)	-7.5	17.2	-	-	-	-	RNAV1
005	TF	DENNY	-	167 (159.9)	-7.5	16.5	-	-	-	-	RNAV1
006	TF	DATUM	-	167 (160.0)	-7.5	5.8	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	DREAD	191 (183.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	DENNY	167 (159.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
DATUM	354259.6N / 1400824.3E	NOVEL	362106.9N / 1400004.9E
DENNY	354828.8N / 1400556.4E	POLIX	361237.1N / 1402622.5E
DREAD	360359.2N / 1395856.9E	SCREW	360301.2N / 1395400.4E
GODIN	362425.3N / 1401655.9E	STEAM	355553.3N / 1395708.4E

CHANGE : Restriction on NOVEL

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

OSHIMA L ARRIVAL  
OSHIMA R ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

VAR 8° W(2019)

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

VOR/DME  
HANEDA  
112.2 HME  
CH-59X  
35°33'44"N/139°45'40"E  
100FT

CHANGE : ACORN, T6L60 abolished. ANZAC, SACHS established.

OSHIMA R ARRIVAL

OSHIMA L ARRIVAL

OSHIMA L ARRIVAL

OSHIMA R ARRIVAL

OSHIMA (XAC)

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

OSHIMA L ARRIVAL

From XAC, to ANZAC, to SOLAR at 13000FT, to SCOUT, to TT250, to TT251, to TT252, to STOCK at 13000FT, to SHAFT at 9000FT, to SNOKE, to SPINE, to SOPPY at or below 7000FT, to SNARE at 6000FT, to SACHS, to SANDY.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	ANZAC	-	068 (060.8)	-7.5	15.9	-	-	-	-	RNAV1
003	TF	SOLAR	-	026 (018.4)	-7.5	9.1	-	13000	230	-	RNAV1
004	TF	SCOUT	-	052 (044.3)	-7.5	10.1	-	-	-	-	RNAV1
005	TF	TT250	-	131 (123.1)	-7.5	9.0	-	-	-	-	RNAV1
006	TF	TT251	-	110 (102.5)	-7.5	7.1	-	-	-	-	RNAV1
007	TF	TT252	-	092 (084.3)	-7.5	7.1	-	-	-	-	RNAV1
008	TF	STOCK	-	071 (063.6)	-7.5	9.0	-	13000	230	-	RNAV1
009	TF	SHAFT	-	330 (322.4)	-7.5	22.5	-	9000	-	-	RNAV1
010	TF	SNOKE	-	011 (003.4)	-7.5	13.4	-	-	-	-	RNAV1
011	TF	SPINE	-	348 (340.6)	-7.5	6.8	-	-	-	-	RNAV1
012	TF	SOPPY	-	297 (289.2)	-7.5	8.4	-	-7000	-	-	RNAV1
013	TF	SNARE	-	297 (289.1)	-7.5	7.8	-	6000	-	-	RNAV1
014	TF	SACHS	-	297 (289.0)	-7.5	3.4	-	-	-	-	RNAV1
015	TF	SANDY	-	288 (280.0)	-7.5	3.8	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : ACORN, T6L60 abolished. ANZAC, SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

OSHIMA R ARRIVAL

From XAC, to ANZAC, to SOLAR, to SCOUT, to SCOPE at 10000FT, to T6R70, to NUMAN at 9000FT, to NORIK, to T6R71, to T6R72, to NURSE at 9000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	ANZAC	-	068 (060.8)	-7.5	15.9	-	-	-	-	RNAV1
003	TF	SOLAR	-	026 (018.4)	-7.5	9.1	-	-	230	-	RNAV1
004	TF	SCOUT	-	052 (044.3)	-7.5	10.1	-	-	-	-	RNAV1
005	TF	SCOPE	-	036 (028.5)	-7.5	20.0	-	10000	-	-	RNAV1
006	TF	T6R70	-	036 (028.6)	-7.5	14.0	-	-	-	-	RNAV1
007	TF	NUMAN	-	360 (352.5)	-7.5	11.1	-	9000	210	-	RNAV1
008	TF	NORIK	-	360 (352.5)	-7.5	7.3	-	-	-	-	RNAV1
009	TF	T6R71	-	006 (358.9)	-7.5	6.5	-	-	-	-	RNAV1
010	TF	T6R72	-	342 (334.4)	-7.5	5.0	-	-	-	-	RNAV1
011	TF	NURSE	-	317 (309.8)	-7.5	6.5	-	9000	210	-	RNAV1
012	TF	NEURO	-	213 (205.5)	-7.5	13.5	-	6000	-	-	RNAV1
013	TF	NIGEL	-	252 (244.1)	-7.5	3.1	-	6000	-	-	RNAV1
014	TF	NATTY	-	252 (244.1)	-7.5	5.2	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	290 (282.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : ACORN abolished. ANZAC established.

## STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ANZAC	345028.8N / 1394146.7E	SNOKE	353551.6N / 1401411.7E
NATTY	355350.9N / 1394531.3E	SOLAR	345909.2N / 1394518.5E
NEURO	355727.6N / 1395441.3E	SOPPY	354458.8N / 1400140.3E
NIGEL	355607.5N / 1395117.8E	SPINE	354213.5N / 1401125.8E
NORIK	355428.9N / 1401054.5E	STOCK	350438.7N / 1403002.9E
NUMAN	354714.4N / 1401204.9E	T6R70	353614.4N / 1401351.4E
NURSE	360939.3N / 1400153.3E	T6R71	360059.5N / 1401045.1E
SACHS	354838.2N / 1394838.4E	T6R72	360530.2N / 1400804.3E
SANDY	354917.5N / 1394402.8E	TT250	350129.7N / 1400308.5E
SCOPE	352358.4N / 1400538.3E	TT251	345957.7N / 1401136.0E
SCOUT	350624.1N / 1395356.8E	TT252	350039.9N / 1402013.0E
SHAFT	352227.4N / 1401313.3E	XAC	344244.1N / 1392450.5E
SNARE	354731.1N / 1395238.1E		

CHANGE : ACORN, T6L60 abolished. ANZAC, SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AKSEL L ARRIVAL  
AKSEL R ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

VAR 8° W(2019)


MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

SNARE  
MHA 4000



MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

NUMAN  
MHA 4000




MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

SPINE  
MHA 4000




MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

NEURO  
MHA 4000



MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

SHAFT  
MHA 4000



VOR/DME  
HANEDA  
112.2 HME  
CH-59X  
35°33'44"N/139°45'40"E  
100FT

AKSEL R ARRIVAL

AKSEL L ARRIVAL




AKSEL L ARRIVAL

AKSEL R ARRIVAL

CHANGE : T6L60 abolished. SACHS established.

MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

AKSEL  
MHA 5000

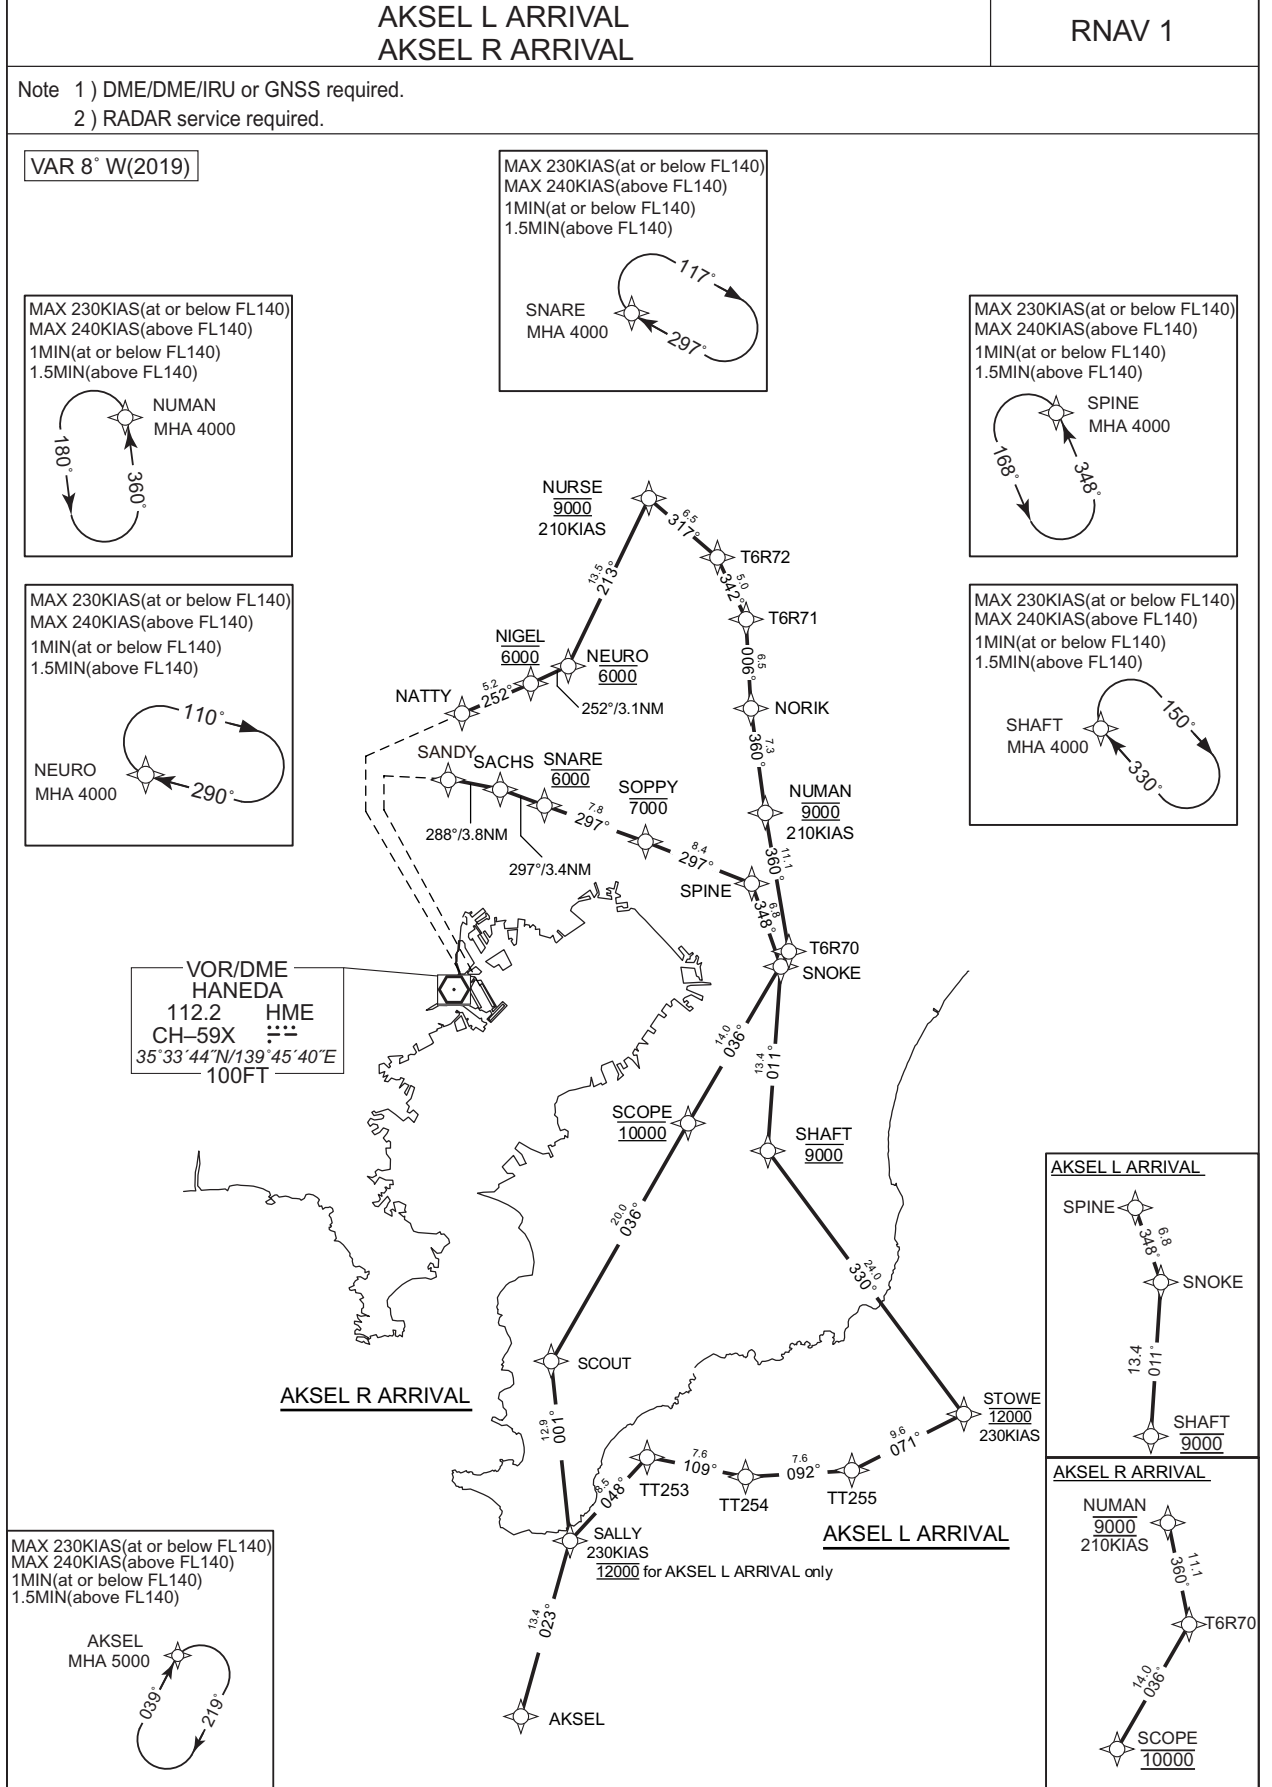

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AKSEL L ARRIVAL

From AKSEL, to SALLY at 12000FT, to TT253, to TT254, to TT255, to STOWE at 12000FT, to SHAFT at 9000FT, to SNOKE, to SPINE, to SOPPY at or below 7000FT, to SNARE at 6000FT, to SACHS, to SANDY.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	SALLY	-	023 (015.0)	-7.5	13.4	-	12000	230	-	RNAV1
003	TF	TT253	-	048 (040.5)	-7.5	8.5	-	-	-	-	RNAV1
004	TF	TT254	-	109 (102.0)	-7.5	7.6	-	-	-	-	RNAV1
005	TF	TT255	-	092 (084.4)	-7.5	7.6	-	-	-	-	RNAV1
006	TF	STOWE	-	071 (063.6)	-7.5	9.6	-	12000	230	-	RNAV1
007	TF	SHAFT	-	330 (322.4)	-7.5	24.0	-	9000	-	-	RNAV1
008	TF	SNOKE	-	011 (003.4)	-7.5	13.4	-	-	-	-	RNAV1
009	TF	SPINE	-	348 (340.6)	-7.5	6.8	-	-	-	-	RNAV1
010	TF	SOPPY	-	297 (289.2)	-7.5	8.4	-	-7000	-	-	RNAV1
011	TF	SNARE	-	297 (289.1)	-7.5	7.8	-	6000	-	-	RNAV1
012	TF	SACHS	-	297 (289.0)	-7.5	3.4	-	-	-	-	RNAV1
013	TF	SANDY	-	288 (280.0)	-7.5	3.8	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AKSEL R ARRIVAL

From AKSEL, to SALLY, to SCOUT, to SCOPE at 10000FT, to T6R70, to NUMAN at 9000FT, to NORIK, to T6R71, to T6R72, to NURSE at 9000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	SALLY	-	023 (015.0)	-7.5	13.4	-	-	230	-	RNAV1
003	TF	SCOUT	-	001 (353.7)	-7.5	12.9	-	-	-	-	RNAV1
004	TF	SCOPE	-	036 (028.5)	-7.5	20.0	-	10000	-	-	RNAV1
005	TF	T6R70	-	036 (028.6)	-7.5	14.0	-	-	-	-	RNAV1
006	TF	NUMAN	-	360 (352.5)	-7.5	11.1	-	9000	210	-	RNAV1
007	TF	NORIK	-	360 (352.5)	-7.5	7.3	-	-	-	-	RNAV1
008	TF	T6R71	-	006 (358.9)	-7.5	6.5	-	-	-	-	RNAV1
009	TF	T6R72	-	342 (334.4)	-7.5	5.0	-	-	-	-	RNAV1
010	TF	NURSE	-	317 (309.8)	-7.5	6.5	-	9000	210	-	RNAV1
011	TF	NEURO	-	213 (205.5)	-7.5	13.5	-	6000	-	-	RNAV1
012	TF	NIGEL	-	252 (244.1)	-7.5	3.1	-	6000	-	-	RNAV1
013	TF	NATTY	-	252 (244.1)	-7.5	5.2	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	290 (282.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : New PROC



## STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	SHAFT	352227.4N / 1401313.3E
NATTY	355350.9N / 1394531.3E	SNARE	354731.1N / 1395238.1E
NEURO	355727.6N / 1395441.3E	SNOKE	353551.6N / 1401411.7E
NIGEL	355607.5N / 1395117.8E	SOPPY	354458.8N / 1400140.3E
NORIK	355428.9N / 1401054.5E	SPINE	354213.5N / 1401125.8E
NUMAN	354714.4N / 1401204.9E	STOWE	350325.9N / 1403111.4E
NURSE	360939.3N / 1400153.3E	T6R70	353614.4N / 1401351.4E
SACHS	354838.2N / 1394838.4E	T6R71	360059.5N / 1401045.1E
SALLY	345333.9N / 1395540.1E	T6R72	360530.2N / 1400804.3E
SANDY	354917.5N / 1394402.8E	TT253	350001.4N / 1400224.6E
SCOPE	352358.4N / 1400538.3E	TT254	345826.5N / 1401129.4E
SCOUT	350624.1N / 1395356.8E	TT255	345910.9N / 1402041.4E

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

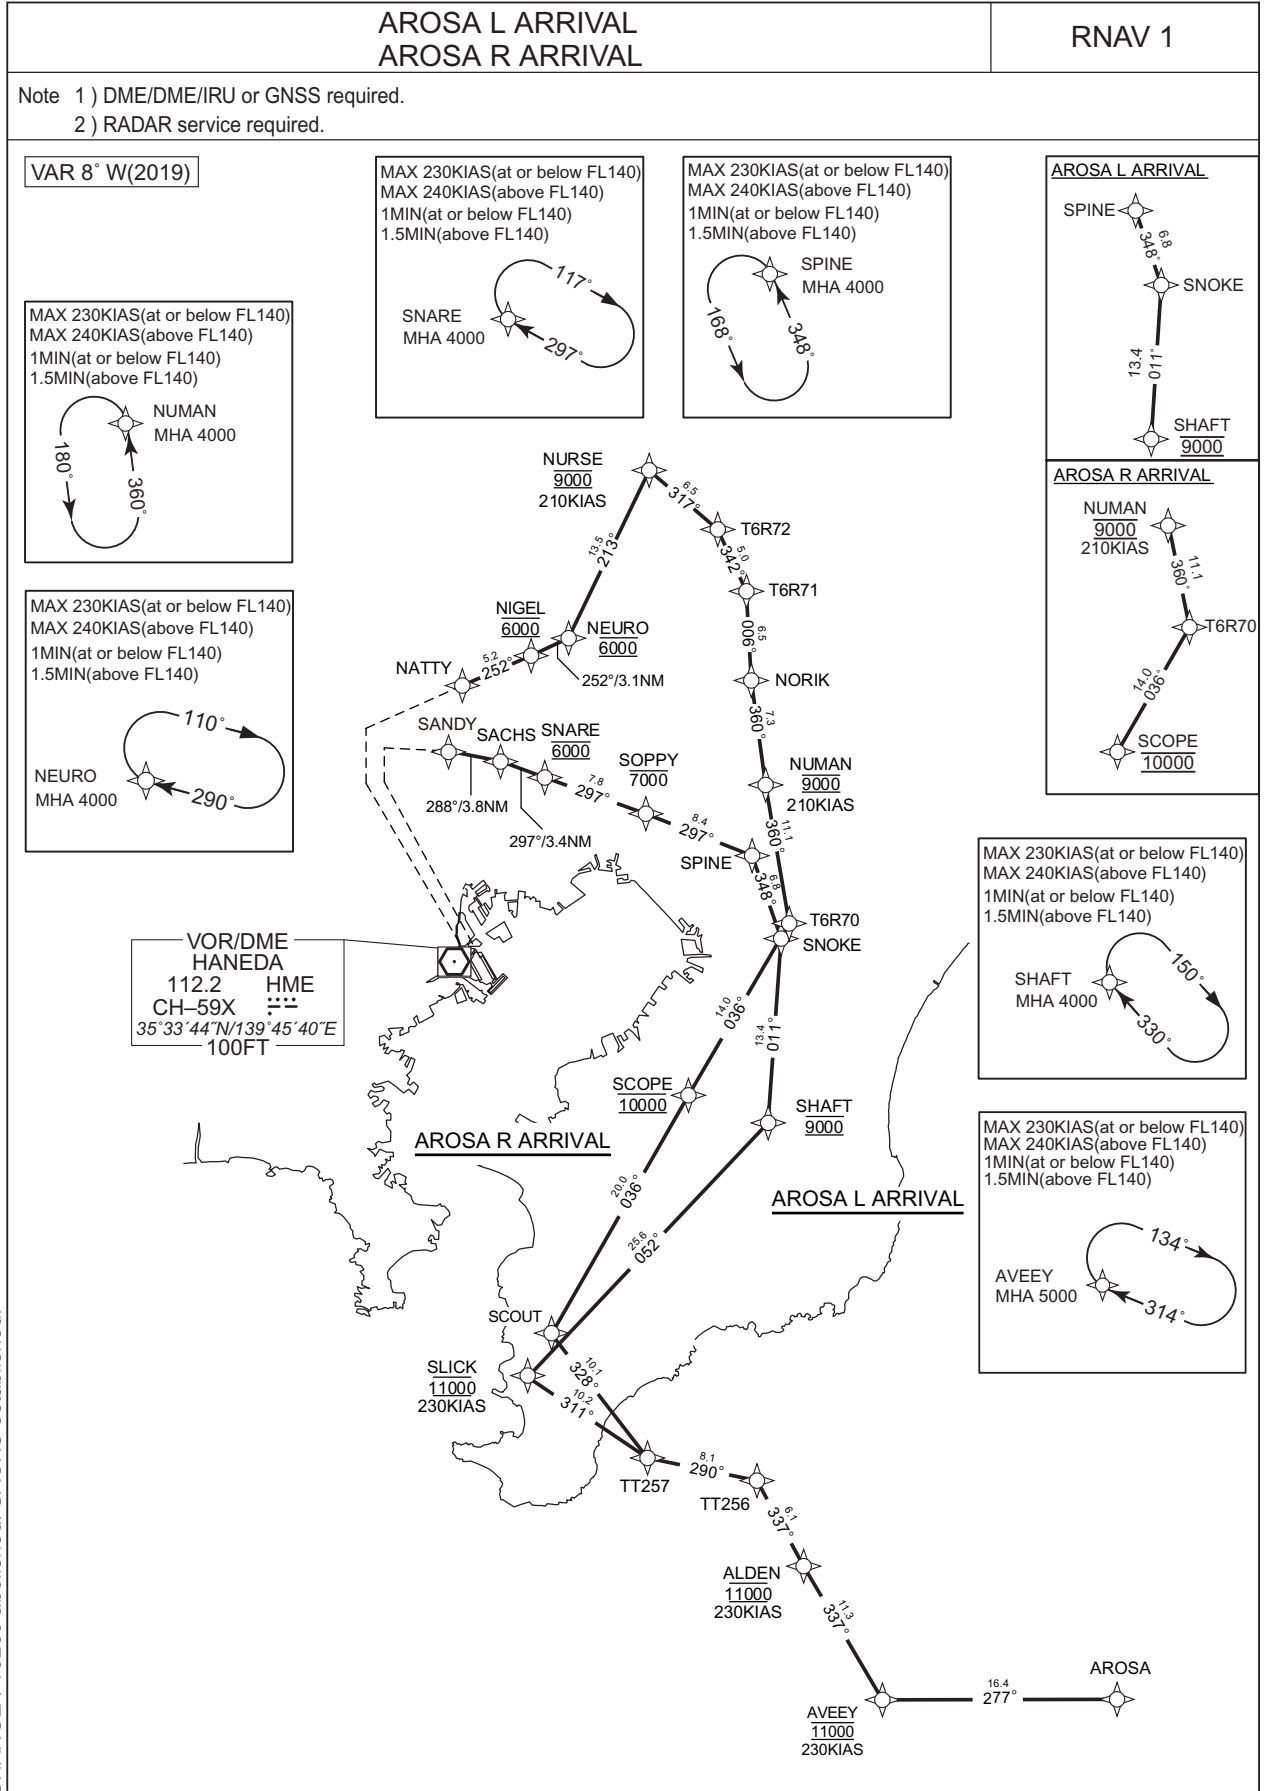

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AROSA L ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SLICK at 11000FT, to SHAFT at 9000FT, to SNOKE, to SPINE, to SOPPY at or below 7000FT, to SNARE at 6000FT, to SACHS, to SANDY.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	ALDEN	-	337 (330.0)	-7.5	11.3	-	11000	230	-	RNAV1
004	TF	TT256	-	337 (329.9)	-7.5	6.1	-	-	-	-	RNAV1
005	TF	TT257	-	290 (282.4)	-7.5	8.1	-	-	-	-	RNAV1
006	TF	SLICK	-	311 (303.1)	-7.5	10.2	-	11000	230	-	RNAV1
007	TF	SHAFT	-	052 (044.3)	-7.5	25.6	-	9000	-	-	RNAV1
008	TF	SNOKE	-	011 (003.4)	-7.5	13.4	-	-	-	-	RNAV1
009	TF	SPINE	-	348 (340.6)	-7.5	6.8	-	-	-	-	RNAV1
010	TF	SOPPY	-	297 (289.2)	-7.5	8.4	-	-7000	-	-	RNAV1
011	TF	SNARE	-	297 (289.1)	-7.5	7.8	-	6000	-	-	RNAV1
012	TF	SACHS	-	297 (289.0)	-7.5	3.4	-	-	-	-	RNAV1
013	TF	SANDY	-	288 (280.0)	-7.5	3.8	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AROSA R ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SCOUT, to SCOPE at 10000FT, to T6R70, to NUMAN at 9000FT, to NORIK, to T6R71, to T6R72, to NURSE at 9000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	ALDEN	-	337 (330.0)	-7.5	11.3	-	11000	230	-	RNAV1
004	TF	TT256	-	337 (329.9)	-7.5	6.1	-	-	-	-	RNAV1
005	TF	TT257	-	290 (282.4)	-7.5	8.1	-	-	-	-	RNAV1
006	TF	SCOUT	-	328 (320.5)	-7.5	10.1	-	-	-	-	RNAV1
007	TF	SCOPE	-	036 (028.5)	-7.5	20.0	-	10000	-	-	RNAV1
008	TF	T6R70	-	036 (028.6)	-7.5	14.0	-	-	-	-	RNAV1
009	TF	NUMAN	-	360 (352.5)	-7.5	11.1	-	9000	210	-	RNAV1
010	TF	NORIK	-	360 (352.5)	-7.5	7.3	-	-	-	-	RNAV1
011	TF	T6R71	-	006 (358.9)	-7.5	6.5	-	-	-	-	RNAV1
012	TF	T6R72	-	342 (334.4)	-7.5	5.0	-	-	-	-	RNAV1
013	TF	NURSE	-	317 (309.8)	-7.5	6.5	-	9000	210	-	RNAV1
014	TF	NEURO	-	213 (205.5)	-7.5	13.5	-	6000	-	-	RNAV1
015	TF	NIGEL	-	252 (244.1)	-7.5	3.1	-	6000	-	-	RNAV1
016	TF	NATTY	-	252 (244.1)	-7.5	5.2	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	290 (282.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : New PROC

## STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ALDEN	345141.1N / 1401505.3E	SCOUT	350624.1N / 1395356.8E
AROSA	344201.7N / 1404157.3E	SHAFT	352227.4N / 1401313.3E
AVEEY	344155.9N / 1402158.0E	SLICK	350412.7N / 1395120.0E
NATTY	355350.9N / 1394531.3E	SNARE	354731.1N / 1395238.1E
NEURO	355727.6N / 1395441.3E	SNOKE	353551.6N / 1401411.7E
NIGEL	355607.5N / 1395117.8E	SOPPY	354458.8N / 1400140.3E
NORIK	355428.9N / 1401054.5E	SPINE	354213.5N / 1401125.8E
NUMAN	354714.4N / 1401204.9E	T6R70	353614.4N / 1401351.4E
NURSE	360939.3N / 1400153.3E	T6R71	360059.5N / 1401045.1E
SACHS	354838.2N / 1394838.4E	T6R72	360530.2N / 1400804.3E
SANDY	354917.5N / 1394402.8E	TT256	345655.4N / 1401122.9E
SCOPE	352358.4N / 1400538.3E	TT257	345838.5N / 1400146.6E

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL






RNAV STAR RWY16L/16R

GODIN L ARRIVAL  
GODIN R ARRIVAL

RNAV 1

Note 1 ) DME/DME/IRU or GNSS required.  
2 ) RADAR service required.

VAR 8° W(2019)

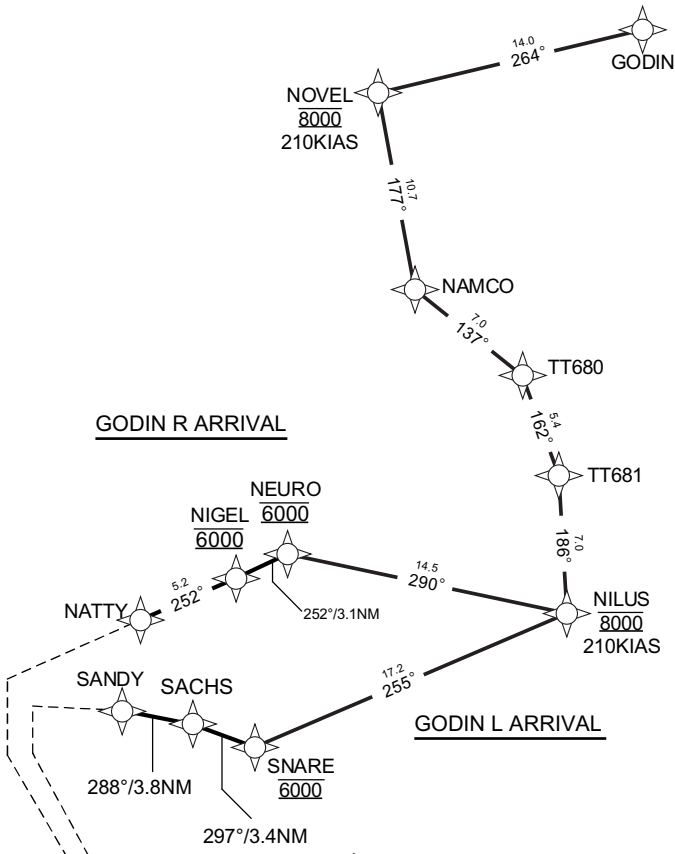

VOR/DME  
HANEDA  
112.2 HME  
CH-59X  
35°33'44"N/139°45'40"E  
100FT

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

GODIN L ARRIVAL

From GODIN, to NOVEL at 8000FT, to NAMCO, to TT680, to TT681, to NILUS at 8000FT, to SNARE at 6000FT, to SACHS, to SANDY.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	8000	210	-	RNAV1
003	TF	NAMCO	-	177 (169.8)	-7.5	10.7	-	-	-	-	RNAV1
004	TF	TT680	-	137 (129.7)	-7.5	7.0	-	-	-	-	RNAV1
005	TF	TT681	-	162 (154.3)	-7.5	5.4	-	-	-	-	RNAV1
006	TF	NILUS	-	186 (178.9)	-7.5	7.0	-	8000	210	-	RNAV1
007	TF	SNARE	-	255 (247.0)	-7.5	17.2	-	6000	-	-	RNAV1
008	TF	SACHS	-	297 (289.0)	-7.5	3.4	-	-	-	-	RNAV1
009	TF	SANDY	-	288 (280.0)	-7.5	3.8	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

GODIN R ARRIVAL

From GODIN, to NOVEL at 8000FT, to NAMCO, to TT680, to TT681, to NILUS at 8000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	8000	210	-	RNAV1
003	TF	NAMCO	-	177 (169.8)	-7.5	10.7	-	-	-	-	RNAV1
004	TF	TT680	-	137 (129.7)	-7.5	7.0	-	-	-	-	RNAV1
005	TF	TT681	-	162 (154.3)	-7.5	5.4	-	-	-	-	RNAV1
006	TF	NILUS	-	186 (178.9)	-7.5	7.0	-	8000	210	-	RNAV1
007	TF	NEURO	-	290 (282.9)	-7.5	14.5	-	6000	-	-	RNAV1
008	TF	NIGEL	-	252 (244.1)	-7.5	3.1	-	6000	-	-	RNAV1
009	TF	NATTY	-	252 (244.1)	-7.5	5.2	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	290 (282.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : New PROC



## STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
GODIN	362425.3N / 1401655.9E	NOVEL	362106.9N / 1400004.9E
NAMCO	361035.1N / 1400226.3E	SACHS	354838.2N / 1394838.4E
NATTY	355350.9N / 1394531.3E	SANDY	354917.5N / 1394402.8E
NEURO	355727.6N / 1395441.3E	SNARE	354731.1N / 1395238.1E
NIGEL	355607.5N / 1395117.8E	TT680	360608.2N / 1400904.0E
NILUS	355415.2N / 1401208.8E	TT681	360113.8N / 1401158.7E

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

POLIX L ARRIVAL  
POLIX R ARRIVAL

RNAV 1


Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

VAR 8° W(2019)


MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)





MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)  
MAX 240KIAS(above FL140)  
1MIN(at or below FL140)  
1.5MIN(above FL140)

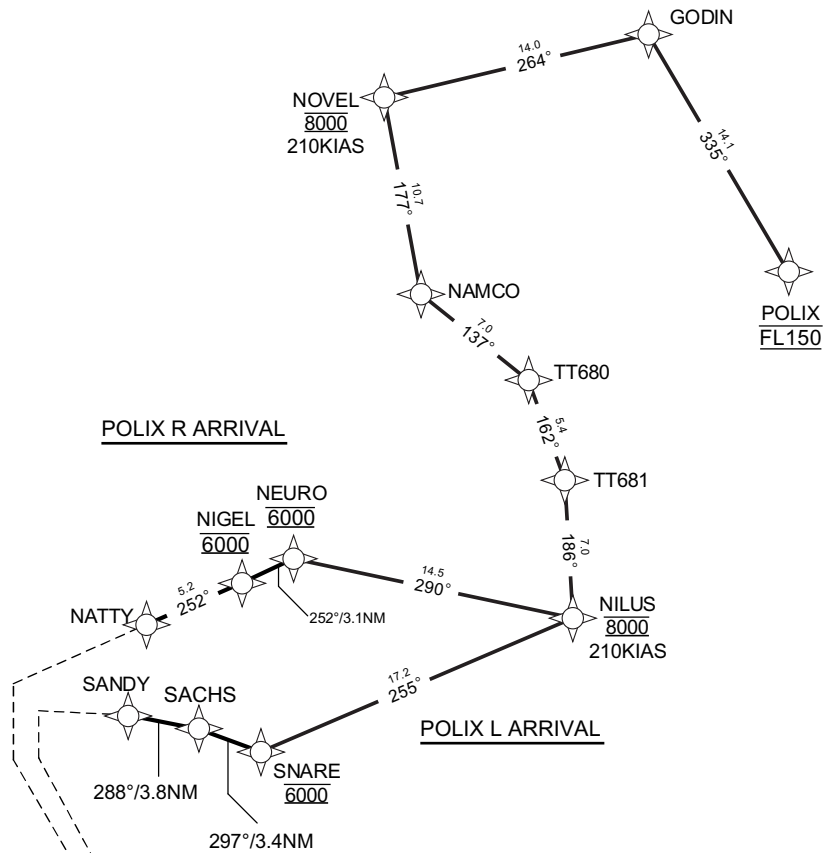

VOR/DME  
HANEDA  
112.2 HME  
CH-59X  
35°33'44"N/139°45'40"E  
100FT

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

POLIX L ARRIVAL

From POLIX at FL150, to GODIN, to NOVEL at 8000FT, to NAMCO, to TT680, to TT681, to NILUS at 8000FT, to SNARE at 6000FT, to SACHS, to SANDY.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	GODIN	-	335 (327.2)	-7.5	14.1	-	-	-	-	RNAV1
003	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	8000	210	-	RNAV1
004	TF	NAMCO	-	177 (169.8)	-7.5	10.7	-	-	-	-	RNAV1
005	TF	TT680	-	137 (129.7)	-7.5	7.0	-	-	-	-	RNAV1
006	TF	TT681	-	162 (154.3)	-7.5	5.4	-	-	-	-	RNAV1
007	TF	NILUS	-	186 (178.9)	-7.5	7.0	-	8000	210	-	RNAV1
008	TF	SNARE	-	255 (247.0)	-7.5	17.2	-	6000	-	-	RNAV1
009	TF	SACHS	-	297 (289.0)	-7.5	3.4	-	-	-	-	RNAV1
010	TF	SANDY	-	288 (280.0)	-7.5	3.8	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

POLIX R ARRIVAL

From POLIX at FL150, to GODIN, to NOVEL at 8000FT, to NAMCO, to TT680, to TT681, to NILUS at 8000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	GODIN	-	335 (327.2)	-7.5	14.1	-	-	-	-	RNAV1
003	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	8000	210	-	RNAV1
004	TF	NAMCO	-	177 (169.8)	-7.5	10.7	-	-	-	-	RNAV1
005	TF	TT680	-	137 (129.7)	-7.5	7.0	-	-	-	-	RNAV1
006	TF	TT681	-	162 (154.3)	-7.5	5.4	-	-	-	-	RNAV1
007	TF	NILUS	-	186 (178.9)	-7.5	7.0	-	8000	210	-	RNAV1
008	TF	NEURO	-	290 (282.9)	-7.5	14.5	-	6000	-	-	RNAV1
009	TF	NIGEL	-	252 (244.1)	-7.5	3.1	-	6000	-	-	RNAV1
010	TF	NATTY	-	252 (244.1)	-7.5	5.2	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	290 (282.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL


RNAV STAR RWY16L/16R

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
GODIN	362425.3N / 1401655.9E	POLIX	361237.1N / 1402622.5E
NAMCO	361035.1N / 1400226.3E	SACHS	354838.2N / 1394838.4E
NATTY	355350.9N / 1394531.3E	SANDY	354917.5N / 1394402.8E
NEURO	355727.6N / 1395441.3E	SNARE	354731.1N / 1395238.1E
NIGEL	355607.5N / 1395117.8E	TT680	360608.2N / 1400904.0E
NILUS	355415.2N / 1401208.8E	TT681	360113.8N / 1401158.7E
NOVEL	362106.9N / 1400004.9E		

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

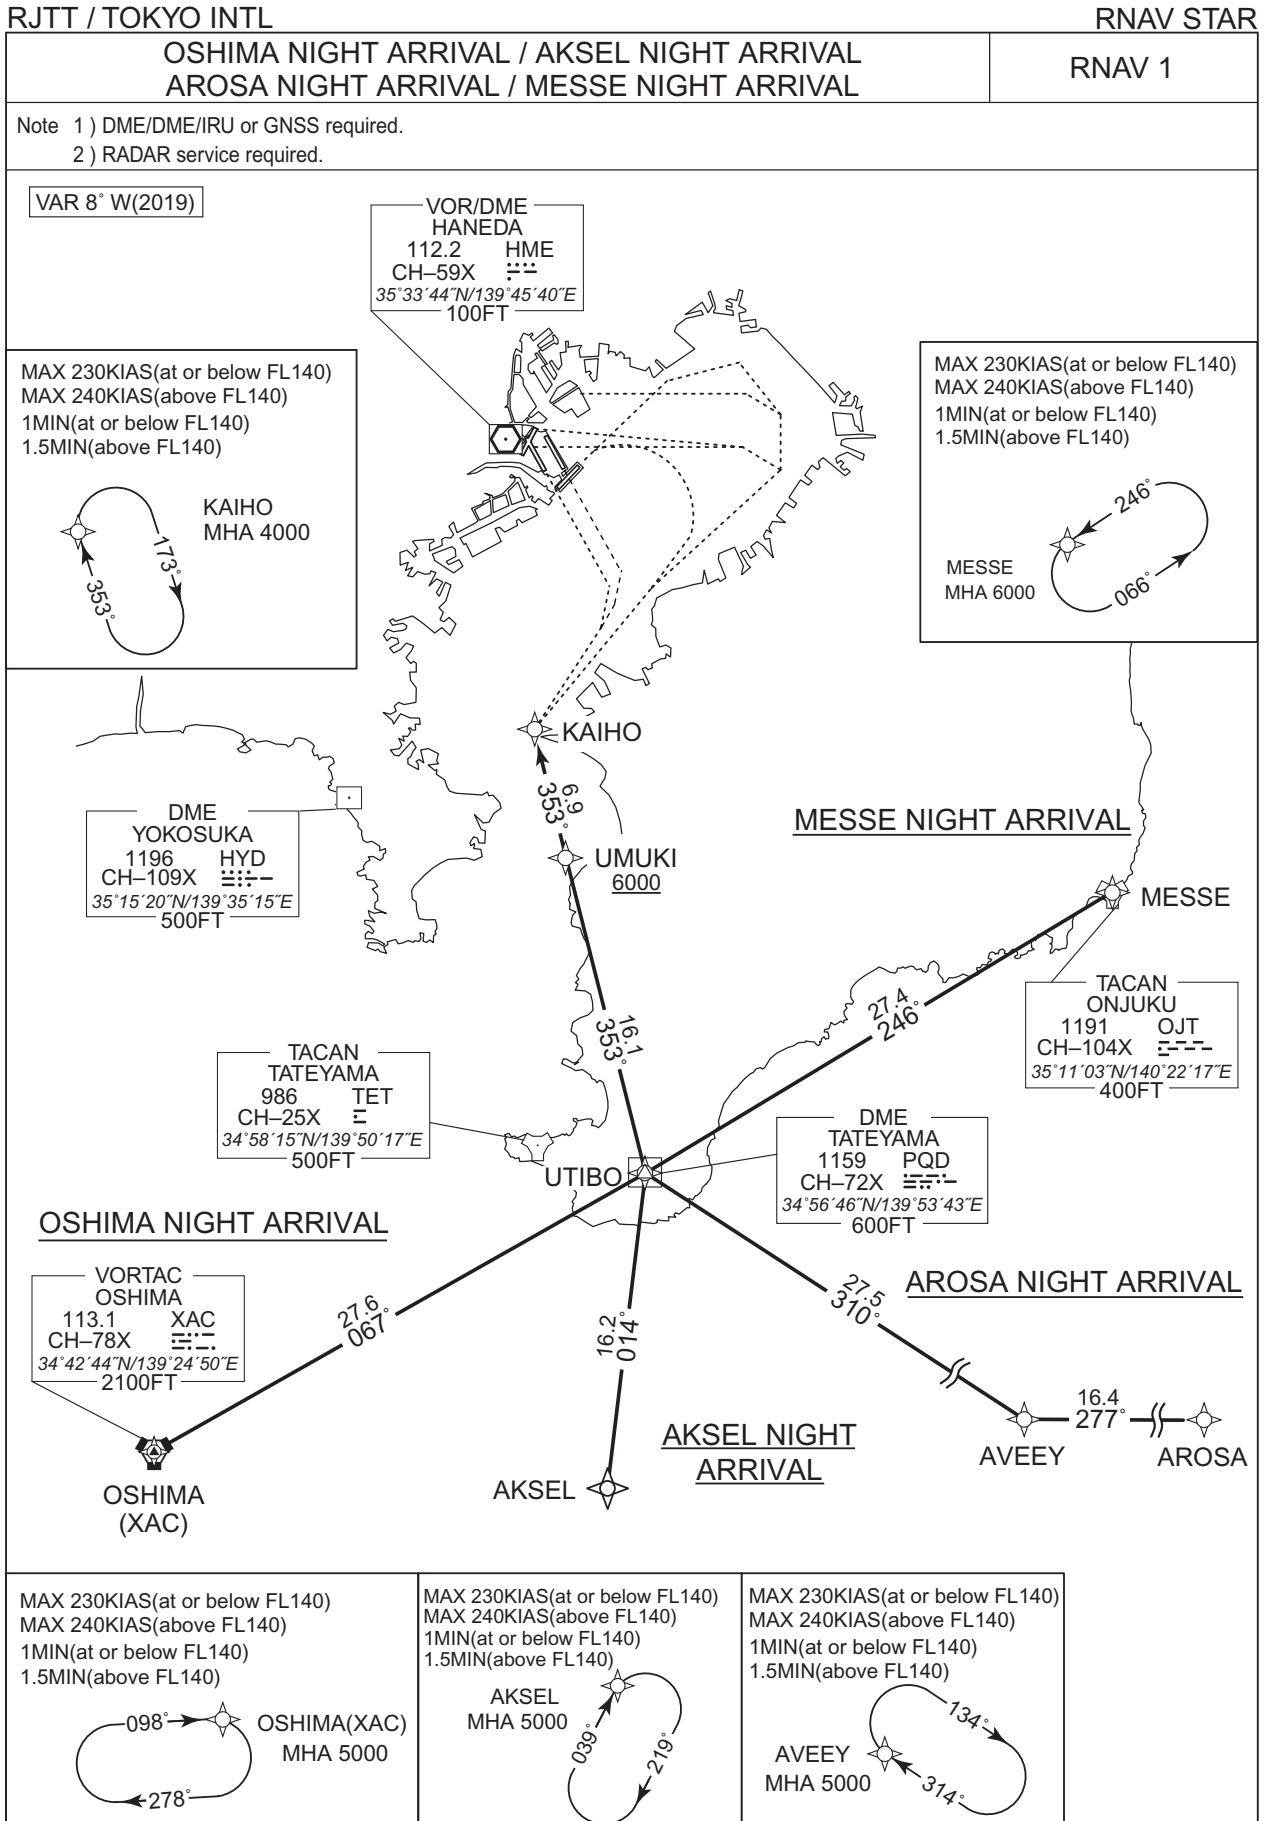

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

OSHIMA NIGHT ARRIVAL

From XAC, to UTIBO, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	067 (059.2)	-7.5	27.6	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

AKSEL NIGHT ARRIVAL

From AKSEL, to UTIBO, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	014 (006.6)	-7.5	16.2	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1



STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

AROSA NIGHT ARRIVAL

From AROSA, to AVEEY, to UTIBO, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	-	-	-	RNAV1
003	TF	UTIBO	-	310 (302.8)	-7.5	27.5	-	-	-	-	RNAV1
004	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
005	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

MESSE NIGHT ARRIVAL

From MESSE, to UTIBO, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MESSE	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	246 (238.8)	-7.5	27.4	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	MESSE	246 (238.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	6000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1


Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	MESSE	351100.8N / 1402214.7E
AROSA	344201.7N / 1404157.3E	UMUKI	351219.1N / 1394849.2E
AVEEY	344155.9N / 1402158.0E	UTIBO	345647.0N / 1395343.9E
KAIHO	351857.8N / 1394642.4E	XAC	344244.1N / 1392450.5E

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

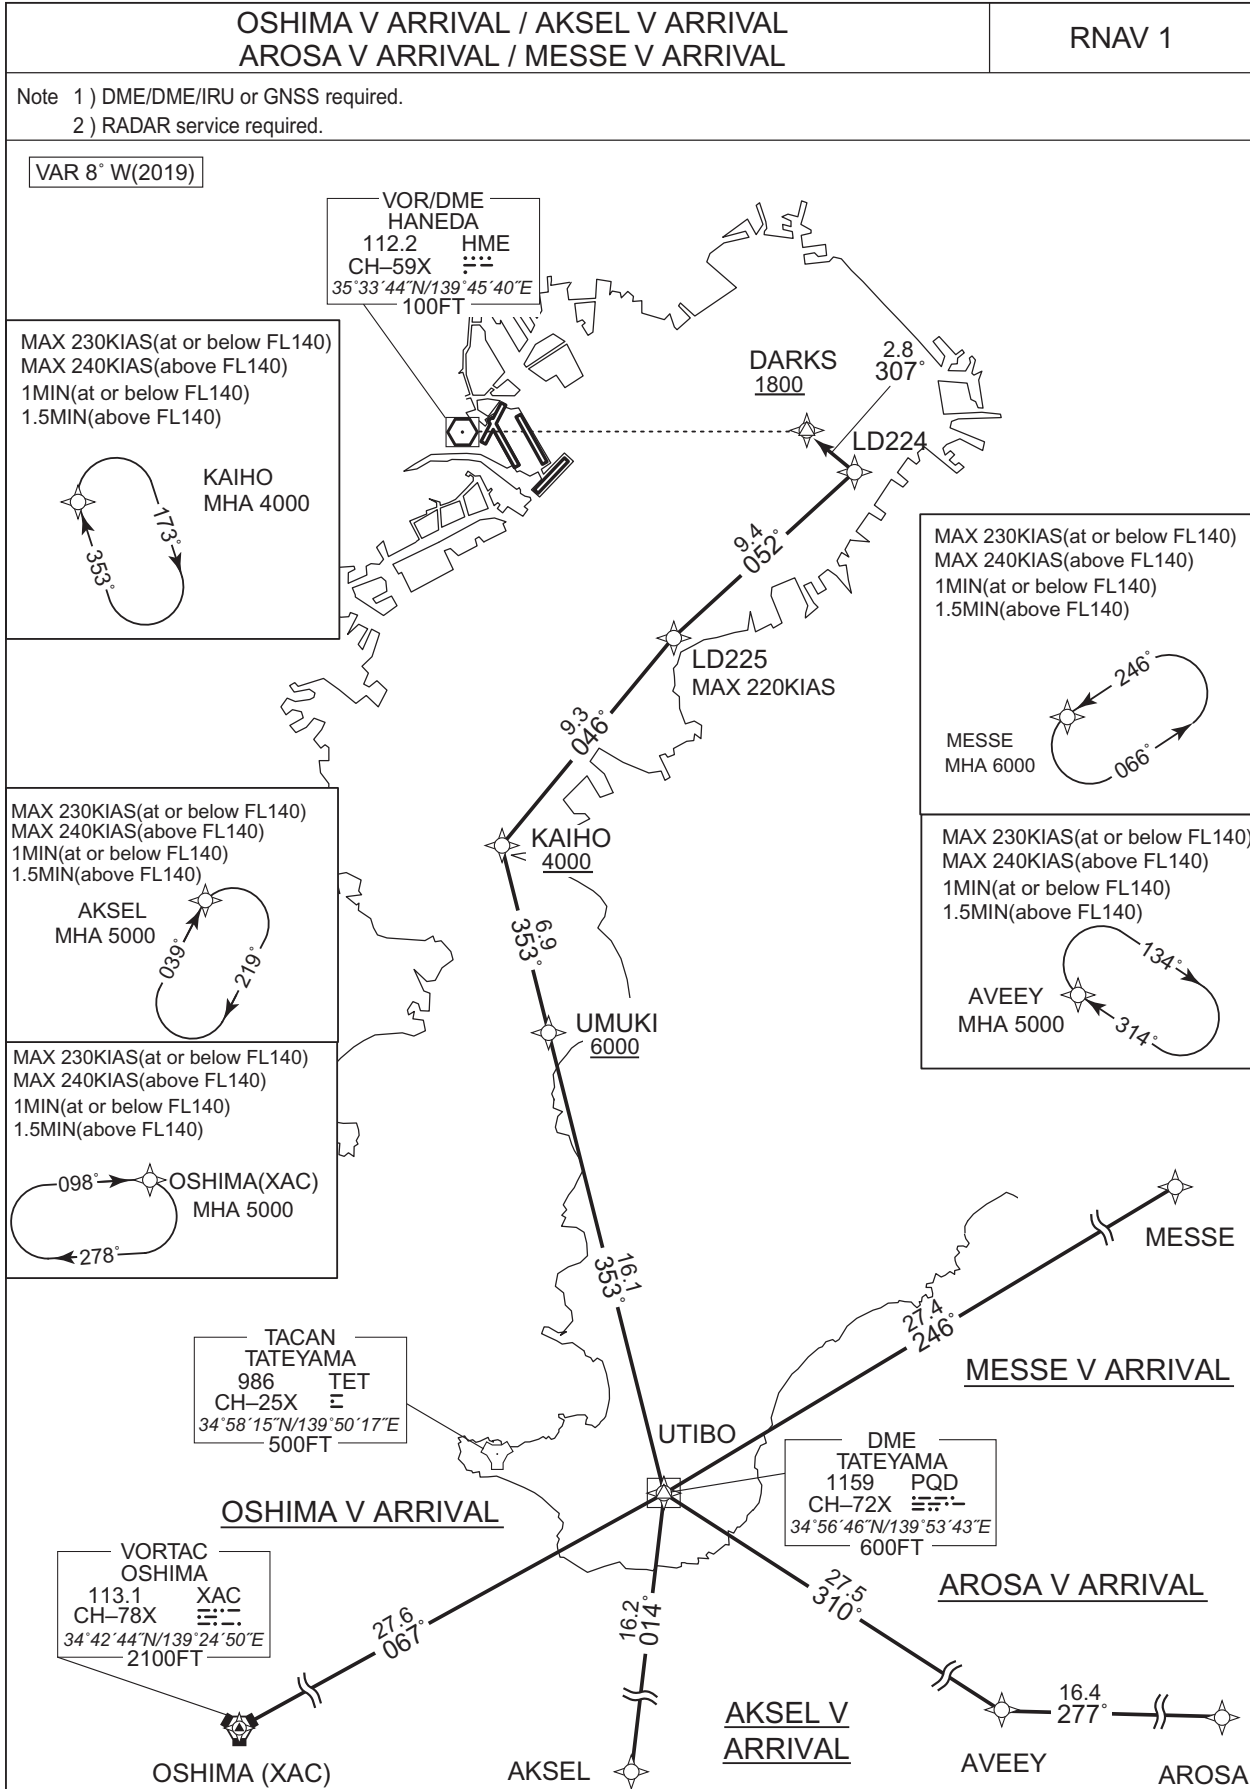

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

OSHIMA V ARRIVAL

From XAC, to UTIBO, to UMUKI at or above 6000FT, to KAIHO at or above 4000FT, to LD225, to LD224, to DARKS at or above 1800FT.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAV AIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	067 (059.2)	-7.5	27.6	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	+4000	-	-	RNAV1
005	TF	LD225	-	046 (038.9)	-7.5	9.3	-	-	-220	-	RNAV1
006	TF	LD224	-	052 (044.9)	-7.5	9.4	-	-	-	-	RNAV1
007	TF	DARKS	-	307 (299.7)	-7.5	2.8	-	+1800	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

## STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

AKSEL V ARRIVAL

From AKSEL, to UTIBO, to UMUKI at or above 6000FT, to KAIHO at or above 4000FT, to LD225, to LD224, to DARKS at or above 1800FT.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	014 (006.6)	-7.5	16.2	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	+4000	-	-	RNAV1
005	TF	LD225	-	046 (038.9)	-7.5	9.3	-	-	-220	-	RNAV1
006	TF	LD224	-	052 (044.9)	-7.5	9.4	-	-	-	-	RNAV1
007	TF	DARKS	-	307 (299.7)	-7.5	2.8	-	+1800	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

AROSA V ARRIVAL

From AROSA, to AVEEY, to UTIBO, to UMUKI at or above 6000FT, to KAIHO at or above 4000FT, to LD225, to LD224, to DARKS at or above 1800FT.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	-	-	-	RNAV1
003	TF	UTIBO	-	310 (302.8)	-7.5	27.5	-	-	-	-	RNAV1
004	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
005	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	+4000	-	-	RNAV1
006	TF	LD225	-	046 (038.9)	-7.5	9.3	-	-	-220	-	RNAV1
007	TF	LD224	-	052 (044.9)	-7.5	9.4	-	-	-	-	RNAV1
008	TF	DARKS	-	307 (299.7)	-7.5	2.8	-	+1800	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

MESSE V ARRIVAL

From MESSE, to UTIBO, to UMUKI at or above 6000FT, to KAIHO at or above 4000FT, to LD225, to LD224, to DARKS at or above 1800FT.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MESSE	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	246 (238.8)	-7.5	27.4	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	+4000	-	-	RNAV1
005	TF	LD225	-	046 (038.9)	-7.5	9.3	-	-	-220	-	RNAV1
006	TF	LD224	-	052 (044.9)	-7.5	9.4	-	-	-	-	RNAV1
007	TF	DARKS	-	307 (299.7)	-7.5	2.8	-	+1800	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	MESSE	246 (238.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	6000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	LD225	352614.1N / 1395353.4E
AROSA	344201.7N / 1404157.3E	MESSE	351100.8N / 1402214.7E
AVEEY	344155.9N / 1402158.0E	UMUKI	351219.1N / 1394849.2E
DARKS	353414.8N / 1395902.9E	UTIBO	345647.0N / 1395343.9E
KAIHO	351857.8N / 1394642.4E	XAC	344244.1N / 1392450.5E
LD224	353252.5N / 1400200.0E		



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS Z RWY34L

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 111.7 IHA ILS-GP 333.5 ILS-DME CH-54X	TOKYO TOWER 118.1 - 124.35 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

Simultaneous approach authorized with RWY34R

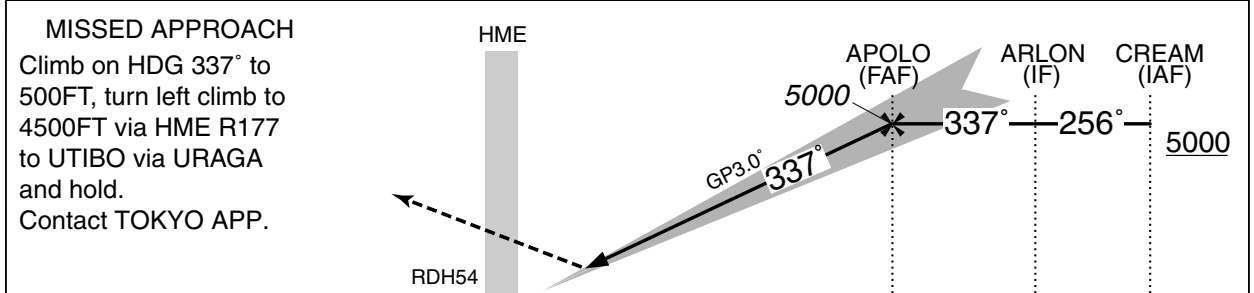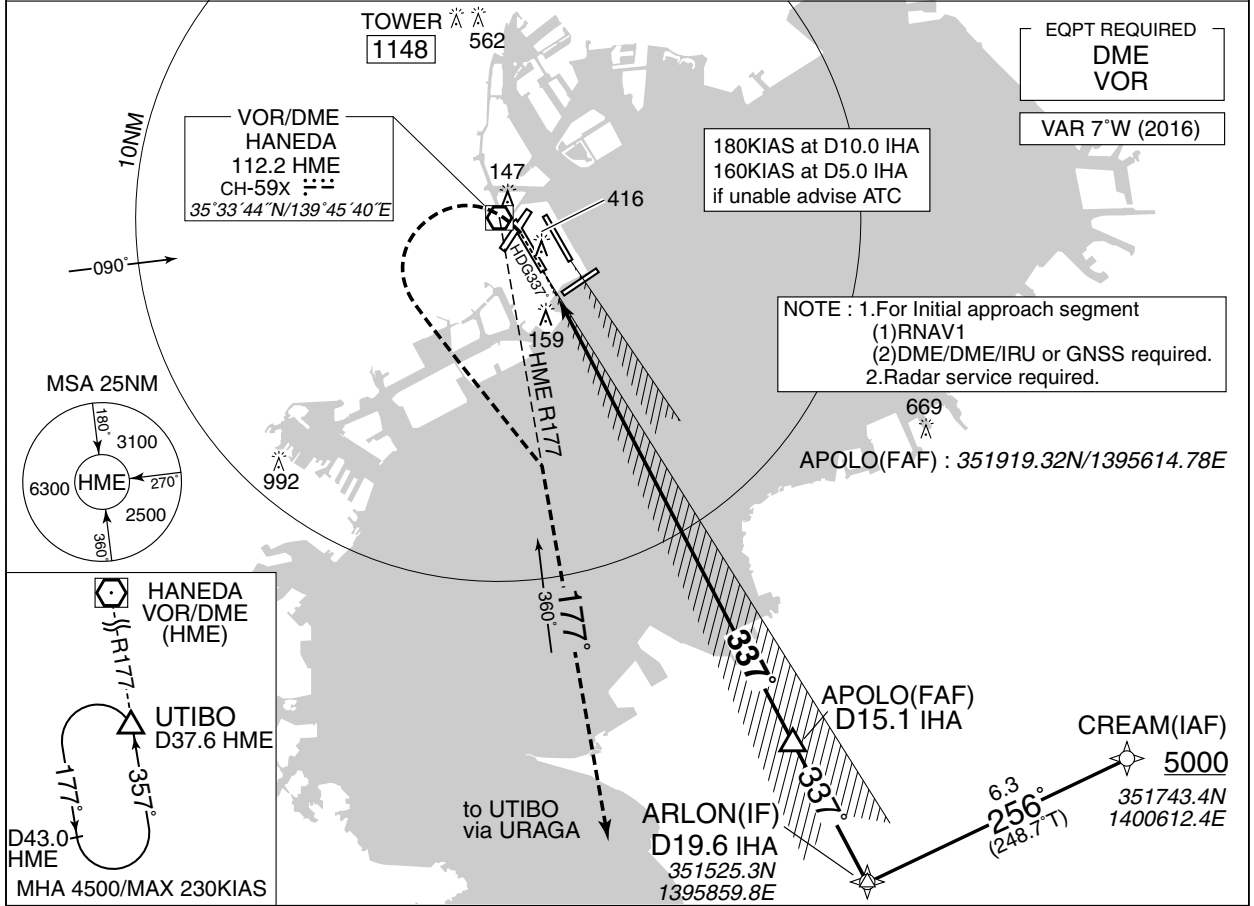

DME to IHA	0.2	15.1	19.6
NM to THR	0	14.9	19.4

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 18	AD elev. 21	
CAT	CAT I		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	VIS
A	218 (200)	550	730 (709)	1600
B				2400
C				2400
D				3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L/34R.




INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

LOC Z RWY34L

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 111.7 IHA ILS-DME CH-54X	TOKYO TOWER 118.1 - 124.35 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

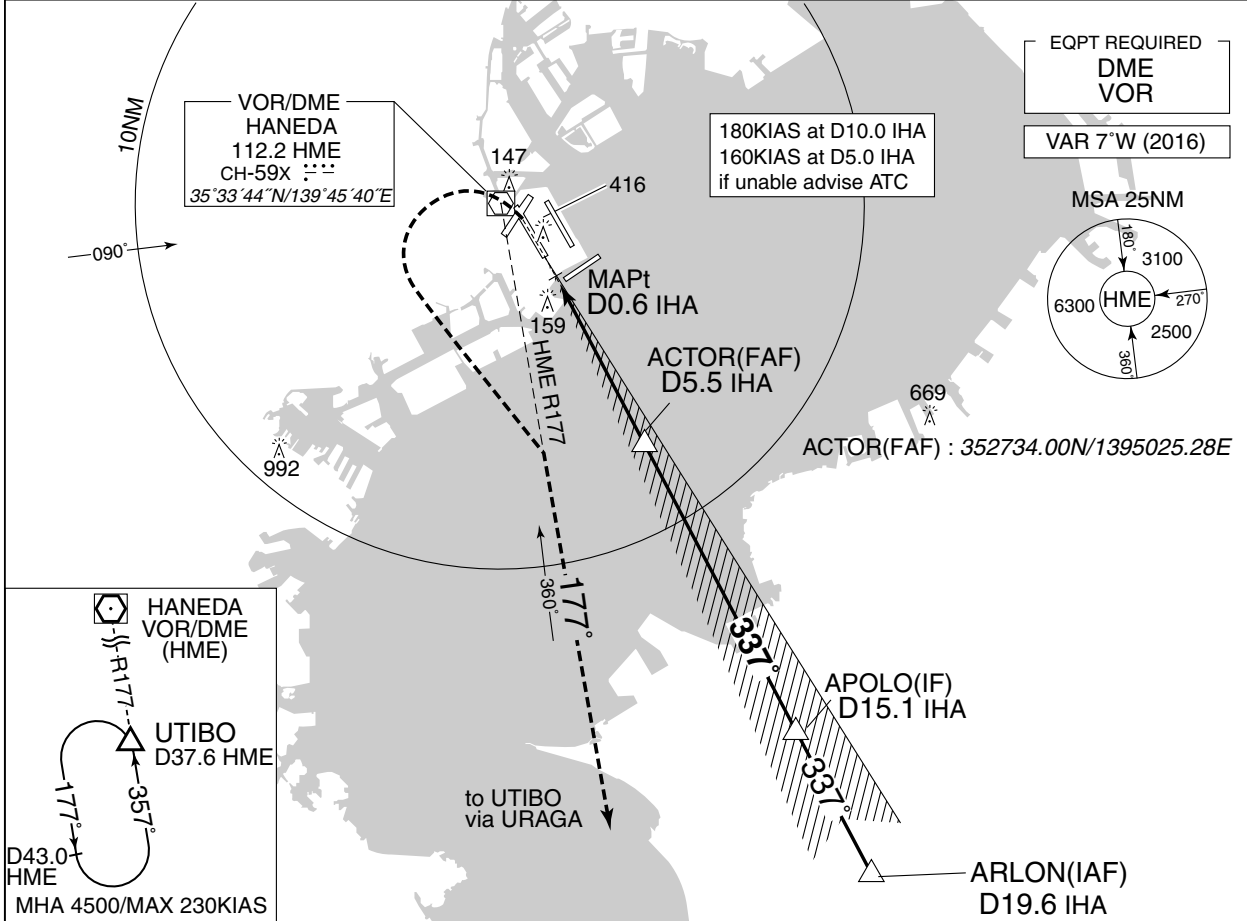

	NM to IHA	MAPt	2	3	4	5	FAF
	ALT (3.0° APCH Path)	-	646	964	1283	1601	1768

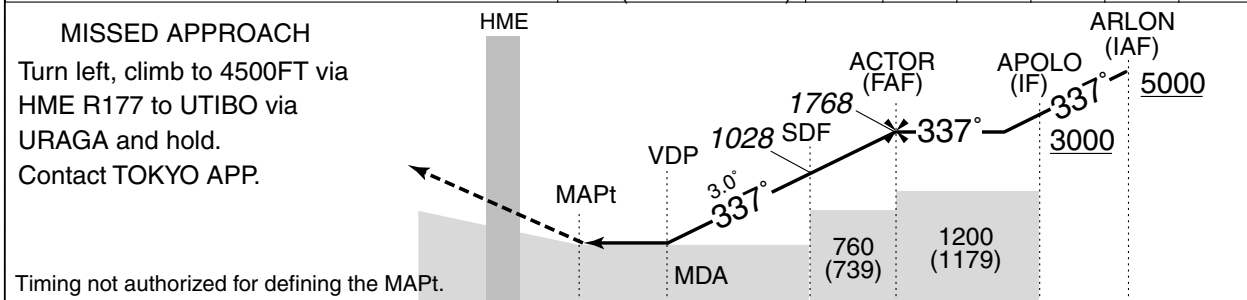

DME to IHA	0.2	0.6	1.8	3.2	5.5	15.1	19.6
NM to THR	0	0.5	1.6	3.0	5.3	14.9	19.4



MINIMA		THR elev. 18		AD elev. 21	
CAT	LOC		CIRCLING		
	MDA(H)	RVR/CMV	MDA(H)	VIS	
A	560 (539)	1000	730 (709)	1600	
B		1200		2400	
C		1600		3200	
D					

Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L/34R.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS Y RWY34L

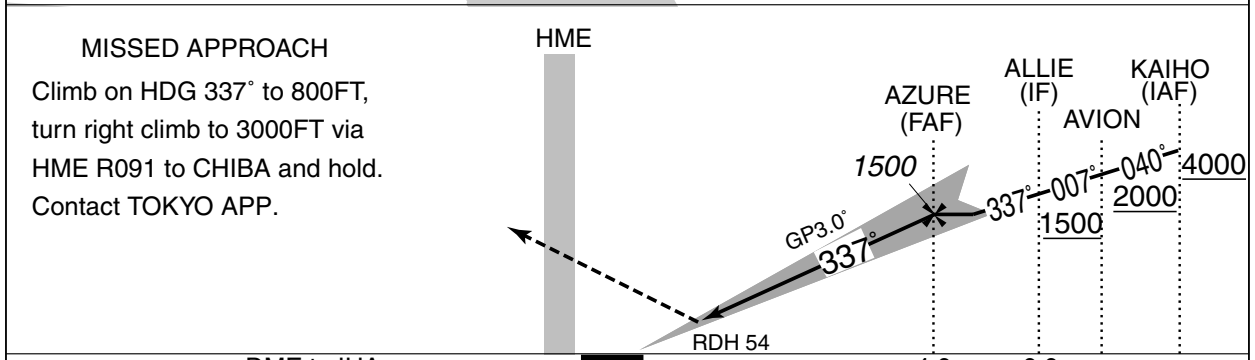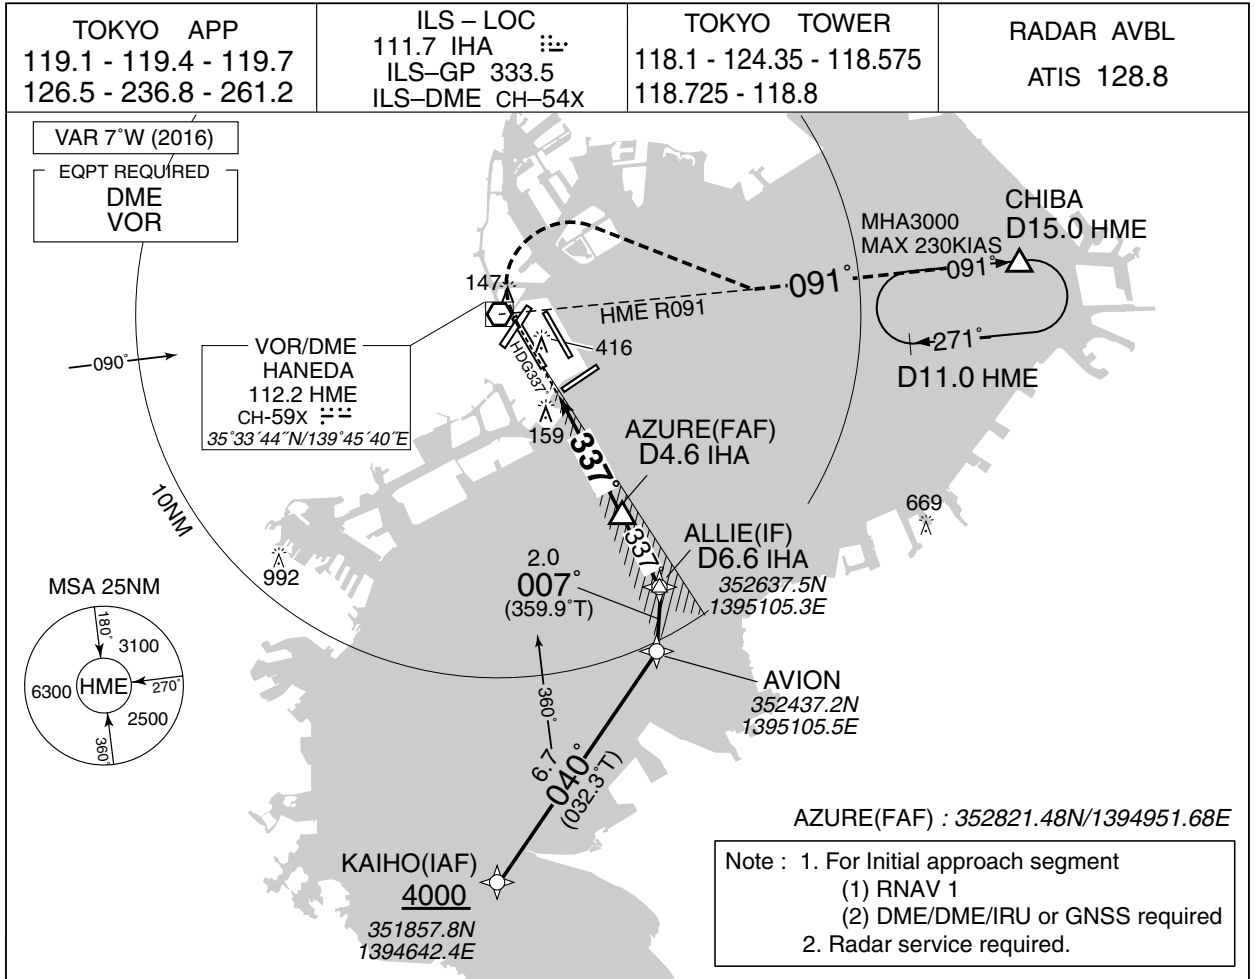

DME to IHA	0.2	4.6	6.6	
NM to THR	0	4.4	6.4	

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 18	AD elev. 21	
CAT	CAT I		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	VIS
A	218 (200)	550	730 (709)	1600
B				2400
C				2400
D				3200


MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling is not authorized during the night time, except counterclockwise circling to RWY16R/16L/34R.

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

LOC Y RWY34L

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 111.7 IHA ILS-DME CH-54X	TOKYO TOWER 118.1 - 124.35 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

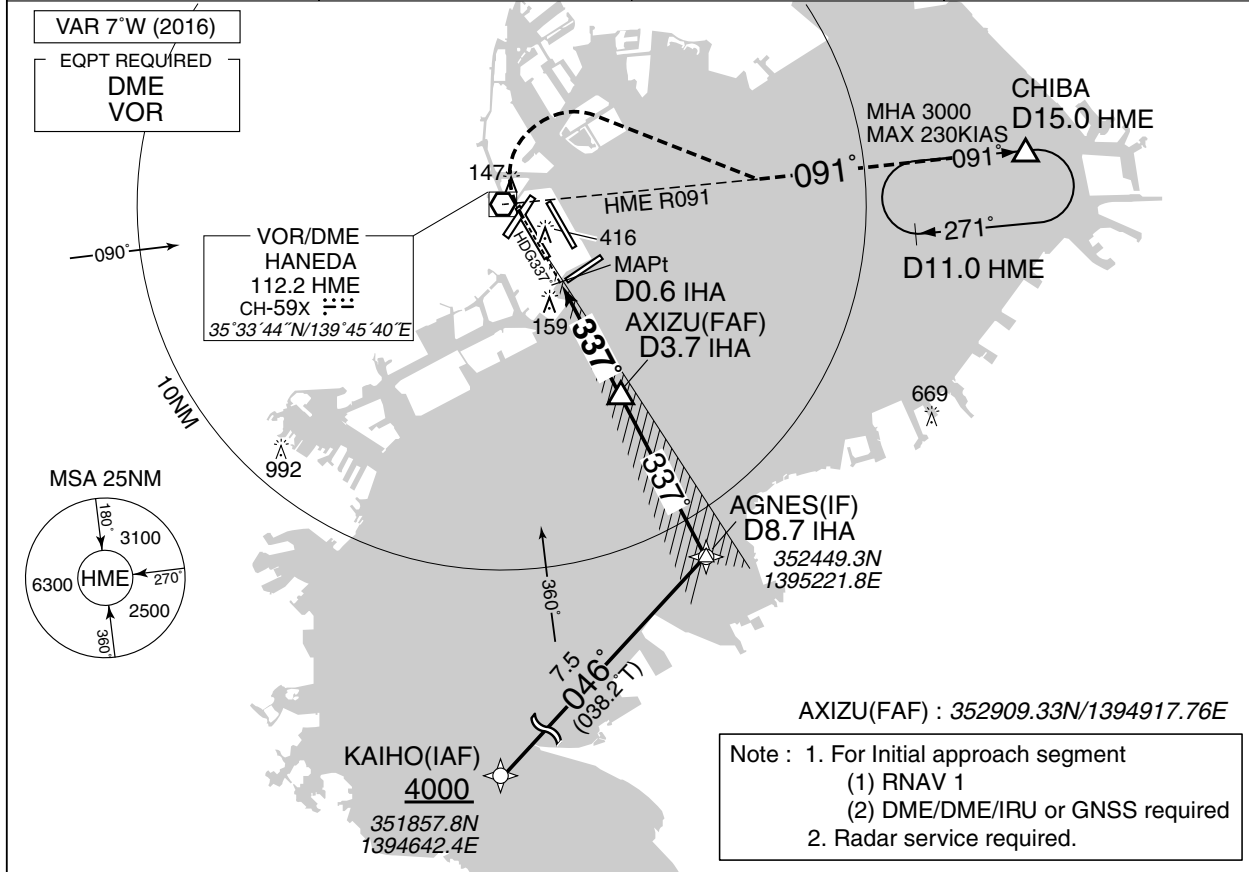

NM to IHA	MAPt	2	3	FAF
ALT (3.0° APCH Path)	-	646	964	1184

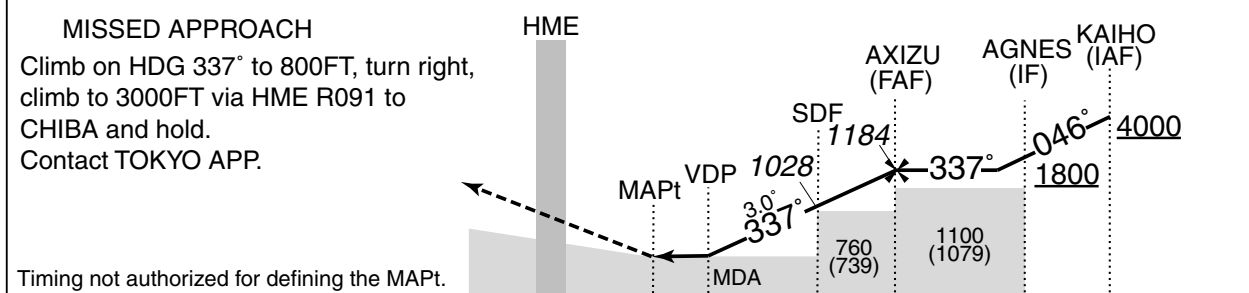

DME to IHA	0.2	0.6	1.8	3.2	3.7	8.7
NM to THR	0.5	1.6	3.0	3.5	8.5	

MINIMA		THR elev. 18		AD elev. 21	
CAT	LOC		CIRCLING		VIS
	MDA(H)	RVR/CMV	MDA(H)		
A	560 (539)	1000	730 (709)	1600	
B		1200		2400	
C		1600		3200	
D					

Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L/34R.



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS X RWY34L

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 111.7 IHA ILS-GP 333.5 ILS-DME CH-54X	TOKYO TOWER 118.1 - 124.35 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

Simultaneous approach authorized with RWY34R

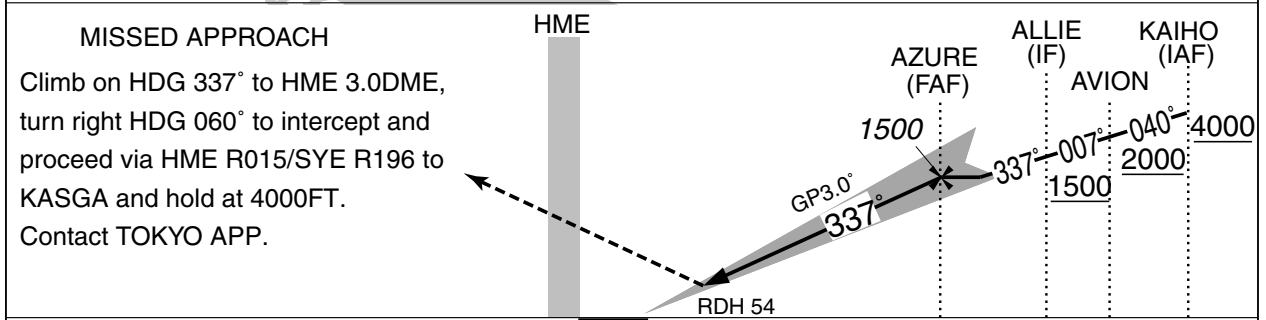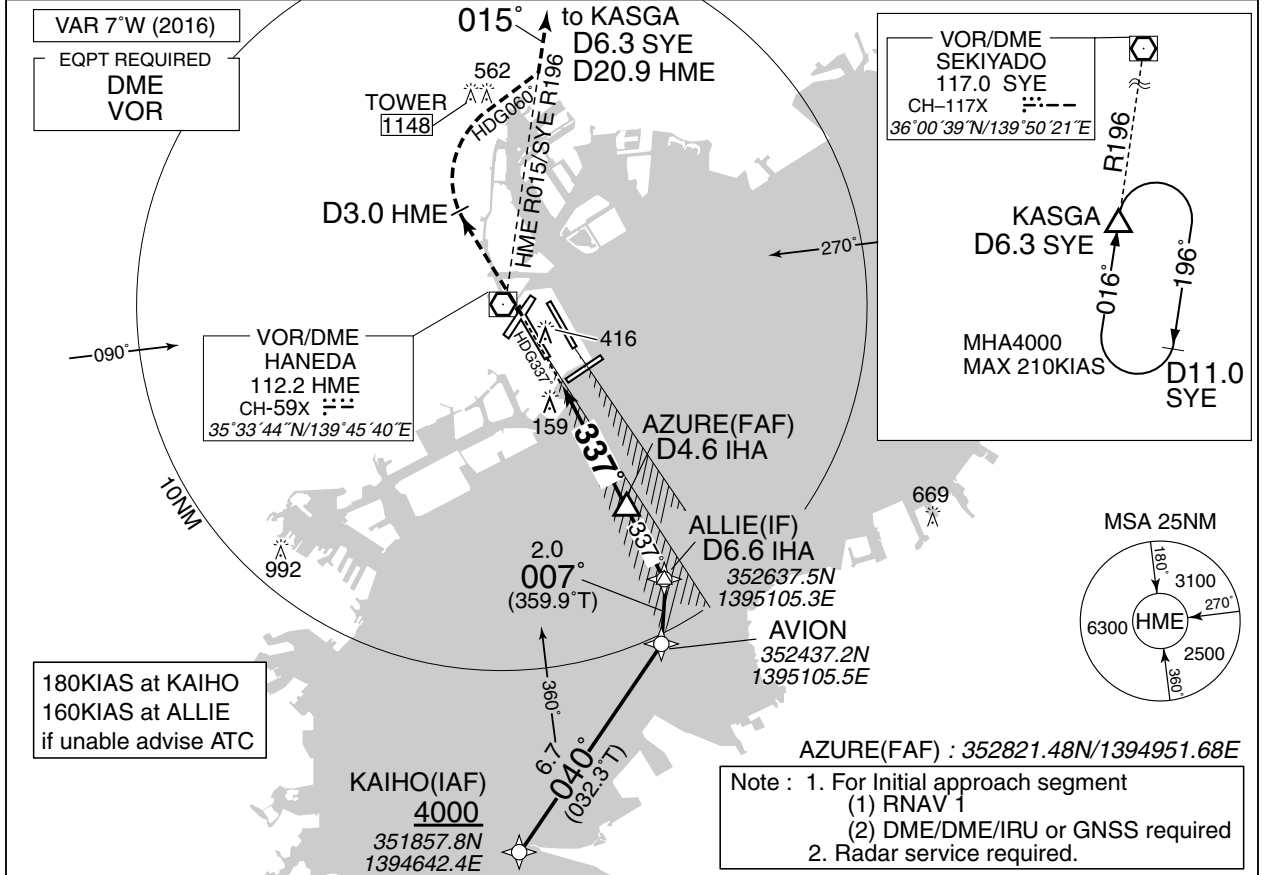

DME to IHA	0.2	4.6	6.6
NM to THR	0	4.4	6.4

Missed APCH climb gradient MNM 5.0%


MINIMA	THR elev. 18	AD elev. 21		
CAT	CAT I		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	VIS
A	218 (200)	550	730 (709)	1600
B				2400
C				2400
D				3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling is not authorized during the night time, except counterclockwise circling to RWY16R/16L/34R.

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

LOC X RWY34L

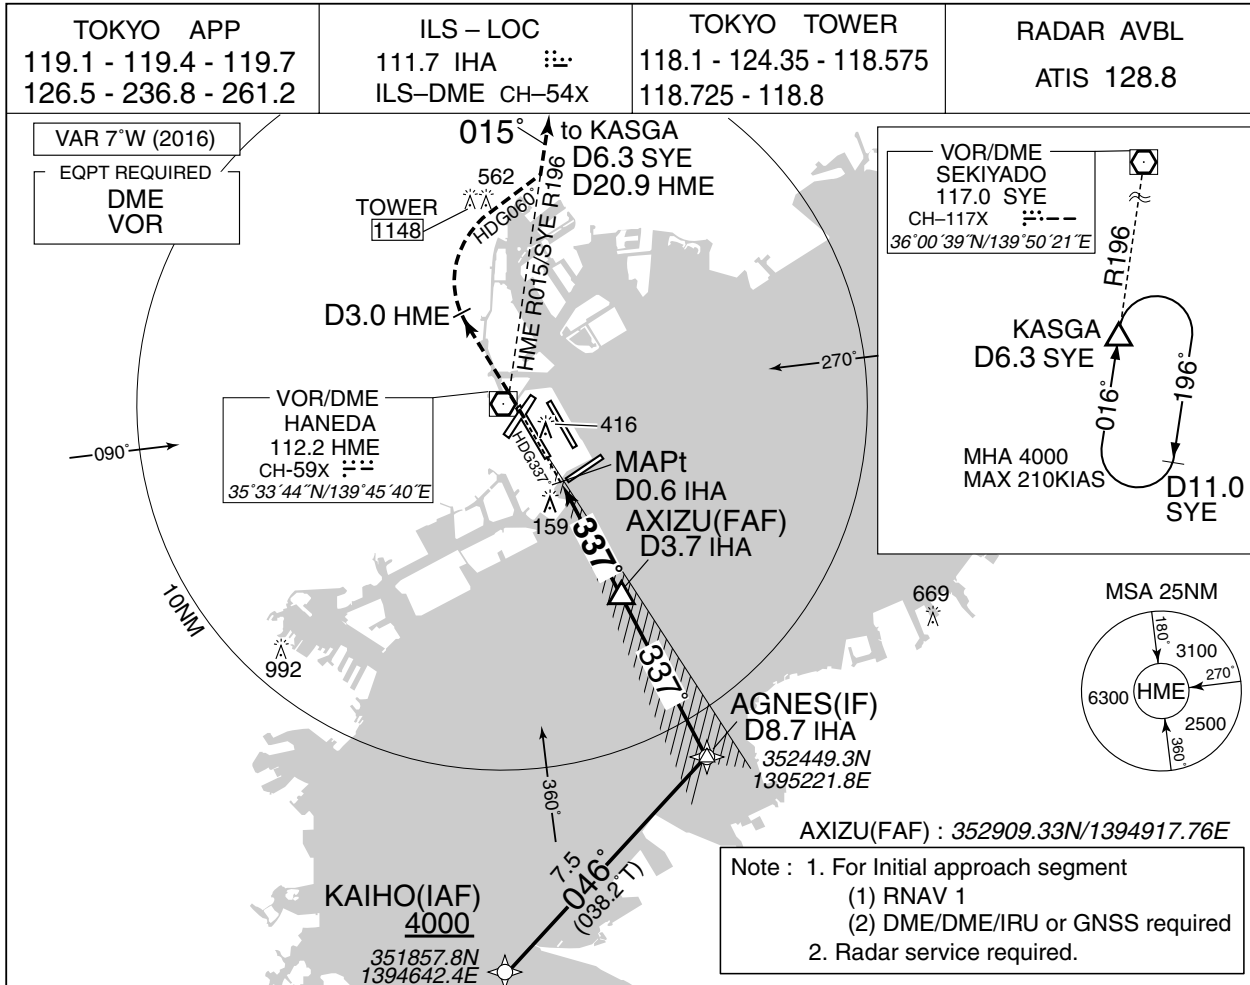

NM to IHA	MAPt	2	3	FAF
ALT (3.0° APCH Path)	-	646	964	1184

**MISSED APPROACH**  
Climb on HDG 337° to HME 3.0DME, turn right HDG 060° to intercept and proceed via HME R015/SYE R196 to KASGA and hold at 4000FT. Contact TOKYO APP.  
Timing not authorized for defining the MAPt.

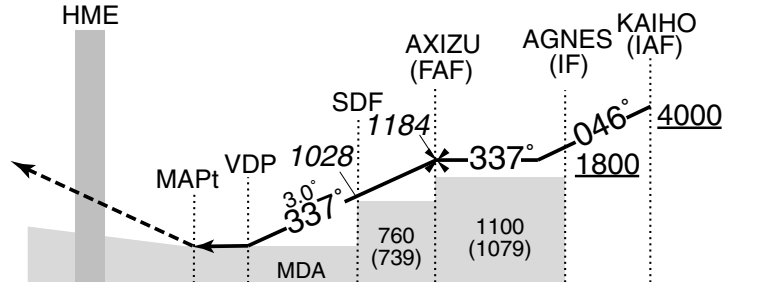

DME to IHA	0.2	0.6	1.8	3.2	3.7	8.7
NM to THR	0	0.5	1.6	3.0	3.5	8.5

Missed APCH climb gradient MNM 3.0%

MINIMA		THR elev. 18		AD elev. 21	
CAT	LOC		CIRCLING		VIS
	MDA(H)	RVR/CMV	MDA(H)		
A	560 (539)	1000	730 (709)	1600	
B		1200			
C		2400			
D		1600			3200


MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling is not authorized during the night time, except counterclockwise circling to RWY16R/16L/34R.

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

VOR RWY34L

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	HANEDA VOR/DME 112.2 HME CH-59X $\equiv \equiv$ 35°33'44"N/139°45'40"E	TOKYO TOWER 118.1 - 124.35 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	---	--	--------------------------

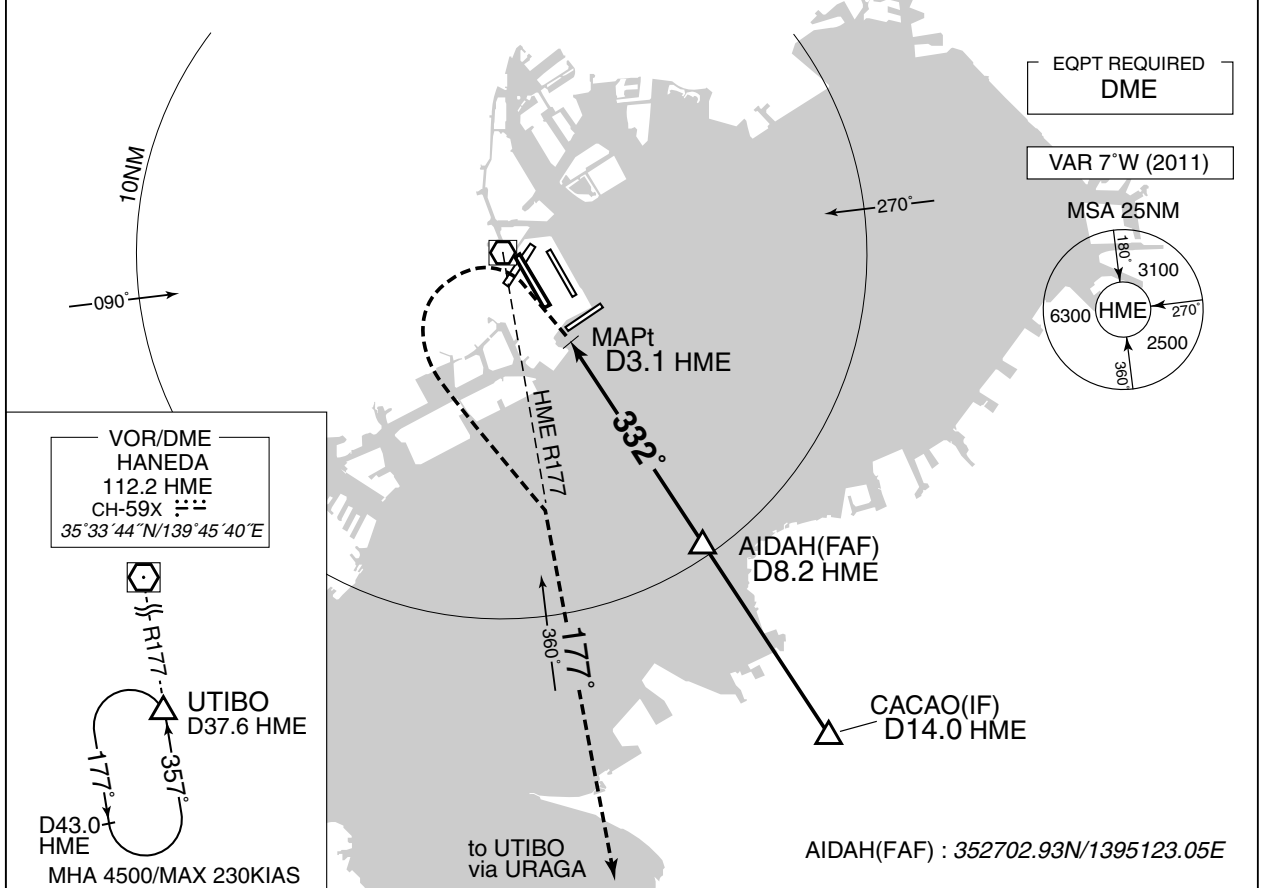

	NM to HME	MAPt	4	5	6	7	8	FAF
	ALT (3.0° APCH Path)	-	722	1041	1359	1678	1996	2043

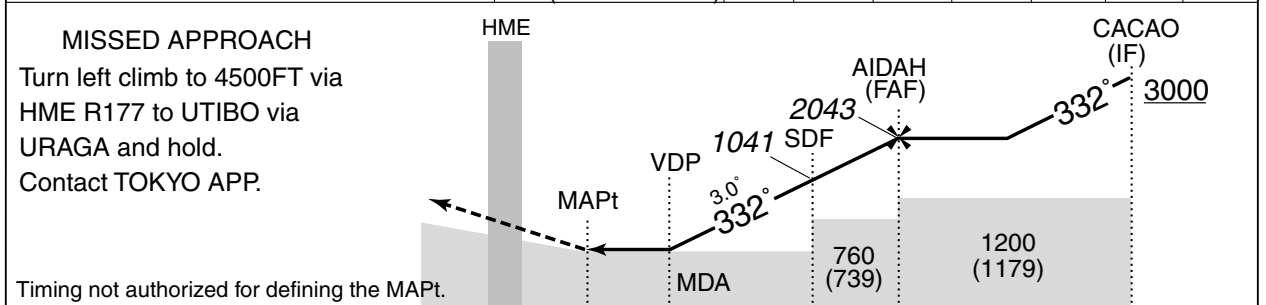

DME to HME	1.9	3.1	3.6	5.0	8.2	14.0
NM to THR	0	1.2	1.7	3.1	6.3	12.1

MINIMA		THR elev. 18		AD elev. 21	
CAT	MDA(H)		CIRCLING		VIS
		RVR/CMV	MDA(H)		
A	580 (559)	1000	730 (709)	1600	
B		1200			
C		1600			2400
D					3200



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS Z RWY34R (CAT II & III)

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 108.9 ITC ILS - GP 329.3 ILS - DME CH - 26X	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

Simultaneous approach authorized with RWY34L

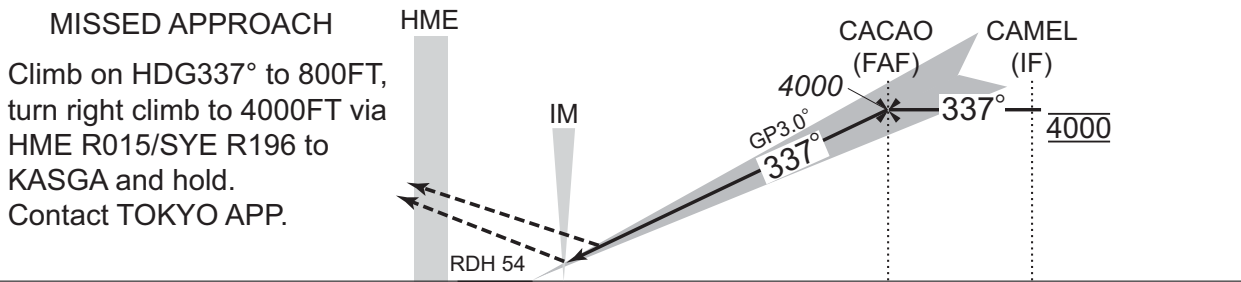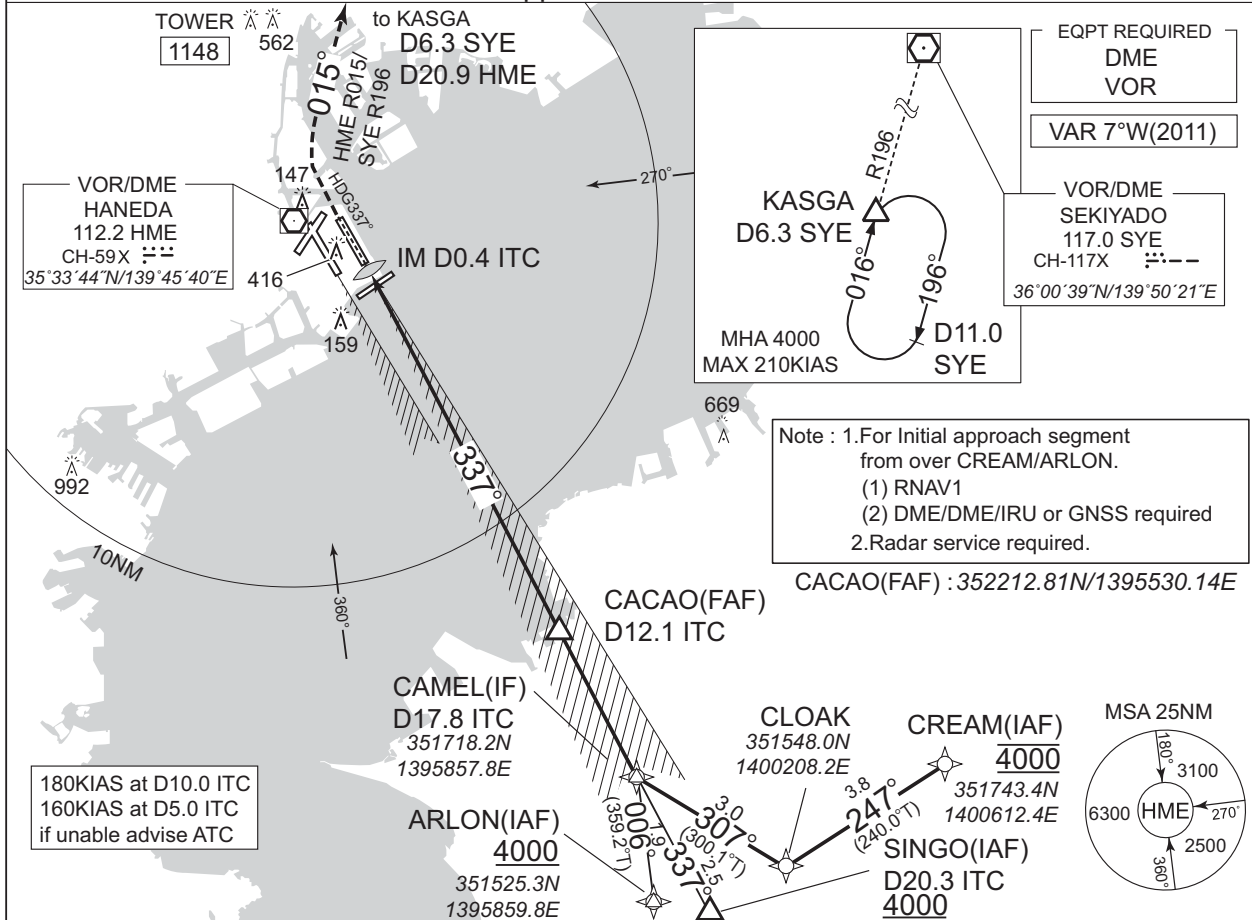

DME to ITC	0.2 0.4	12.1	17.8
NM to THR	0 0.2	11.9	17.6

Missed APCH climb gradient MNM 5.0%

MINIMA THR elev. 20 AD elev. 21

CAT	CAT III		CAT II		CAT I		CIRCLING	
	RVR	DA(H)	RA	RVR	DA(H)	RVR/CMV	MDA(H)	VIS
A								1600
B	100	120(100)	100	300	220(200)	550	730(709)	2400
C								3200
D								

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L and clockwise circling to RWY34L.


CHANGE: MINIMA (CAT III, II B → CAT III).

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

LOC Z RWY34R

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 108.9 ITC 3.0° ILS-DME CH-26X	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	---	--	--------------------------

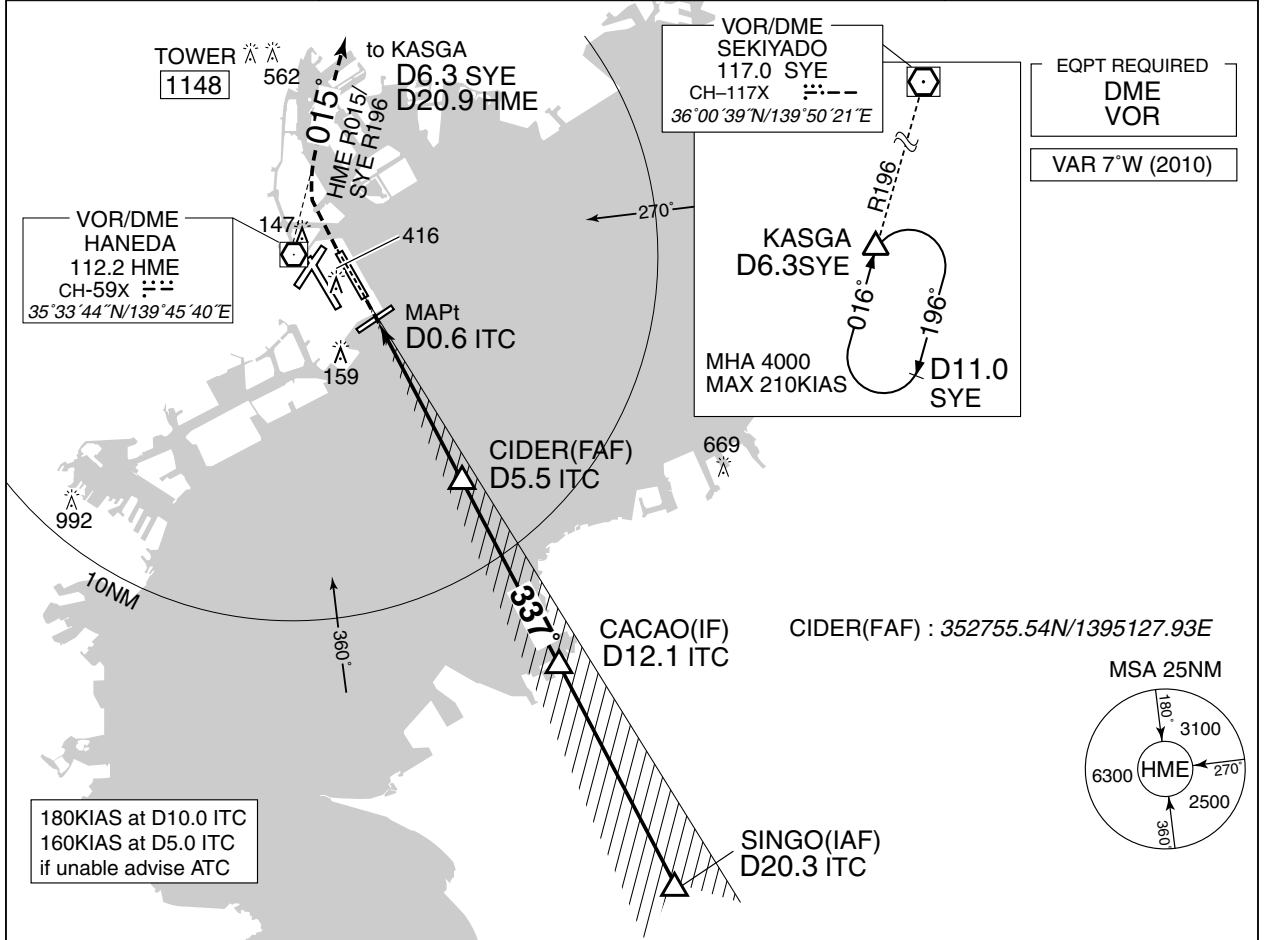

	NM to ITC	MAPt	3	4	5	FAF
	ALT (3.0° APCH Path)	-	970	1289	1607	1768

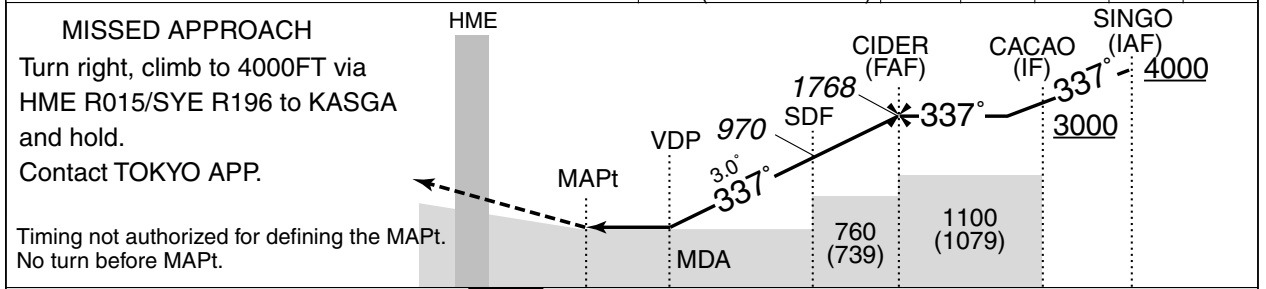

DME to ITC	0.2	0.6	2.1	3.0	5.5	12.1	20.3
NM to THR	0	0.5	1.9	2.8	5.3	11.9	20.1

Missed APCH climb gradient MNM 3.0%

MINIMA		THR elev. 20		AD elev. 21	
CAT	LOC		CIRCLING		VIS
	MDA(H)	RVR/CMV	MDA(H)		
A	700 (679)	1200	730 (709)	1600	
B		1400		2400	
C		1800		3200	
D					

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L and clockwise circling to RWY 34L.





INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS Y RWY34R (CAT II & III)

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 108.9 ITC $\equiv \dots$ ILS - GP 329.3 ILS - DME CH - 26X	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	---	--	--------------------------

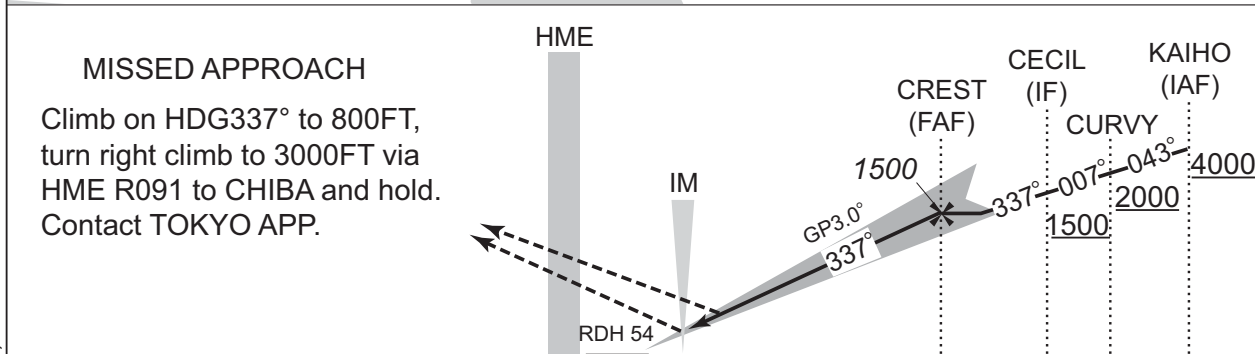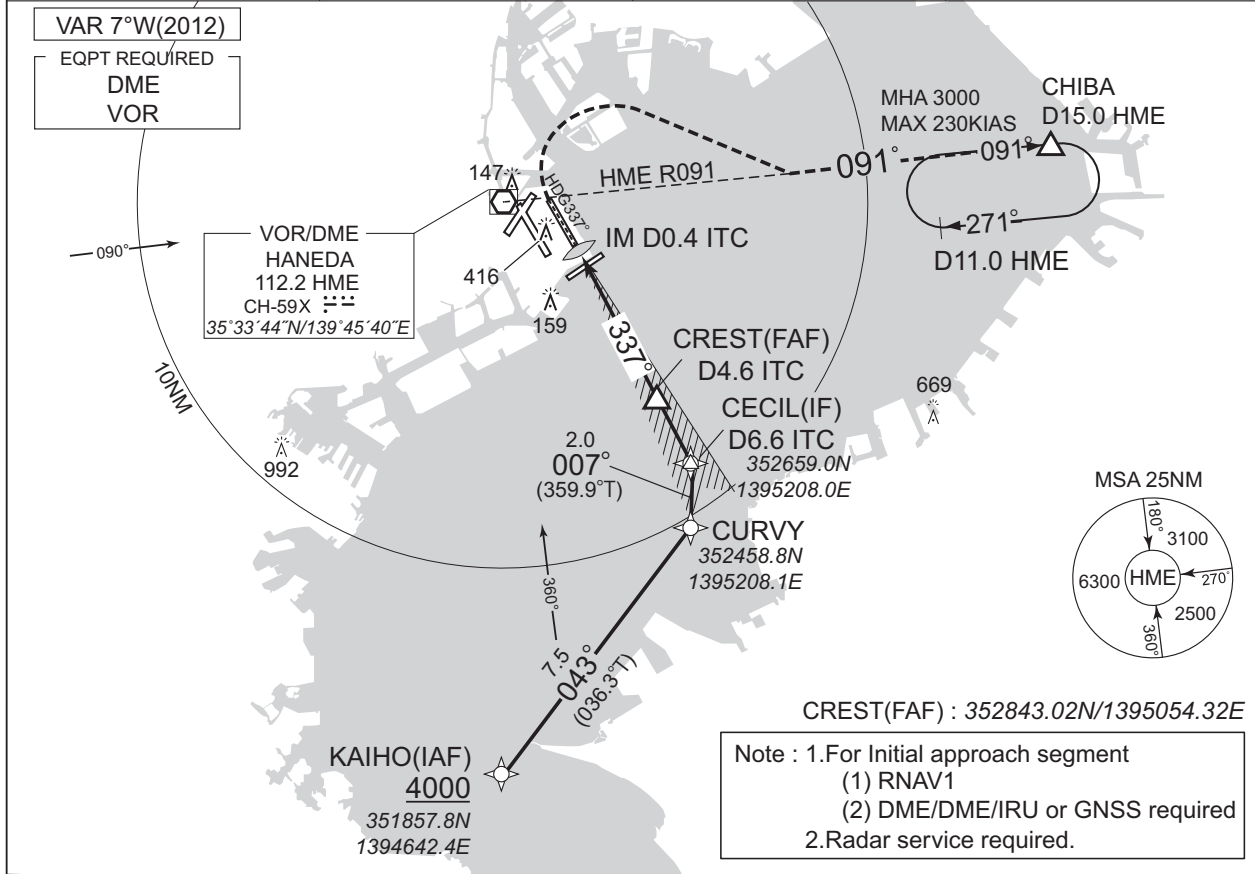

DME to ITC	0.2	0.4	4.6	6.6
NM to THR	0	0.2	4.4	6.4

MISSED APCH climb gradient MNM 5.0%

CAT	MINIMA		THR elev. 20		AD elev. 21		CIRCLING	
	CAT III	CAT II	CAT II	CAT I	CAT I	MDA(H)	VIS	
	RVR	DA(H)	RA	RVR	DA(H)	RVR/CMV		
A	100	120(100)	100	300	220(200)	550	730(709)	1600
B								2400
C								2400
D								3200



MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L and clockwise circling to RWY34L.

CHANGE: MINIMA(CAT IIIA, IIIB → CAT III).

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LOC Y RWY34R

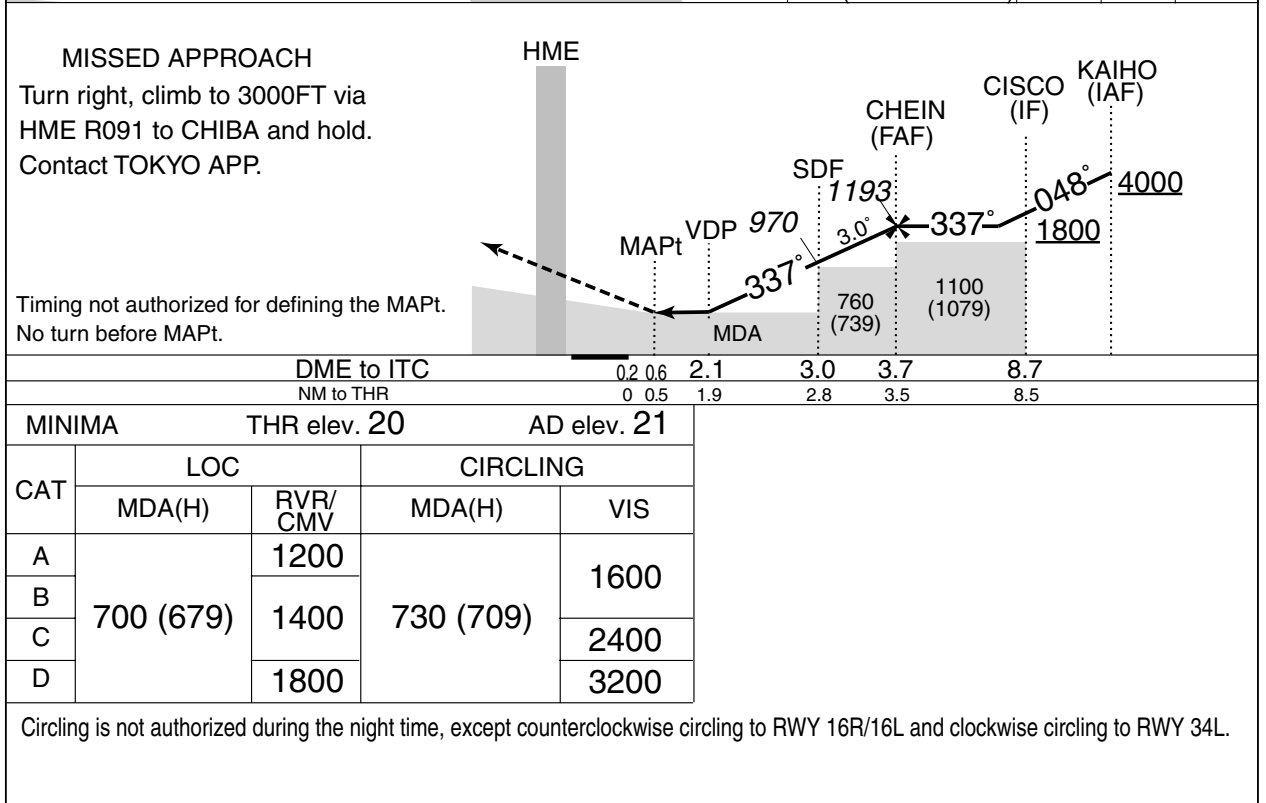
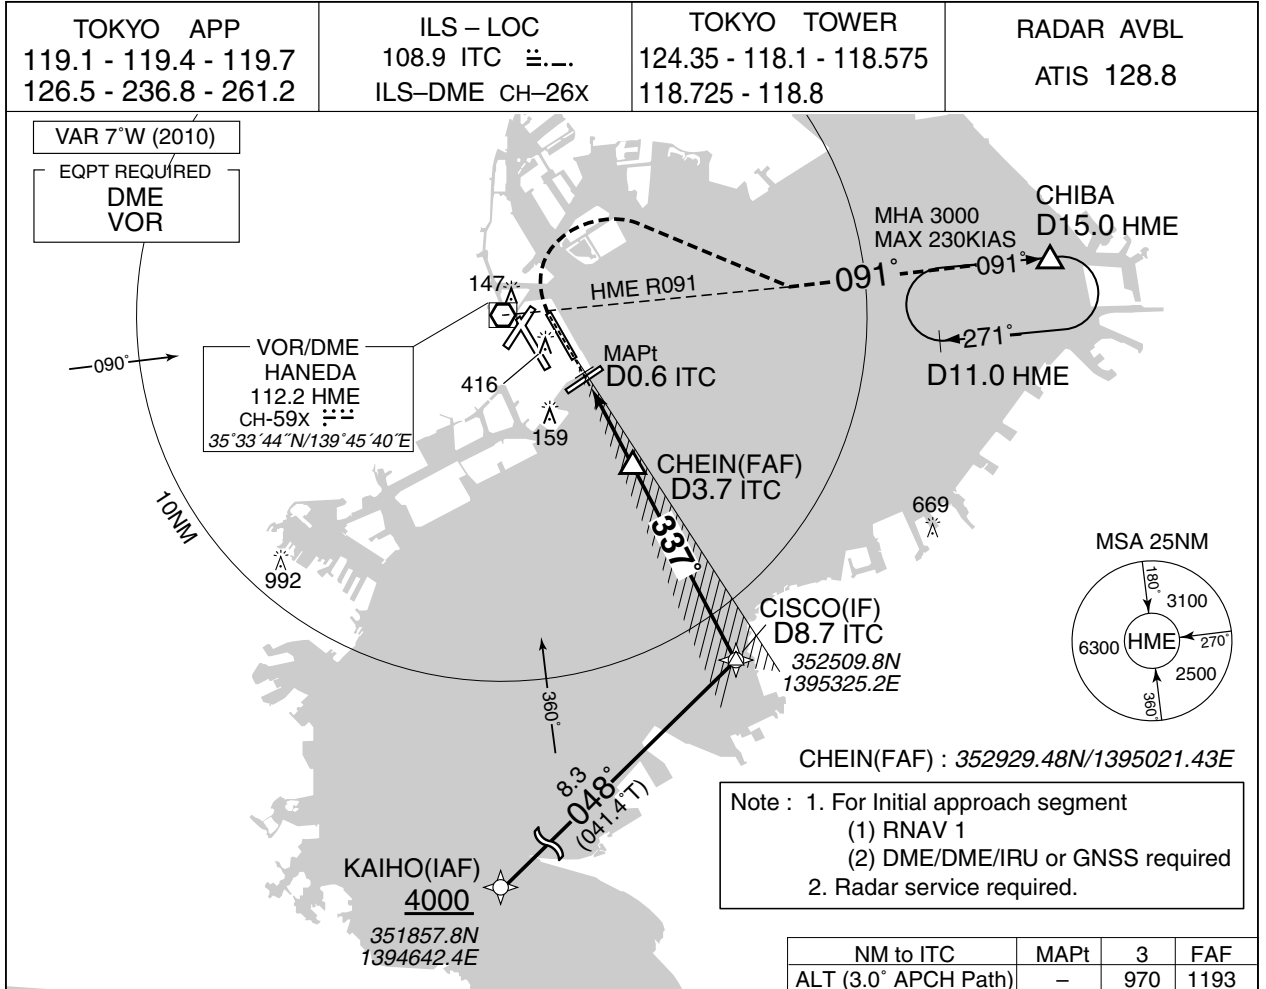


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS RWY22

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 108.1 IAD ILS-GP 334.7 ILS-DME CH-18X	TOKYO TOWER 118.575 - 118.1 - 124.35 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

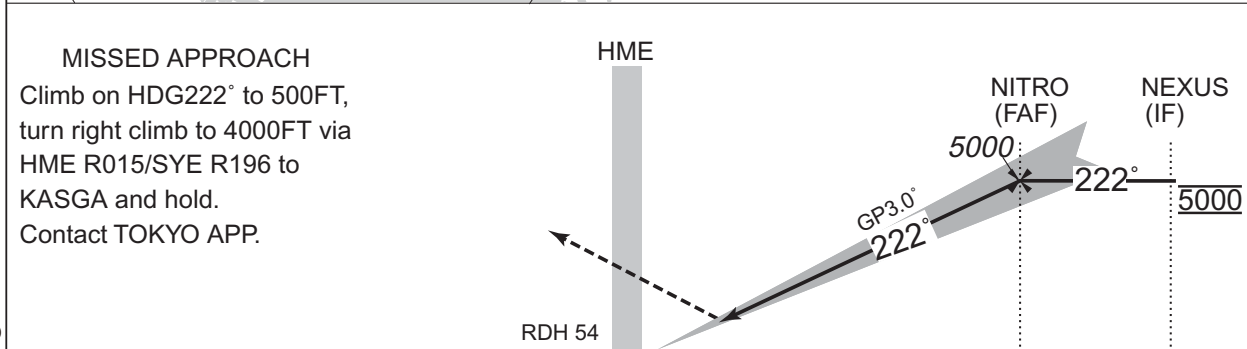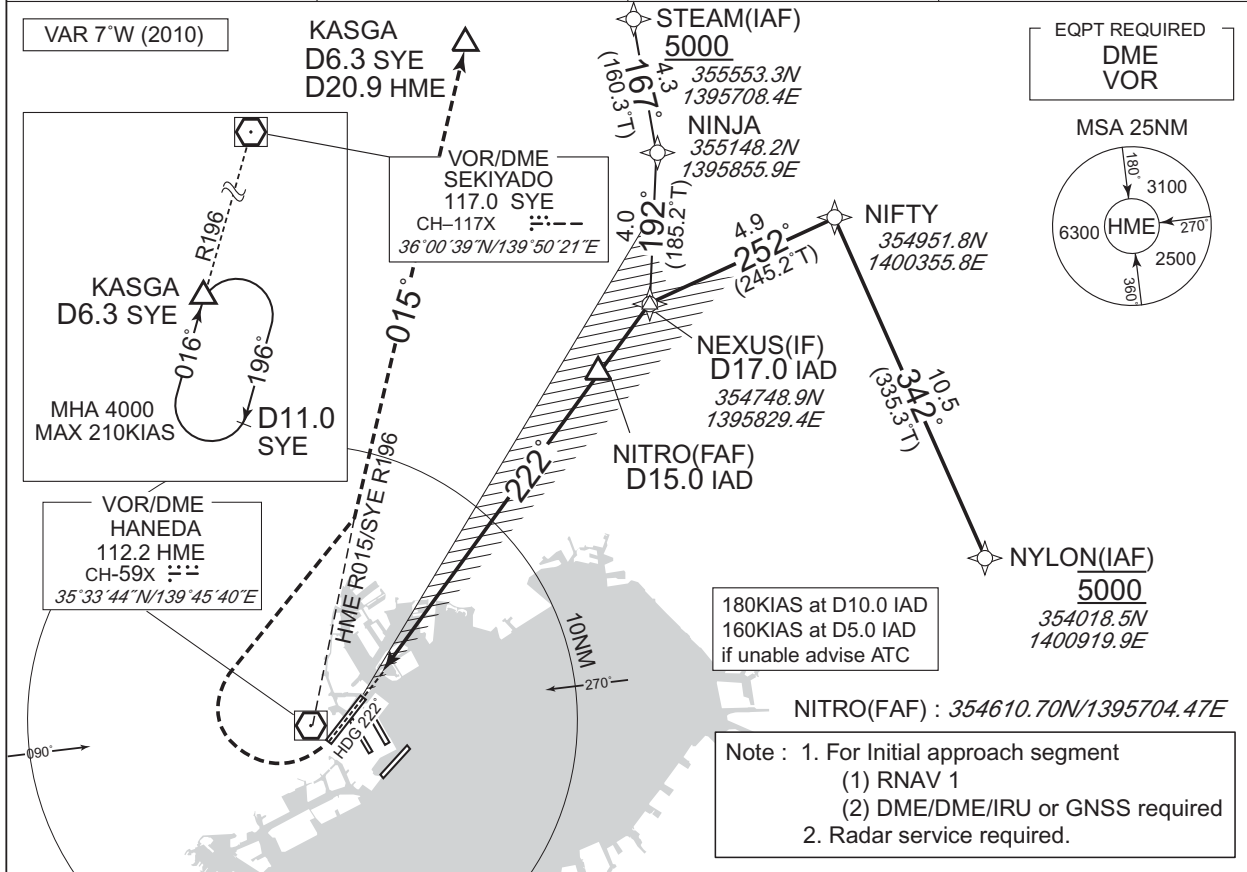

Missed APCH climb gradient MNM 6.0% due to airspace restrictions.

MINIMA		THR elev. 35	AD elev. 21	
CAT	CAT I		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	VIS
A	235 (200)	550	730 (709)	1600
B				2400
C				3200
D				


MINIMA with Missed APCH climb gradient below 6.0% are not established.  
Circling is not authorized during the night time, except counterclockwise circling to RWY16R/16L and clockwise circling to RWY23, RWY34R/34L.

CHANGE: Description of GP angle.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LOC RWY22

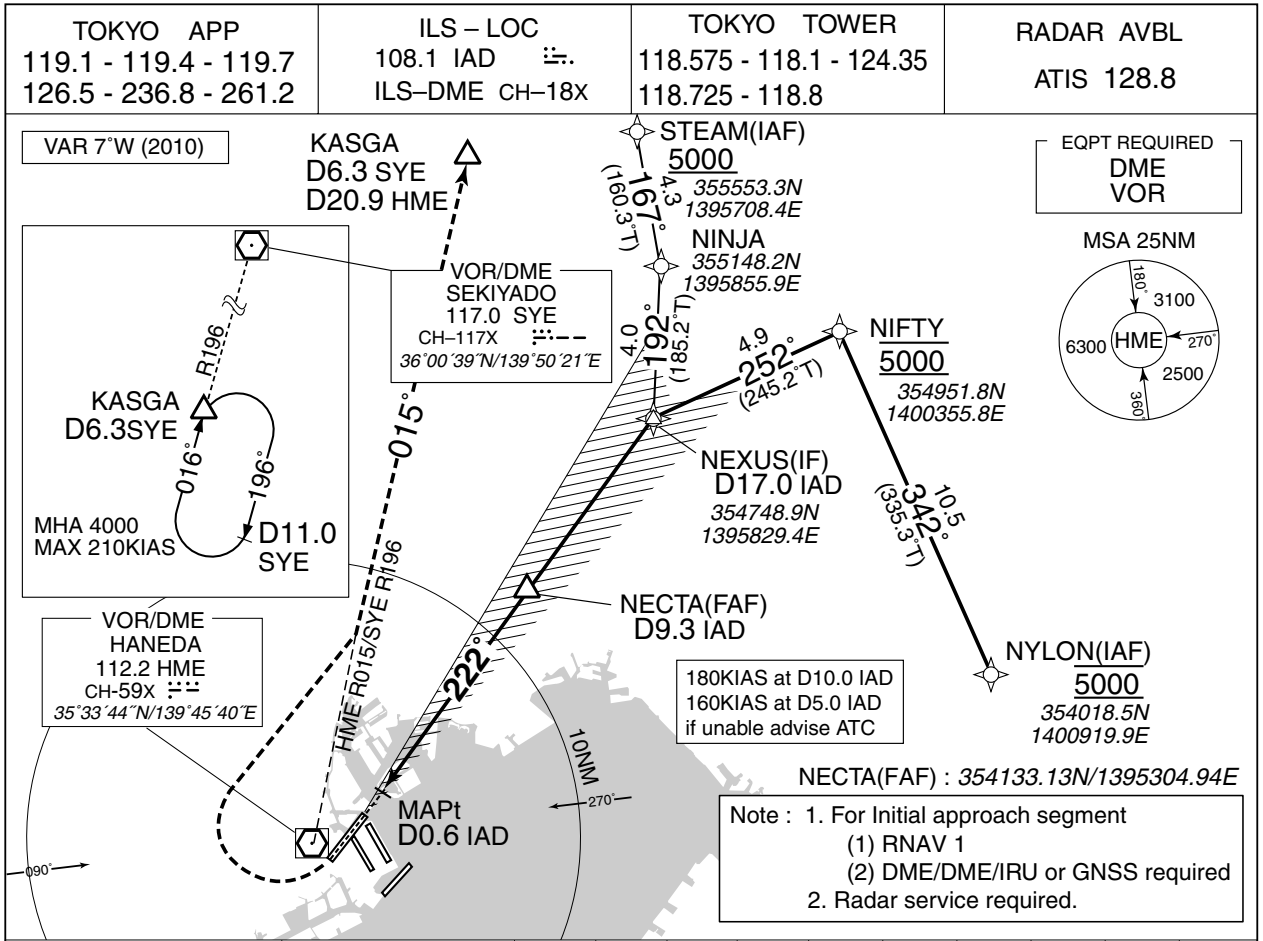

	NM to IAD	MAPt	2	3	4	5	6	7	8	9	FAF
	ALT (3.0° APCH Path)	-	662	986	1299	1618	1936	2255	2573	2891	3000

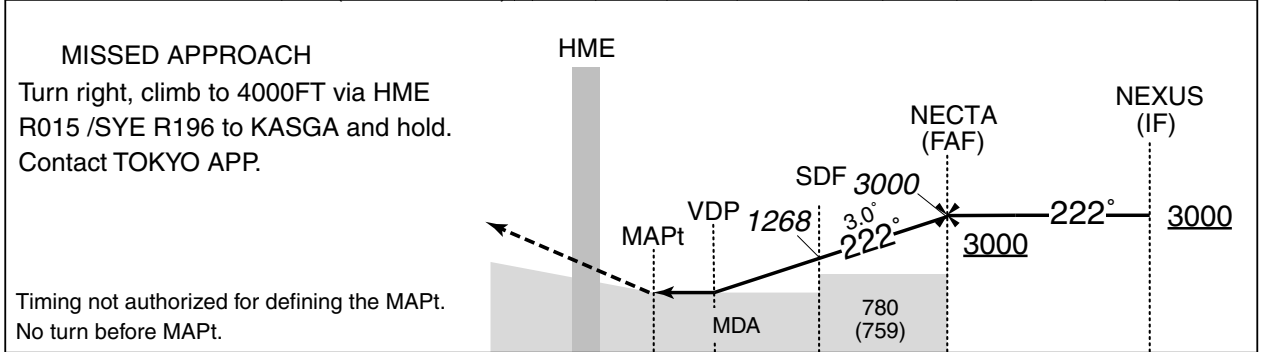

DME to IAD	0.2	0.6	1.9	3.9	9.3	17.0
NM to THR	0	0.5	1.7	3.7	9.1	16.8

Missed APCH climb gradient MNM 4.0%

MINIMA		THR elev. 35	AD elev. 21	
CAT	LOC		CIRCLING	
	MDA(H)	RVR/CMV	MDA(H)	VIS
A	600 (579)	1000	730 (709)	1600
B		1200		2400
C		1600		3200
D				

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling is not authorized during the night time, except counterclockwise circling to RWY16R/16L and clockwise circling to RWY23, RWY34R/34L.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Z RWY22

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	LDA - LOC 110.1 IKL LDA-DME CH-38X	TOKYO TOWER 118.575 - 118.1 - 124.35 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------


Simultaneous approach authorized with RWY23(LDA)

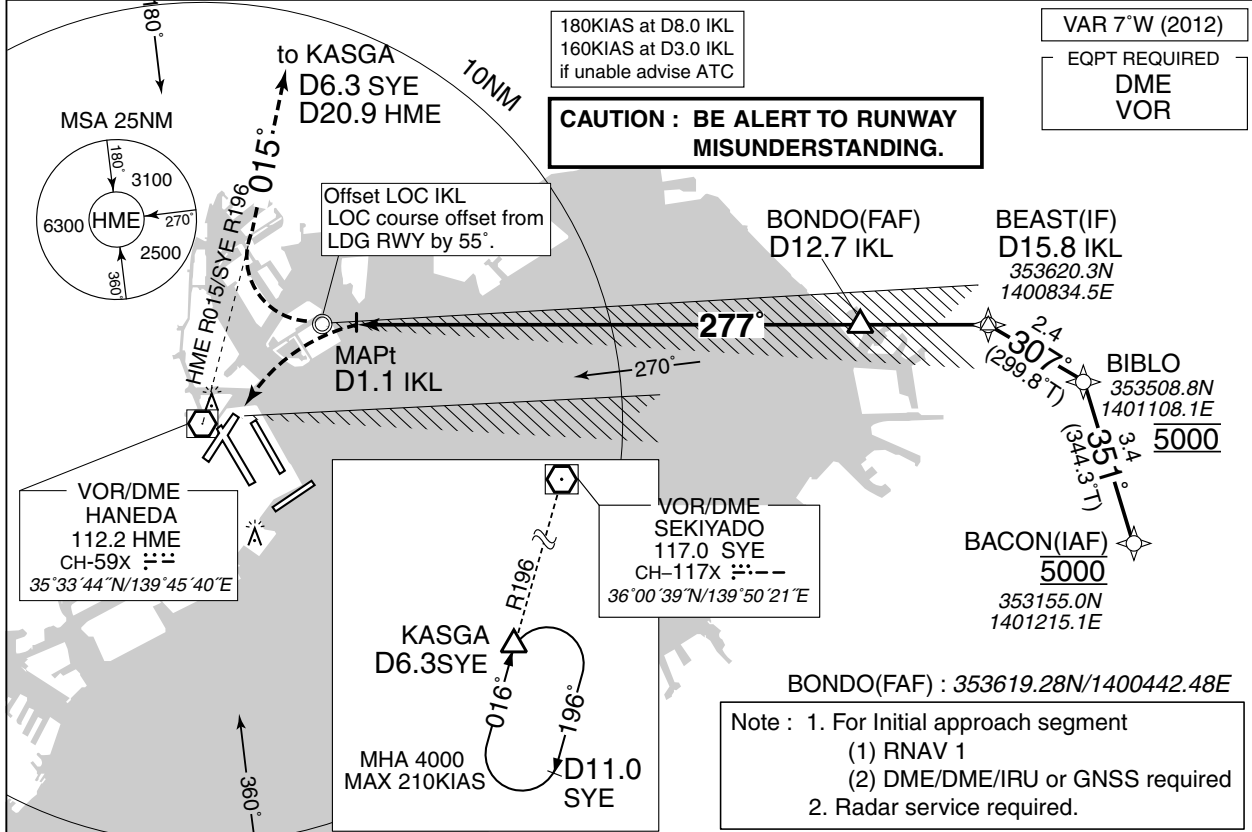

MISSED APPROACH

At MAPt, turn right climb to 4000FT via HME R015 /SYE R196 to KASGA and hold.  
Contact TOKYO APP.

Timing not authorized for defining the MAPt.

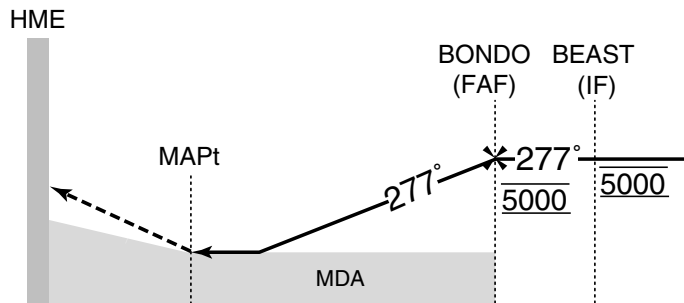

DME to IKL	1.1	12.7	15.8
NM to THR	3.8	15.4	18.5

Missed APCH climb gradient MNM 4.0%

MINIMA	THR elev. 35	AD elev. 21
CAT	MDA(H)	VIS
A	1000 (979)	6000
B		
C		
D		

**Do Not turn left  
until D1.1 IKL**  
SO AS NOT TO MISUNDERSTAND  
THE RUNWAY

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
MINIMA APPLICATION CRITERIA in AD1.6.10.1.4 are not applicable.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Z RWY22

Visual Prescribed Track for LDA Z RWY22

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.  
 Note : Remain on the LDA until passing MAPt so as not to penetrate the NTZ, and to avoid the RWY23 traffic.

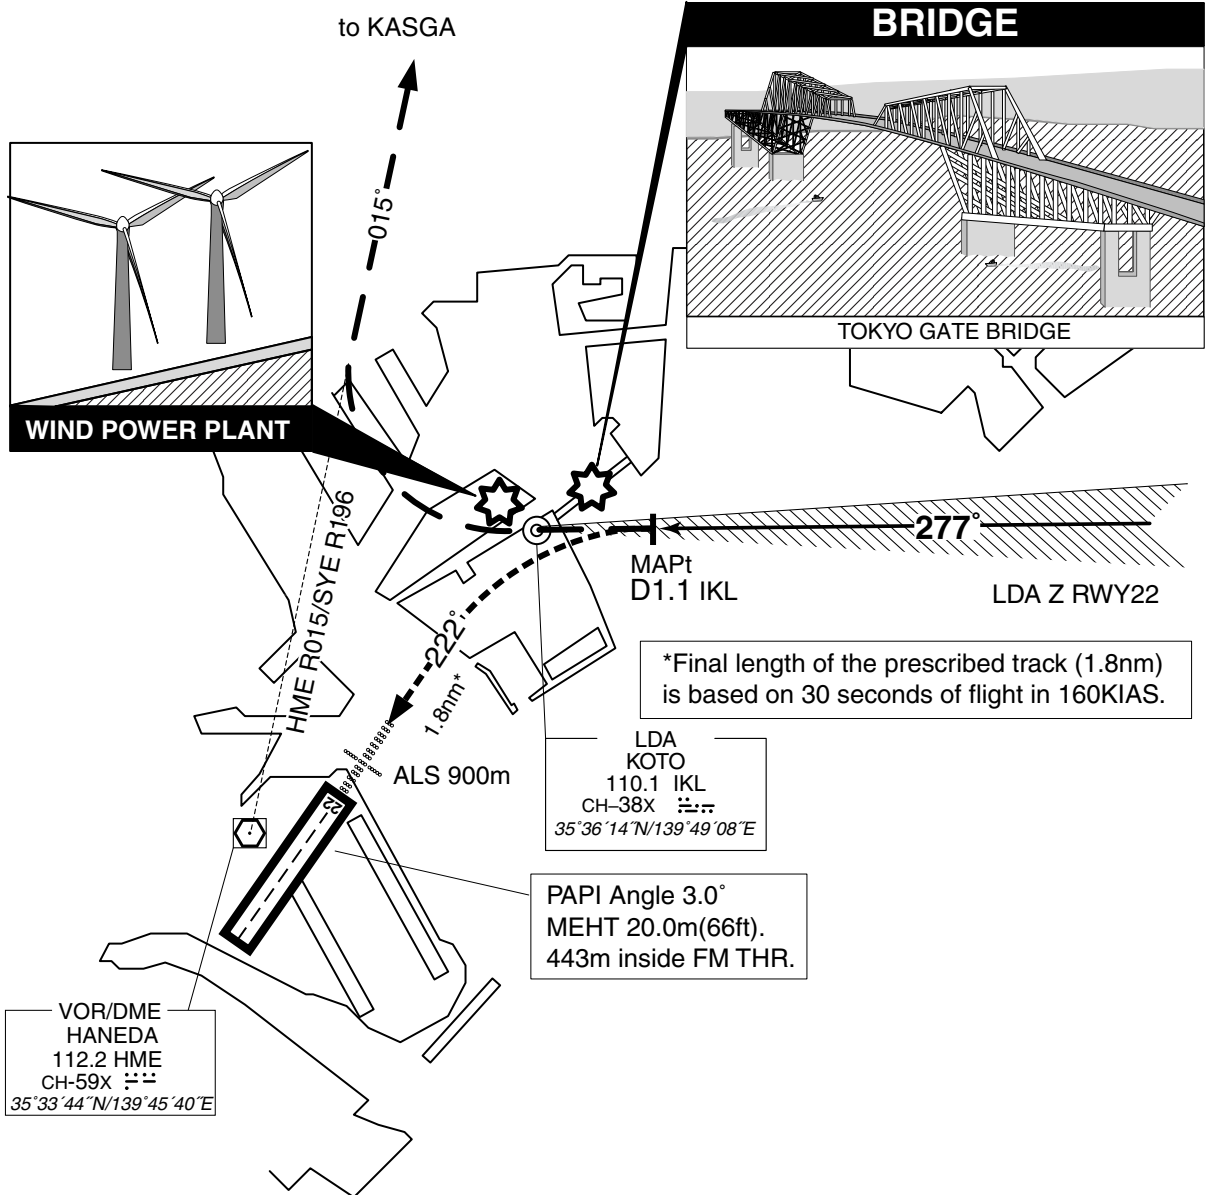



In case of GO AROUND, pilot should report ATC as soon as practicable.  
 Until receiving ATC instructions, aircraft turn right for joining HME R015/SYE R196 and missed approach procedure.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Y RWY22

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	LDA - LOC 110.1 IKL LDA-DME CH-38X	TOKYO TOWER 118.575 - 118.1 - 124.35 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

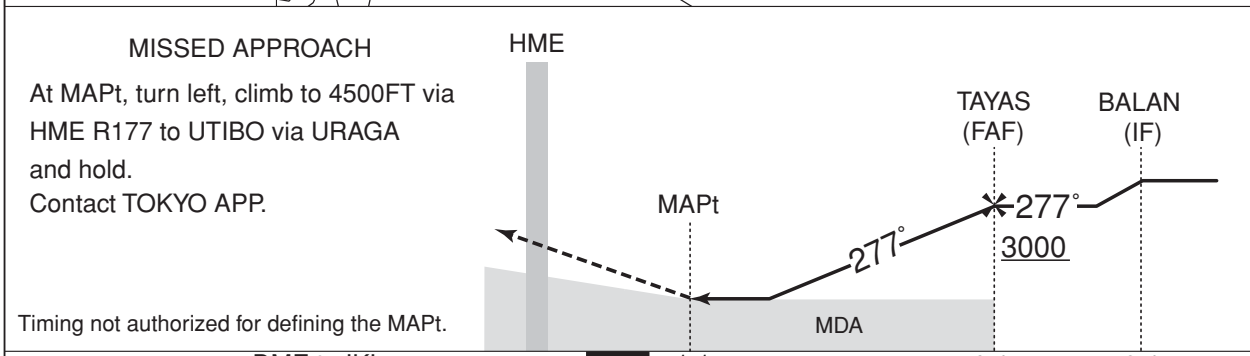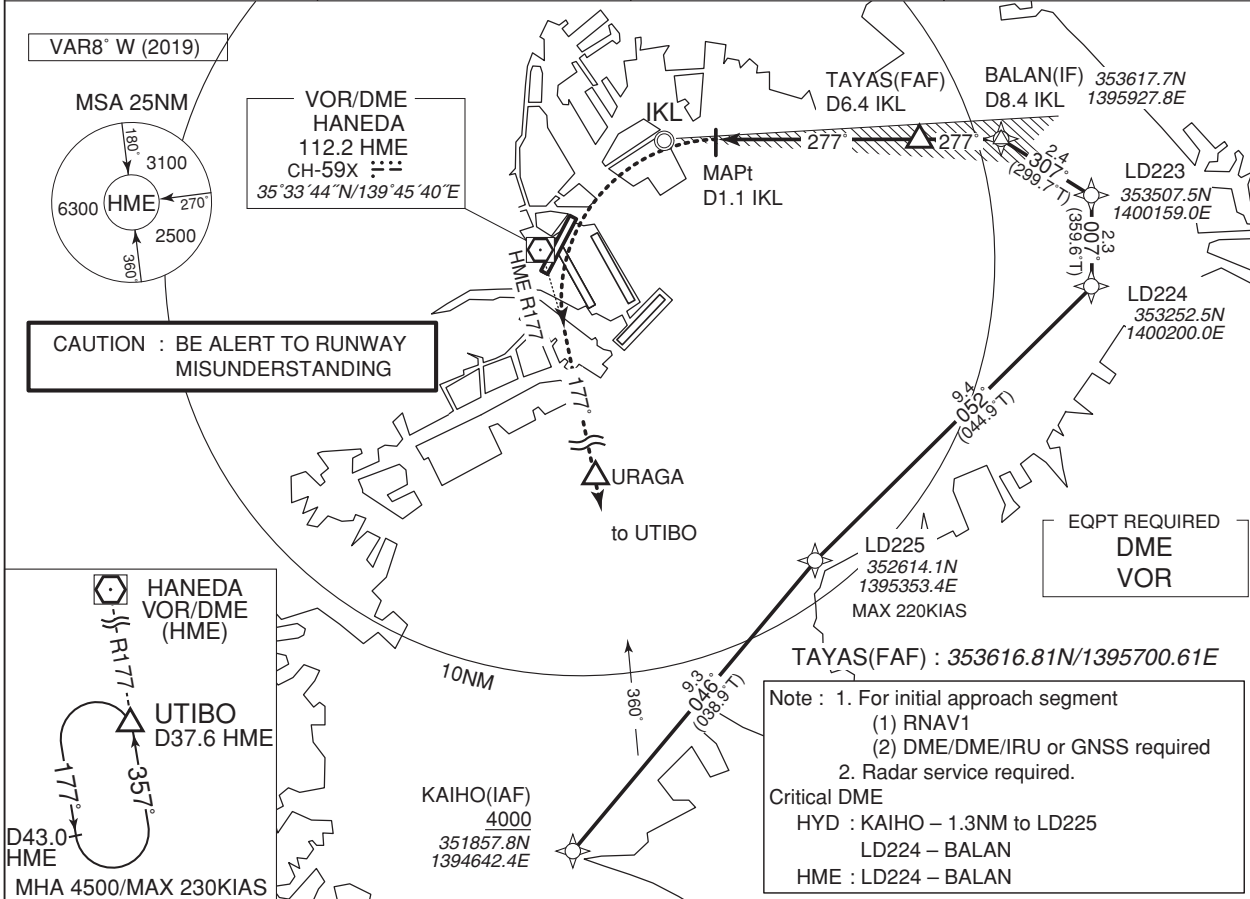

DME to IKL	1.1	6.4	8.4
NM to THR	3.8	9.1	11.1

MINIMA	THR elev. 35	AD elev. 21
CAT	MDA(H)	VIS
A		
B	1000 (979)	6000
C		
D		

**Do Not turn left until D1.1 IKL**  
**SO AS NOT TO MISUNDERSTAND THE RUNWAY**

MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.

CHANGE : Update


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Y RWY22

Visual Prescribed Track for LDA Y RWY22

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.  
 Note : Remain on the LDA until passing MAPt so as not to penetrate the NTZ, and to avoid the RWY23 traffic.

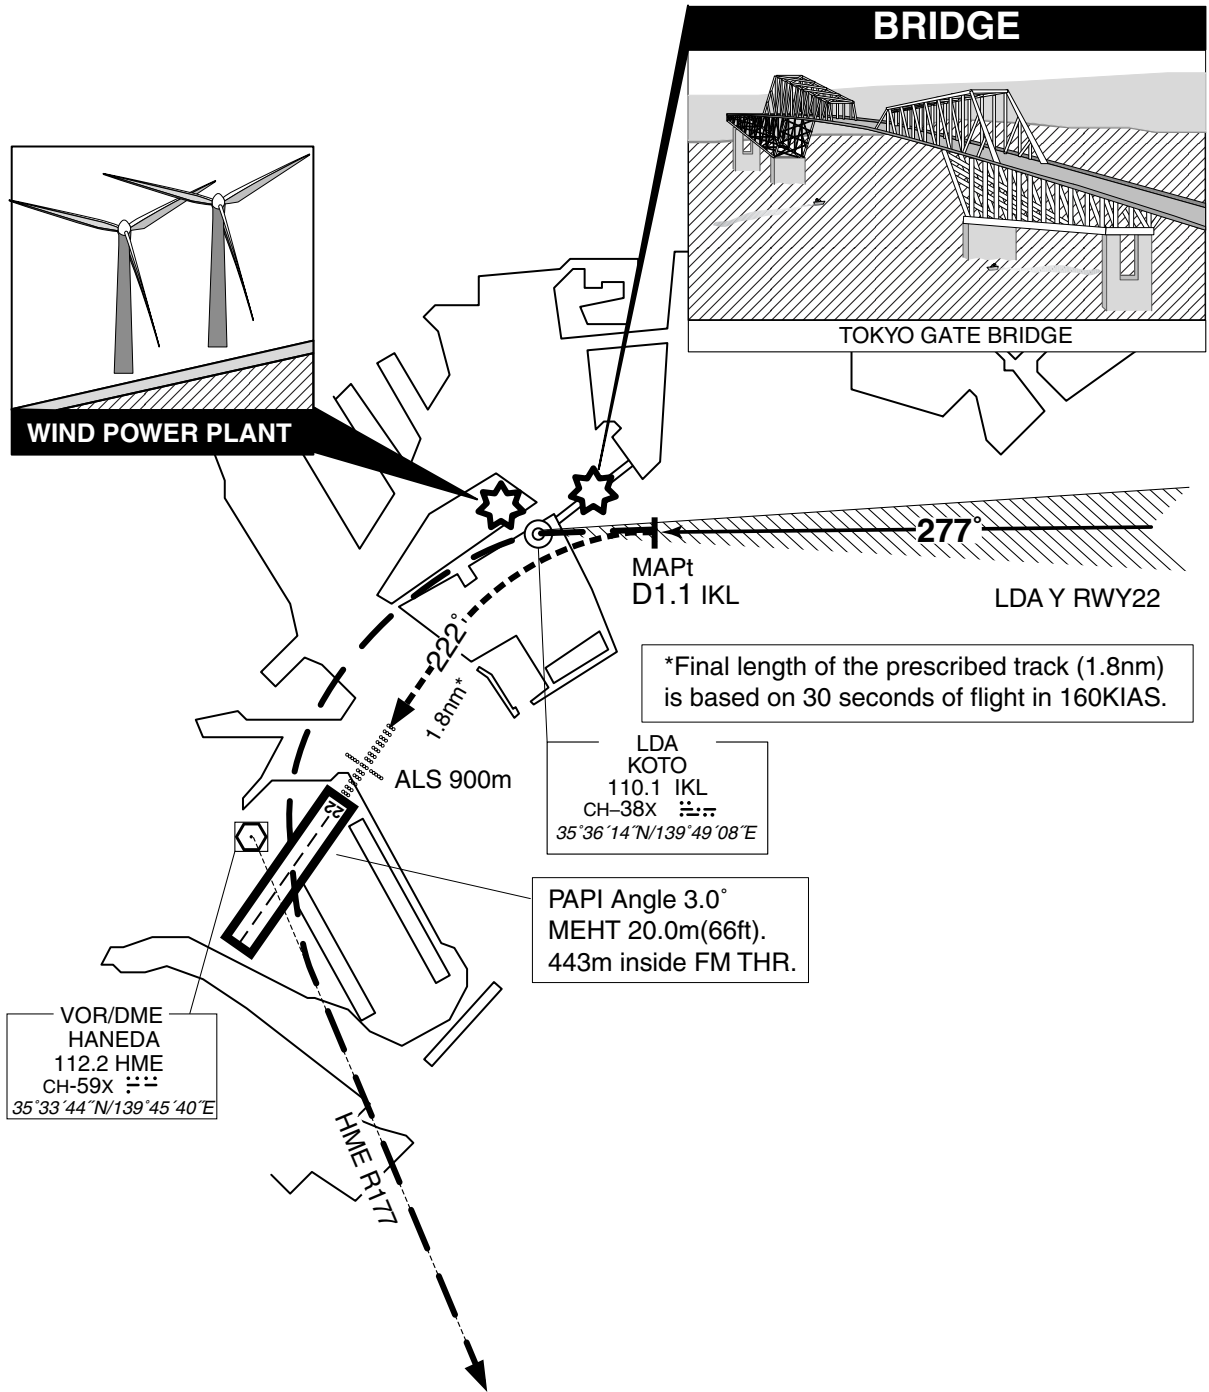

In case of GO AROUND, pilot should report ATC as soon as practicable.  
 Until receiving ATC instructions, aircraft turn left for joining HME R177 and missed approach procedure.





INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA X RWY22

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	LDA - LOC 110.1 IKL LDA-DME CH-38X	TOKYO TOWER 118.575 - 118.1 - 124.35 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

Simultaneous approach authorized with RWY23(LDA)

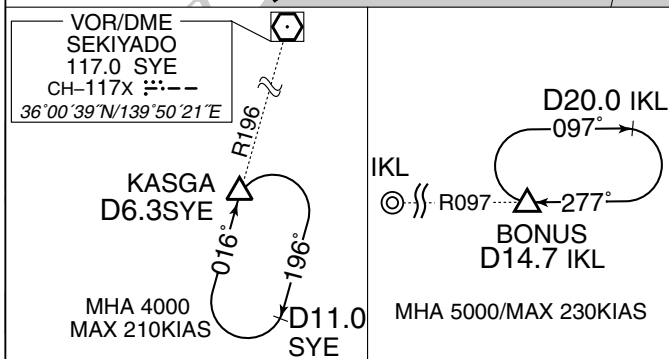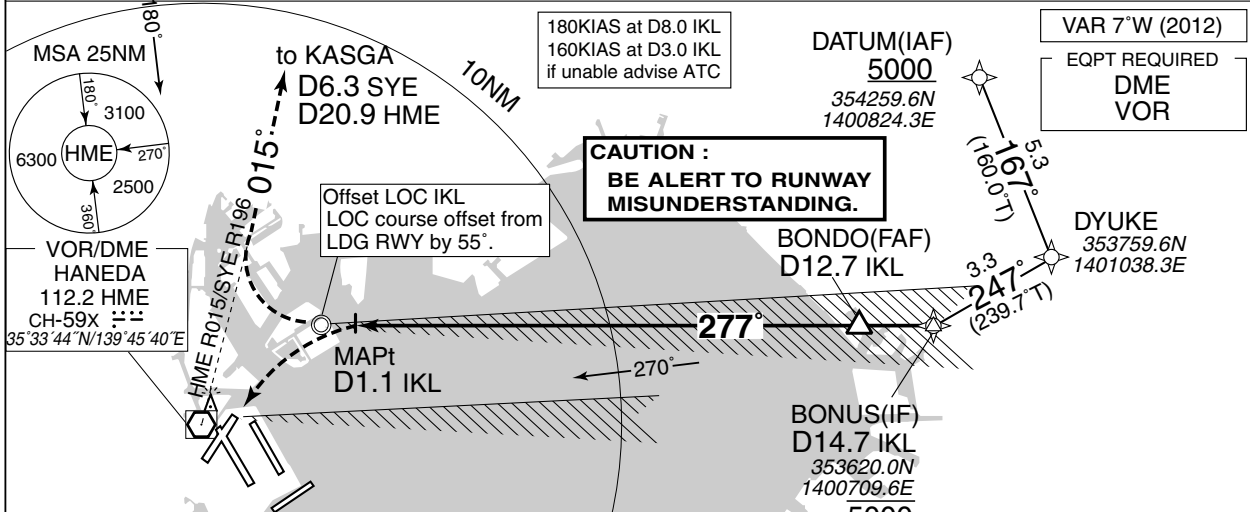


BOND0(FAF) : 353619.28N/1400442.48E  
 Note : 1. For Initial approach segment from over DATUM  
 (1) RNAV 1  
 (2) DME/DME/IRU or GNSS required  
 2. Radar service required.

MISSED APPROACH

At MAPt, turn right climb to 4000FT via HME R015 /SYE R196 to KASGA and hold.  
 Contact TOKYO APP.

Timing not authorized for defining the MAPt.

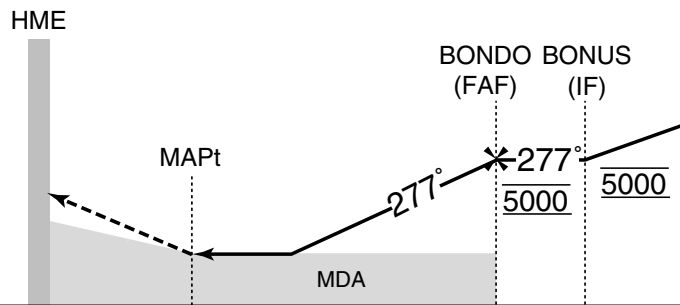

DME to IKL	1.1	12.7	14.7
NM to THR	3.8	15.4	17.4

Missed APCH climb gradient MNM 4.0%

MINIMA	THR elev. 35	AD elev. 21
CAT	MDA(H)	VIS
A	1000 (979)	6000
B		
C		
D		

**Do Not turn left  
until D1.1 IKL**  
 SO AS NOT TO MISUNDERSTAND  
 THE RUNWAY

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
 MINIMA APPLICATION CRITERIA in AD1.6.10.1.4 are not applicable.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA X RWY22

Visual Prescribed Track for LDA X RWY22

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.  
 Note : Remain on the LDA until passing MAPt so as not to penetrate the NTZ, and to avoid the RWY23 traffic.

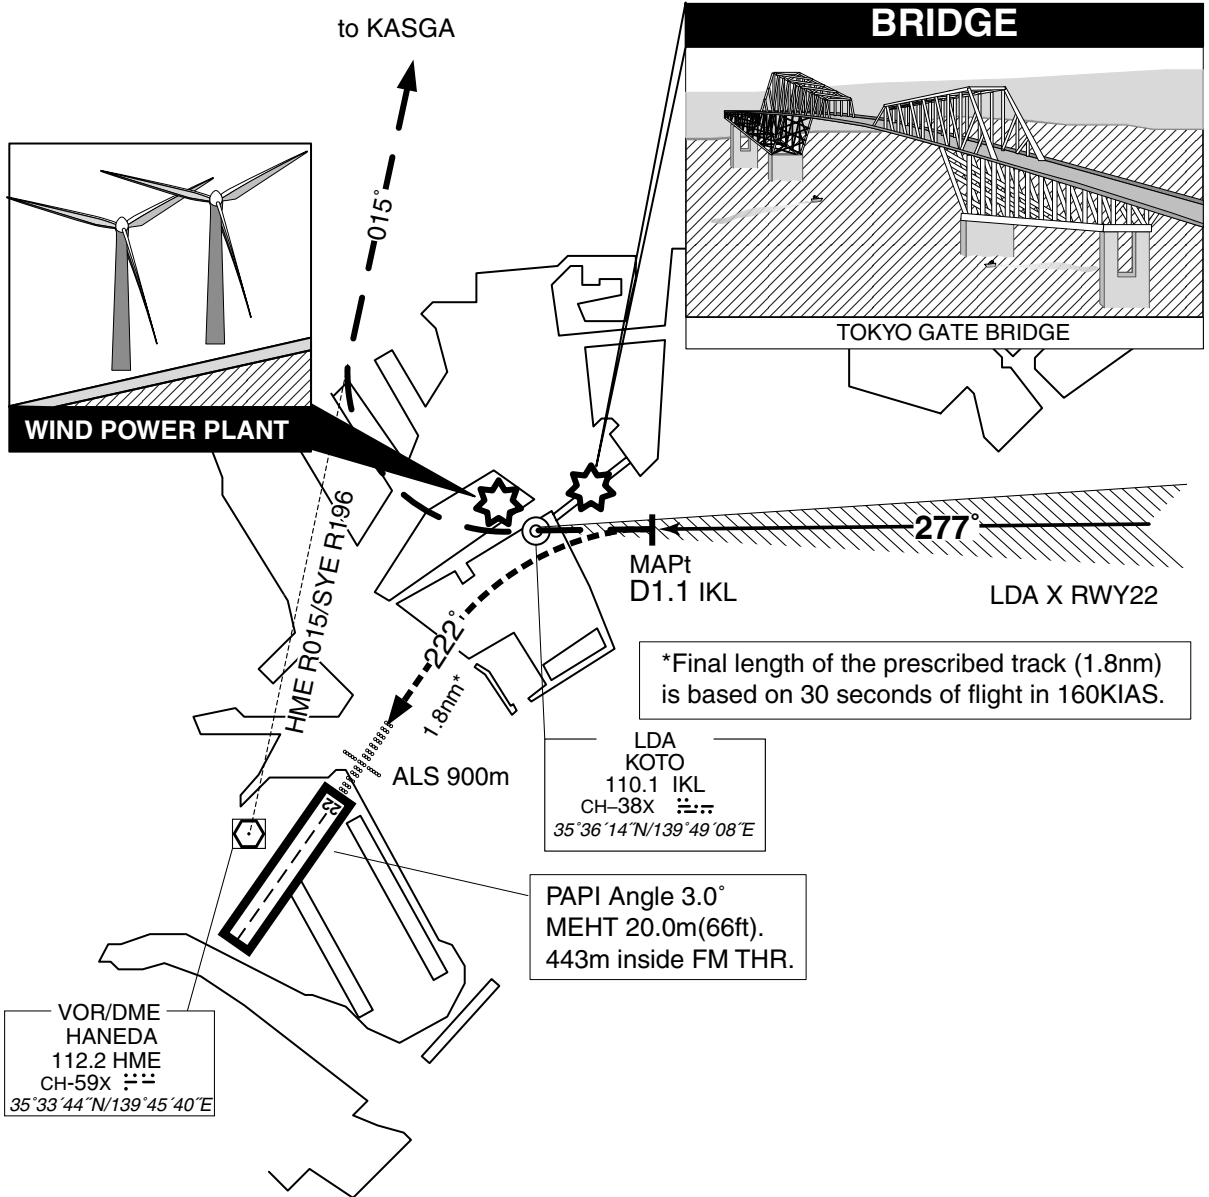

In case of GO AROUND, pilot should report ATC as soon as practicable.  
 Until receiving ATC instructions, aircraft turn right for joining HME R015/SYE R196 and missed approach procedure.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA W RWY22

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	LDA - LOC 110.1 IKL LDA-DME CH-38X	TOKYO TOWER 118.575 - 118.1 - 124.35 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------


Simultaneous approach authorized with RWY23(LDA)

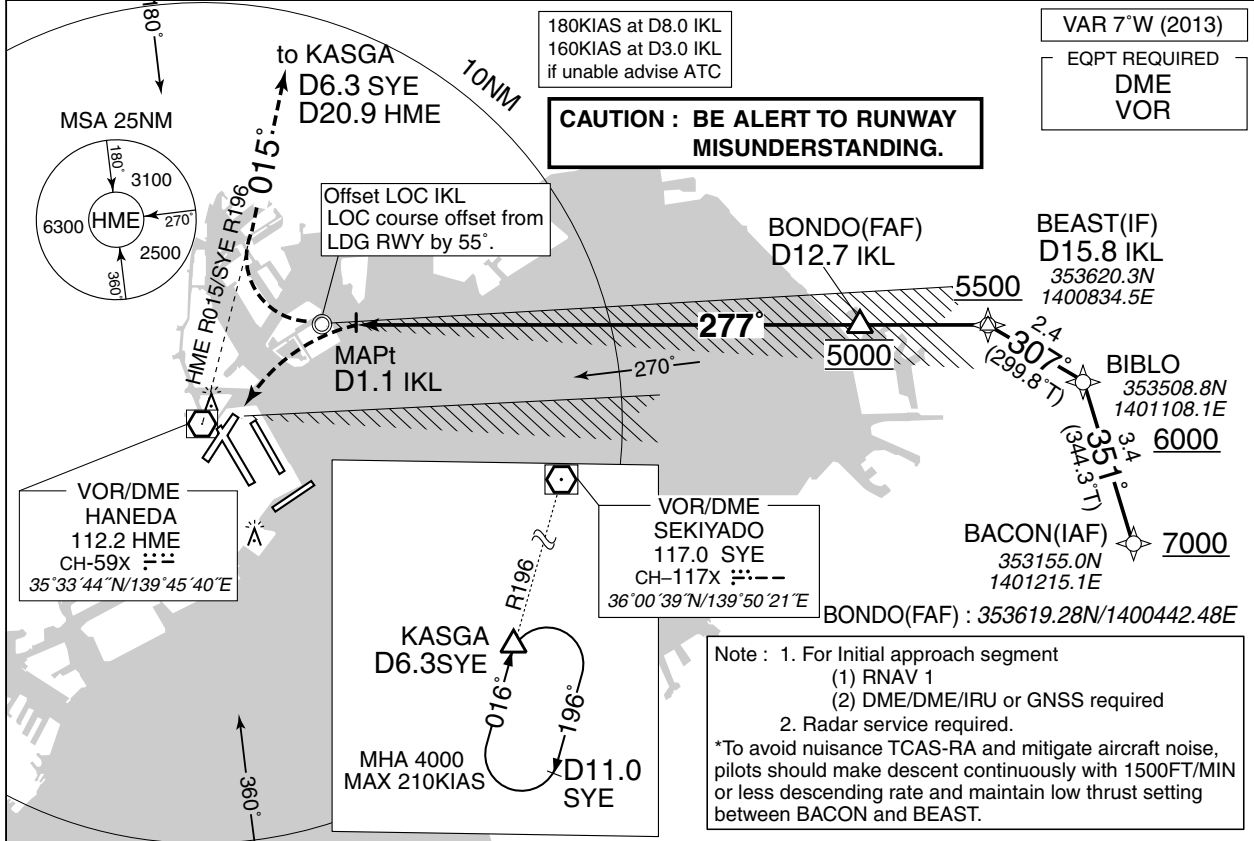

MISSED APPROACH

At MAPt, turn right climb to 4000FT via HME R015 /SYE R196 to KASGA and hold.  
Contact TOKYO APP.

Timing not authorized for defining the MAPt.

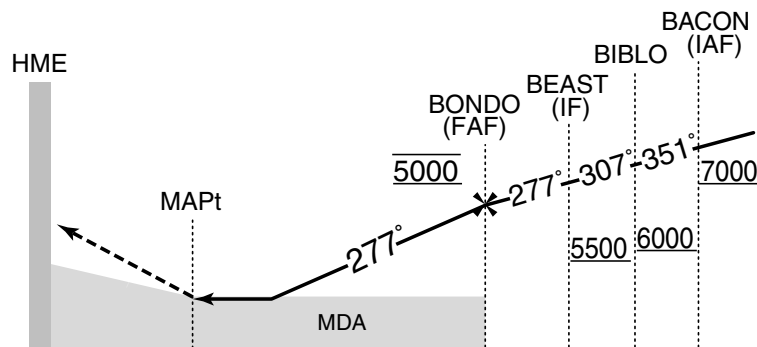

DME to IKL	1.1	12.7	15.8		
NM to THR	3.8	15.4	18.5	20.9	24.3

Missed APCH climb gradient MNM 4.0%

MINIMA	THR elev. 35	AD elev. 21
CAT	MDA(H)	VIS
A	1000 (979)	6000
B		
C		
D		

**Do Not turn left  
until D1.1 IKL**

**SO AS NOT TO MISUNDERSTAND  
THE RUNWAY**

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
MINIMA APPLICATION CRITERIA in AD1.6.10.1.4 are not applicable.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA W RWY22

Visual Prescribed Track for LDA W RWY22

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.  
 Note : Remain on the LDA until passing MAPt so as not to penetrate the NTZ, and to avoid the RWY23 traffic.

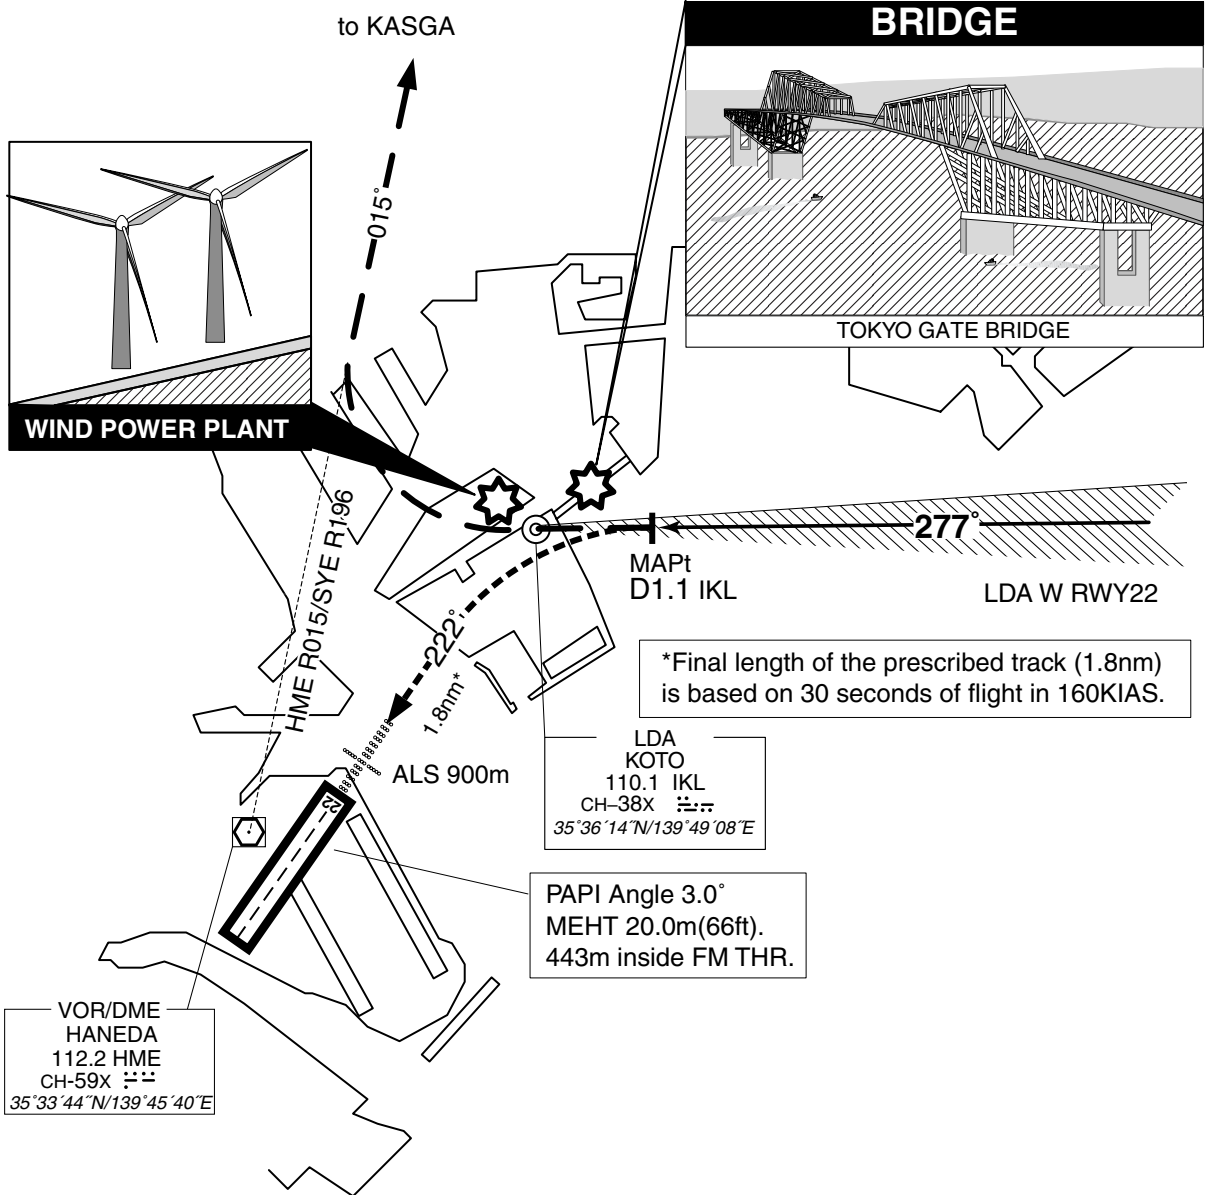



In case of GO AROUND, pilot should report ATC as soon as practicable.  
 Until receiving ATC instructions, aircraft turn right for joining HME R015/SYE R196 and missed approach procedure.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS Z RWY23

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 110.5 ITD ILS-GP 329.6 ILS-DME CH-42X	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

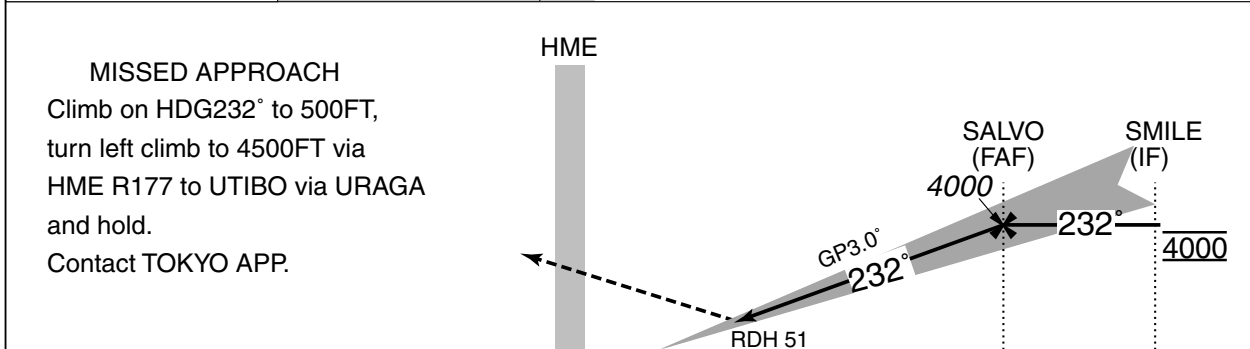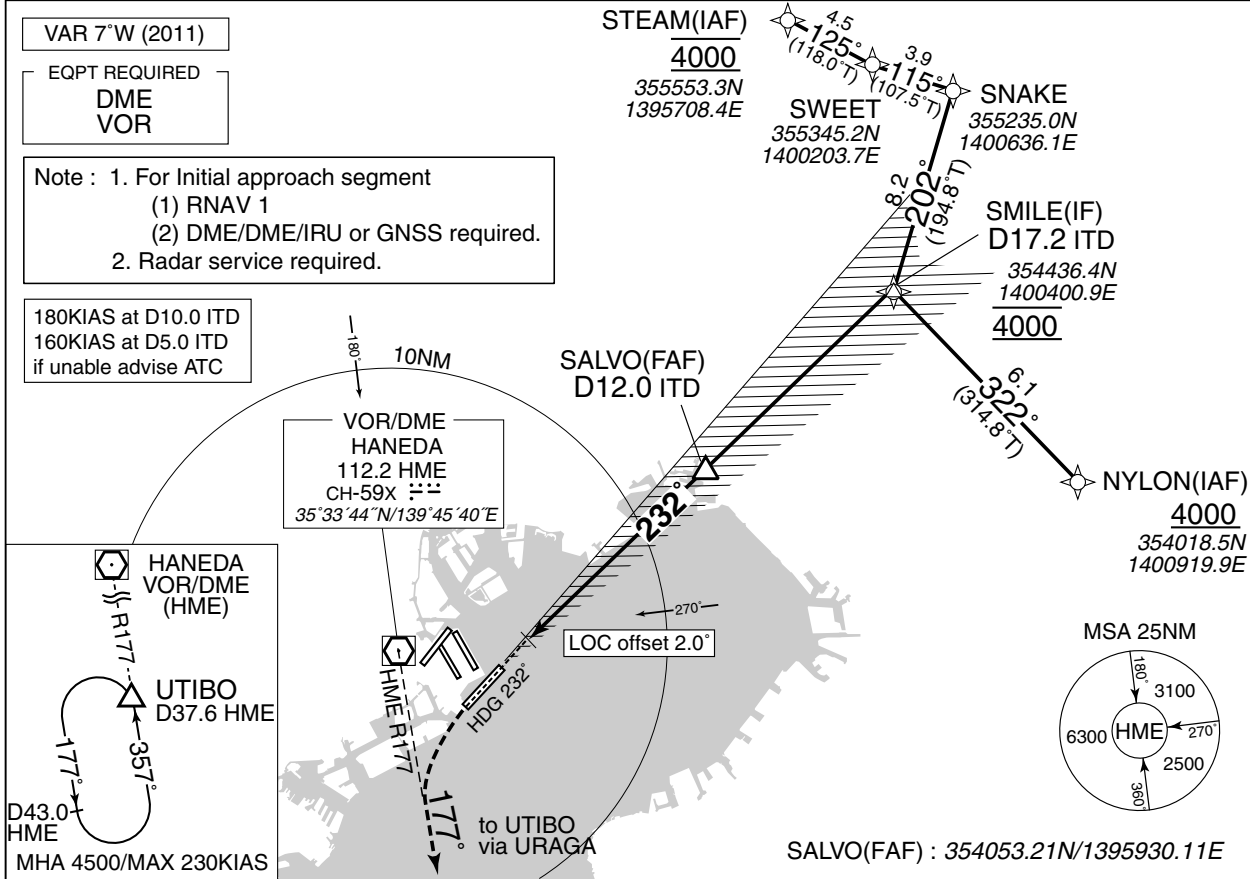

DME to ITD	0.2	12.0	17.2
NM to THR	0	11.8	17.1

CAT	THR elev. 55		AD elev. 21	
	DA(H)	RVR/CMV	MDA(H)	VIS
A	383 (328)	800	730 (709)	1600
B				2400
C				3200
D				


Circling is not authorized during the night time, except counterclockwise circling to RWY22, RWY16R/16L and clockwise circling to RWY34R/34L.

**INSTRUMENT APPROACH CHART**


RJTT / TOKYO INTL

LOC Z RWY23

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 110.5 ITD ±.. ILS-DME CH-42X	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

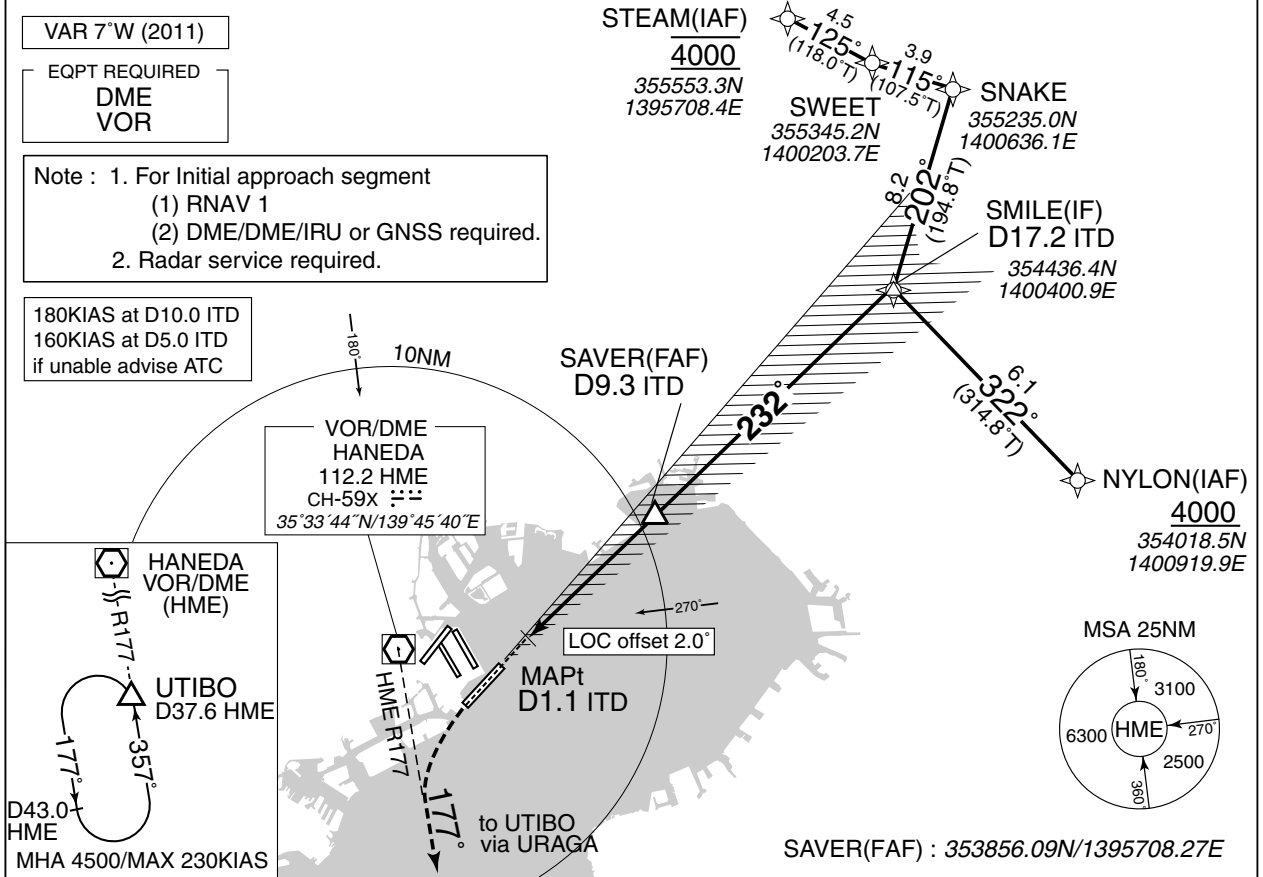

	NM to ITD	MAPt	2	3	4	5	6	7	8	9	FAF
	ALT (3.0° APCH Path)	-	683	1002	1320	1639	1957	2276	2594	2912	-

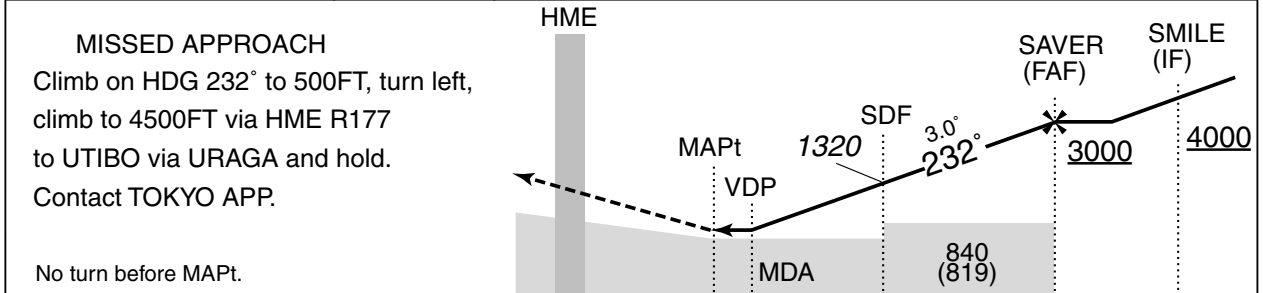

DME to ITD	0.2	1.1	1.3	4.0	9.3	17.2
NM to THR	0	0.9	1.1	3.8	9.1	17.1


MINIMA		THR elev. 55	AD elev. 21		
CAT	LOC		CIRCLING		
	MDA(H)	RVR/CMV	MDA(H)	VIS	
A	440 (419)	900	730 (709)	1600	
B		1000		2400	
C				1400	3200
D					

Circling is not authorized during the night time, except counterclockwise circling to RWY22, RWY16R/16L and clockwise circling to RWY34R/34L.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


ILS Y or LOC Y RWY23

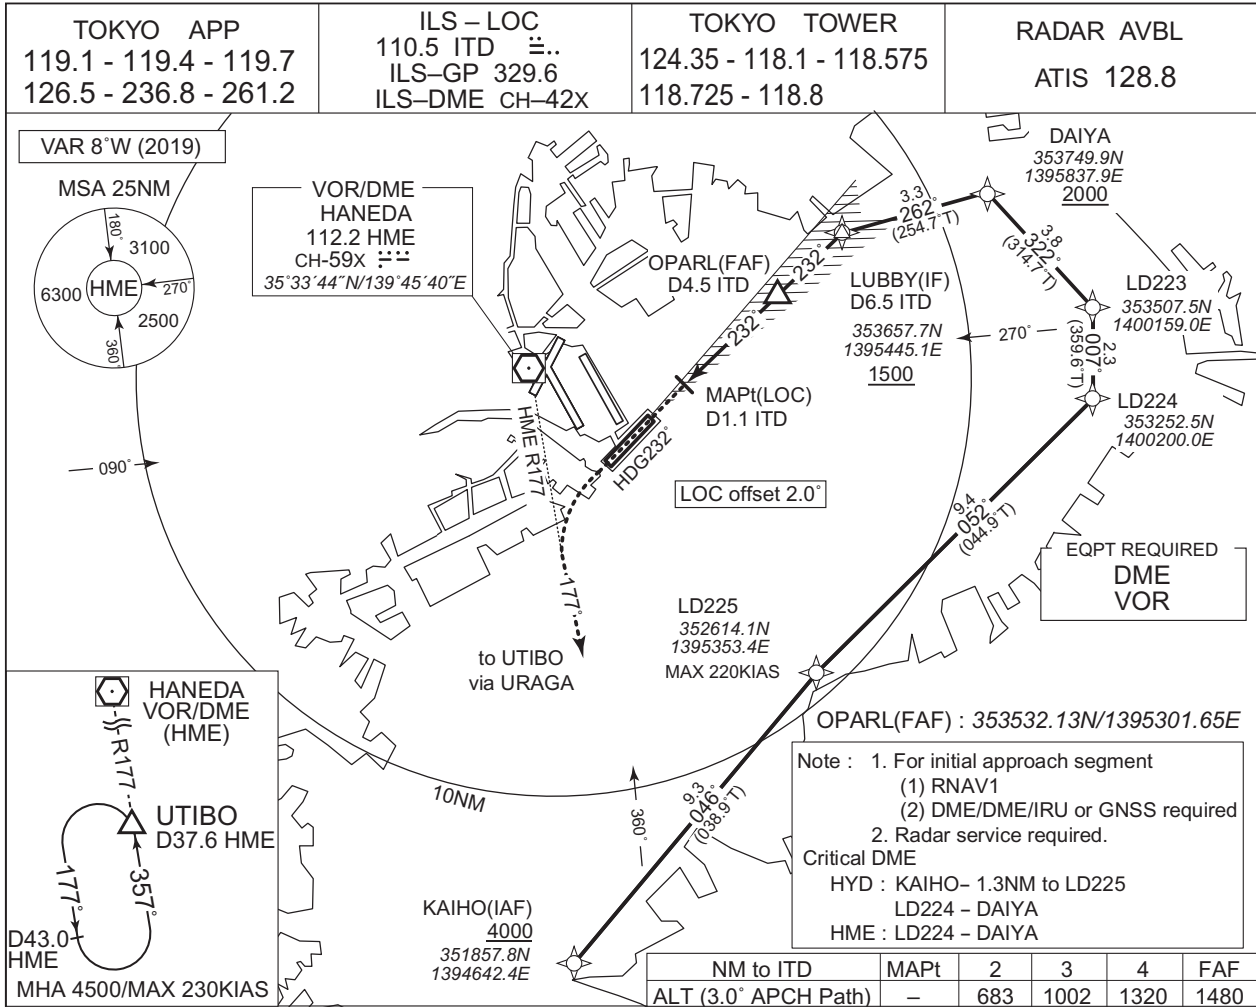

MISSED APPROACH

Climb on HDG232° to 500FT, turn left, climb to 4500FT via HME R177 to UTIBO via URAGA and hold. Contact TOKYO APP.

Timing not authorized for defining the MAPt. No turn before MAPt.

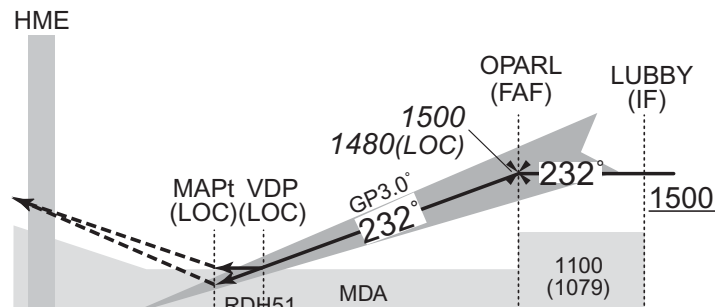

DME to ITD	0.2	1.1	1.3	4.5	6.5
NM to THR	0	0.9	1.1	4.3	6.3

MINIMA		THR elev. 55		AD elev. 21		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H) VIS	
A	383 (328)	800	440 (419)	900	730 (709) 1600	
B				1000		
C				1400		2400
D						3200

Circling is not authorized during the night time, except counterclockwise circling to RWY22, RWY16R/16L and clockwise circling to RWY34R/34L.



CHANGE: Description of GP angle.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Z RWY23

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	LDA - LOC 108.5 ITL 3.. LDA-DME CH-22X	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

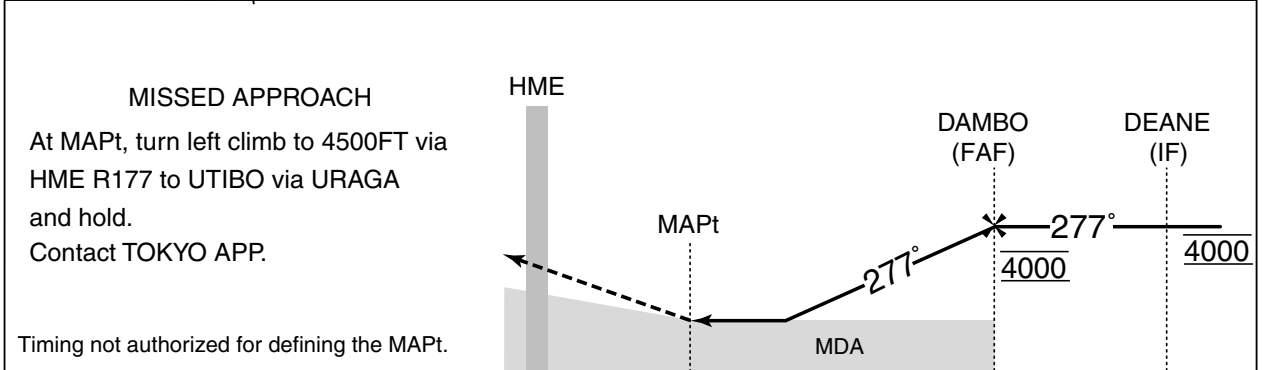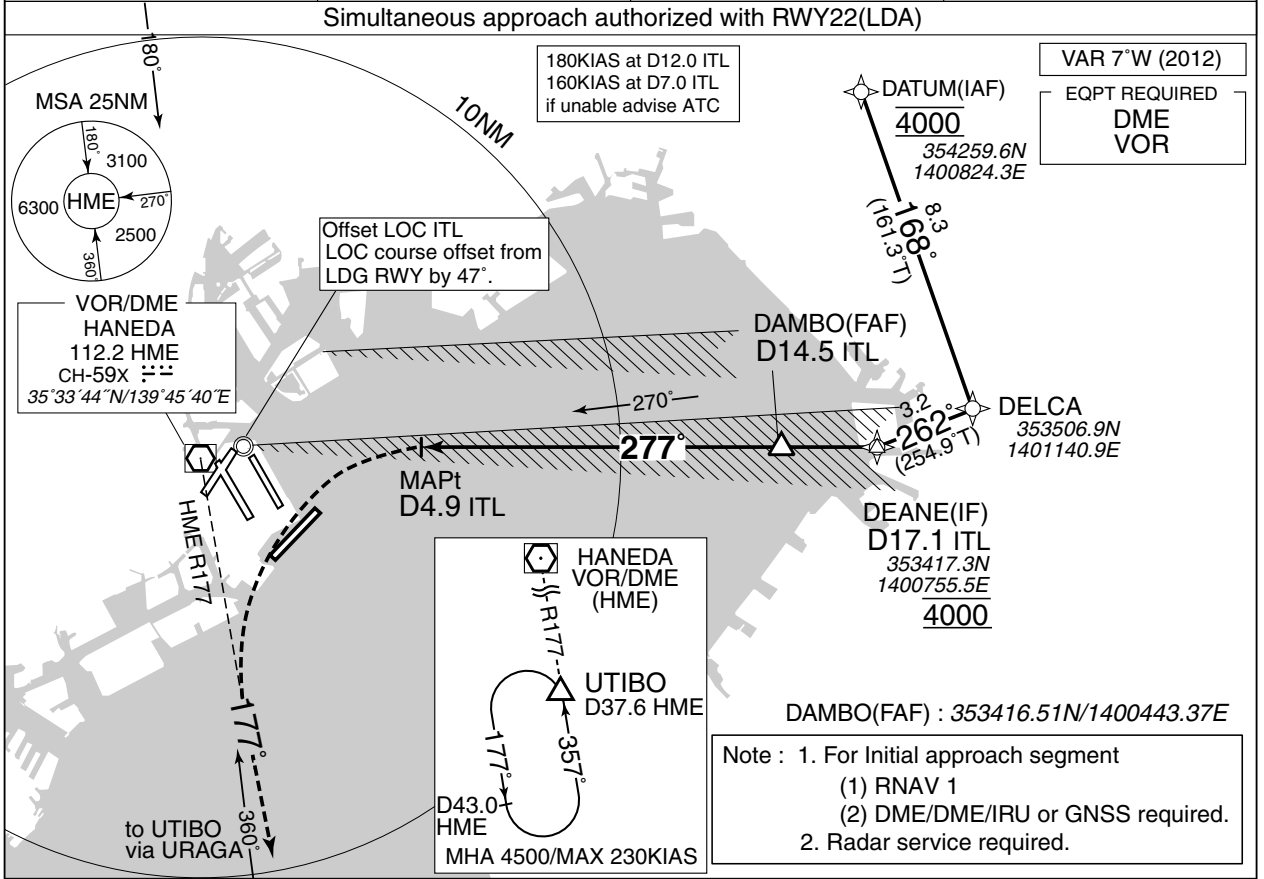

DME to ITL	4.9	14.5	17.1
NM to THR	3.4	13.0	15.6

MINIMA	THR elev. 55	AD elev. 21
CAT	MDA(H)	VIS
A	1000 (979)	6000
B		
C		
D		

MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.




INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Z RWY23

Visual Prescribed Track for LDA Z RWY23

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

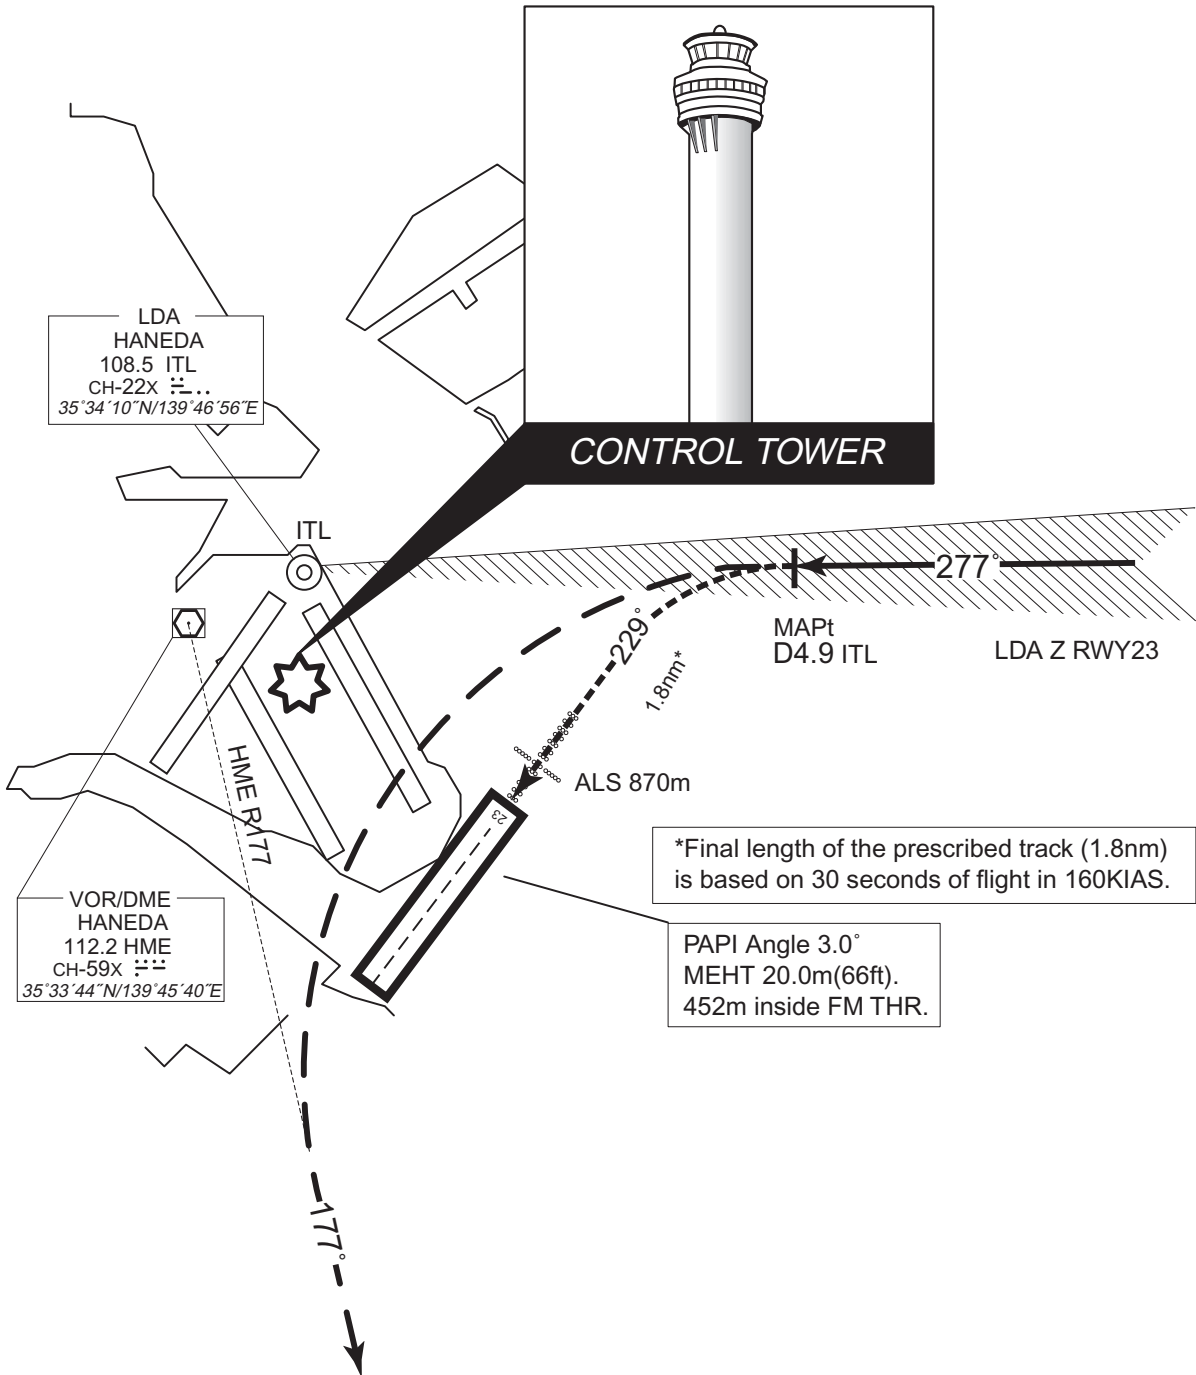



CHANGE : Correction of misdescription (ITL COORD).

In case of GO AROUND, pilot should report ATC as soon as practicable.  
Until receiving ATC instructions, aircraft turn left HDG 229° for joining HME R177 and missed approach procedure.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Y RWY23

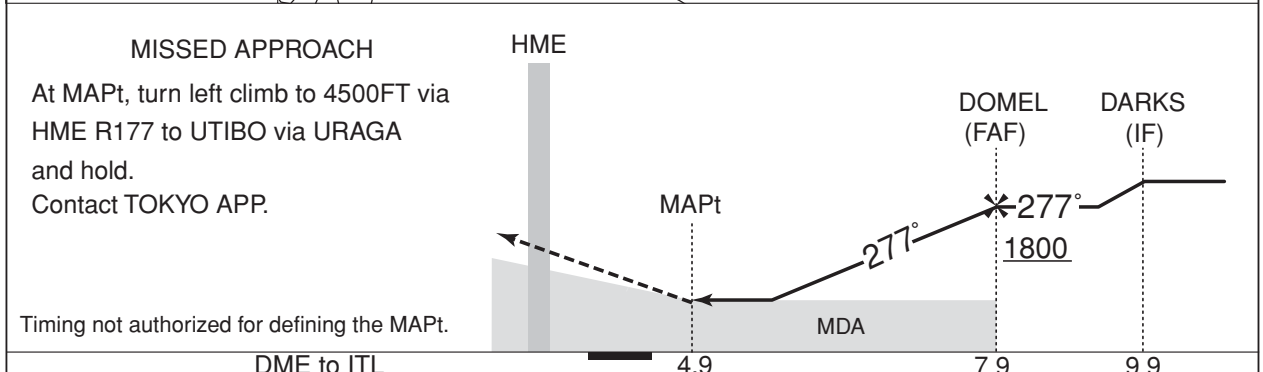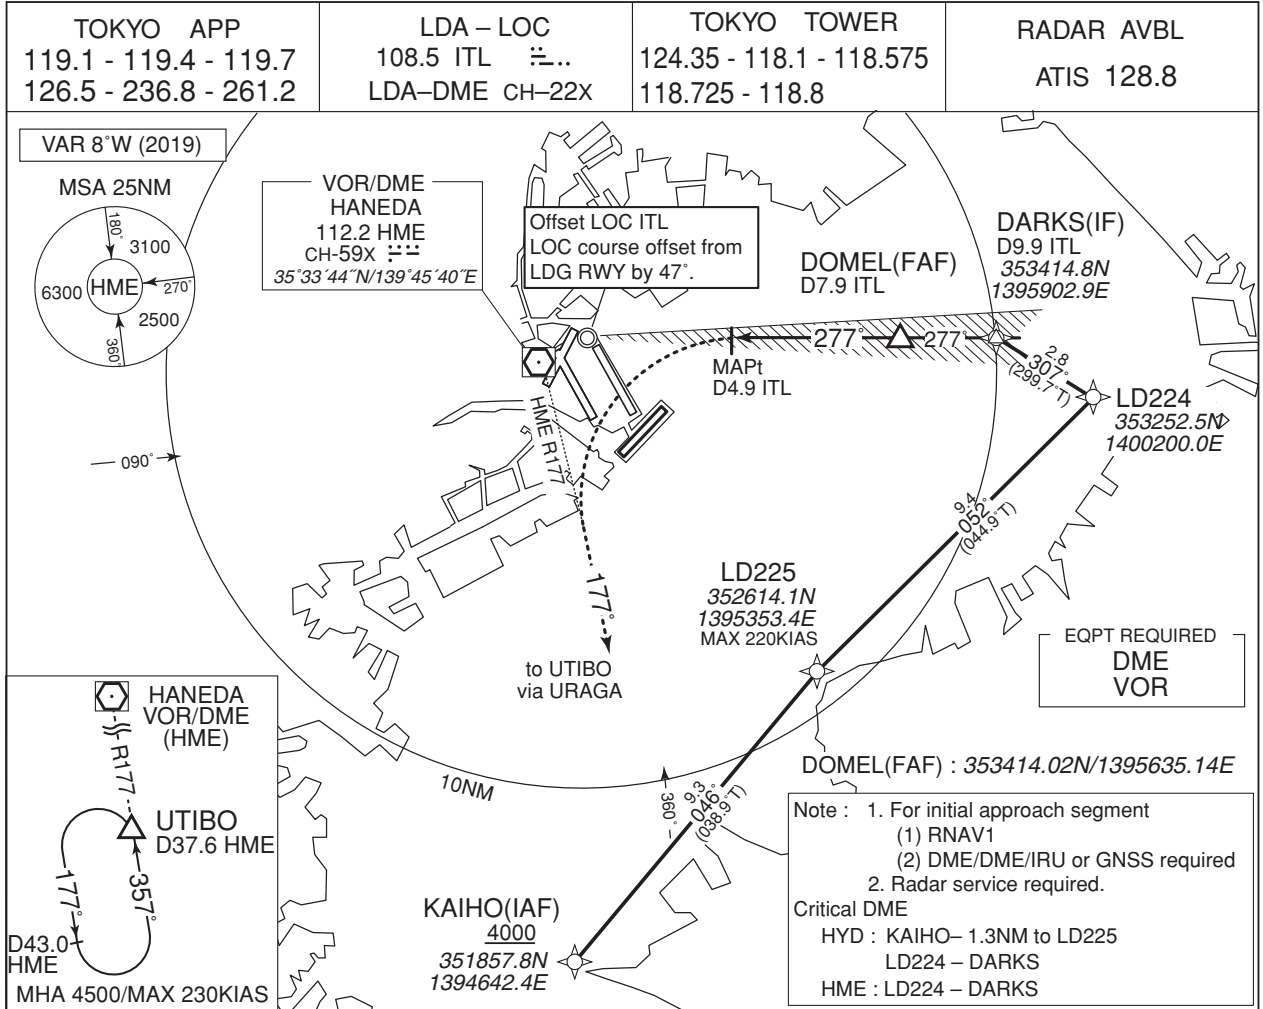

<b>DME to ITL</b>	4.9	7.9	9.9
NM to THR	3.4	6.4	8.4

<b>MINIMA</b>	<b>THR elev. 55</b>	<b>AD elev. 21</b>
<b>CAT</b>	<b>MDA(H)</b>	<b>VIS</b>
A		
B	1000 (979)	6000
C		
D		

CHANGE : Update

MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Y RWY23

Visual Prescribed Track for LDA Y RWY23

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

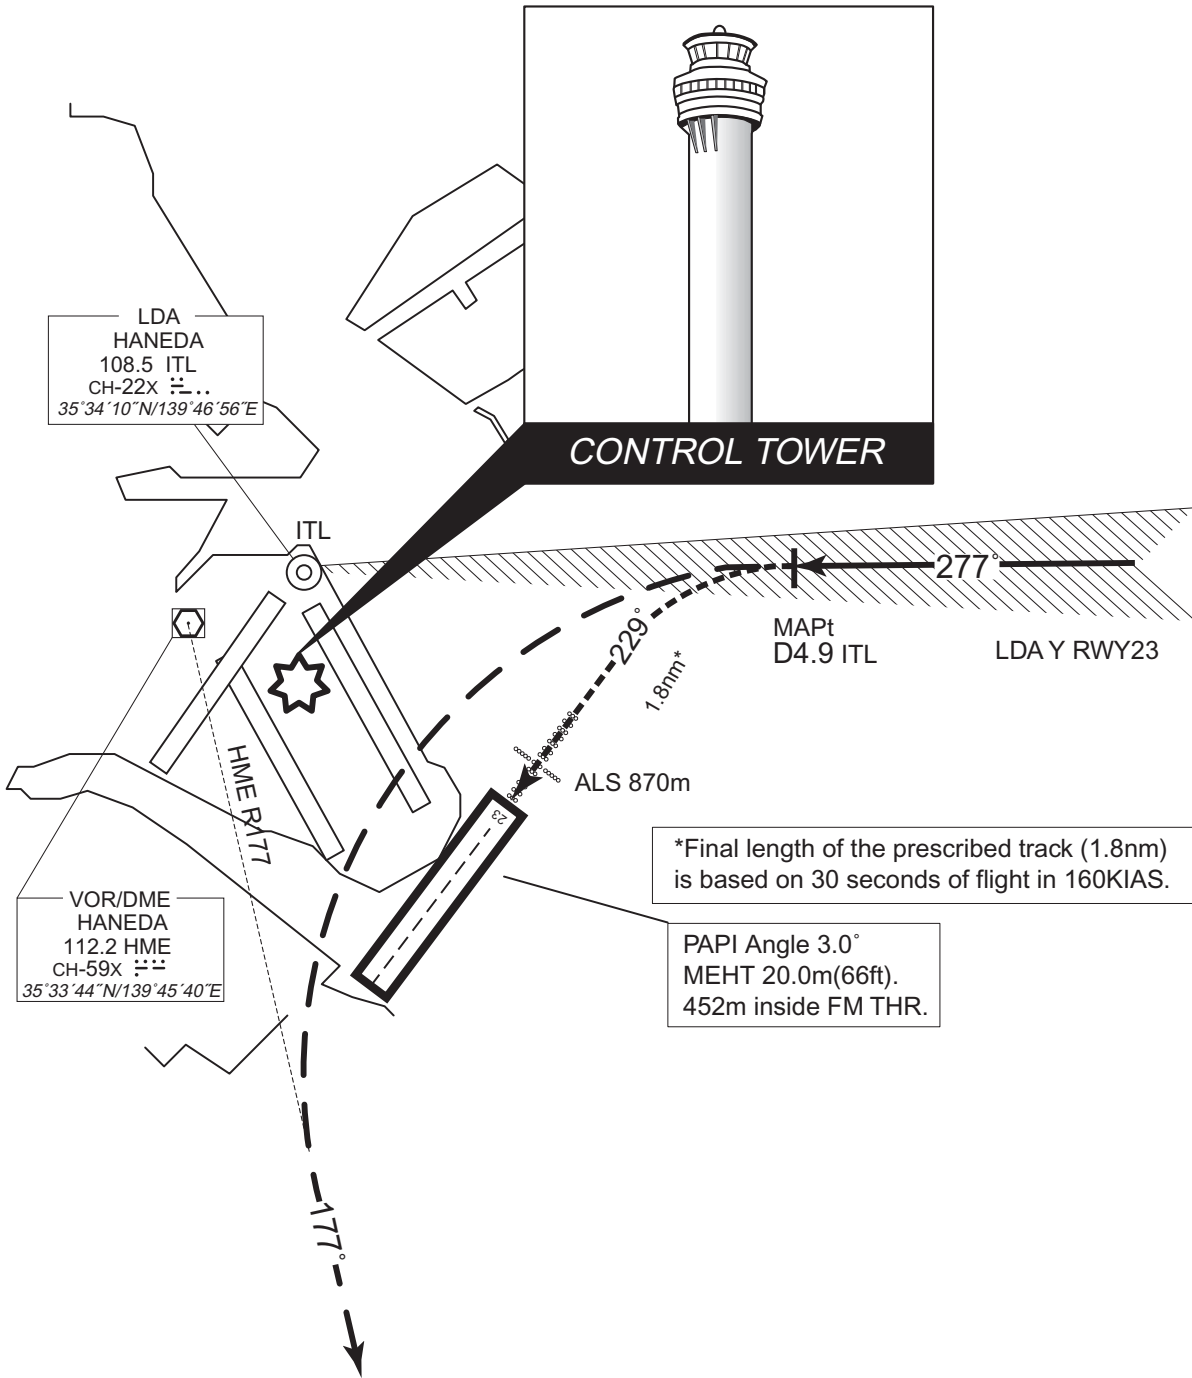

CHANGE : Correction of misdescription (ITL COORD).

\*Final length of the prescribed track (1.8nm) is based on 30 seconds of flight in 160KIAS.

PAPI Angle 3.0°  
MEHT 20.0m(66ft).  
452m inside FM THR.

In case of GO AROUND, pilot should report ATC as soon as practicable.  
Until receiving ATC instructions, aircraft turn left HDG 229° for joining HME R177 and missed approach procedure.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA X RWY23

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	LDA - LOC 108.5 ITL 3.. LDA-DME CH-22X	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------


Simultaneous approach authorized with RWY22(LDA)

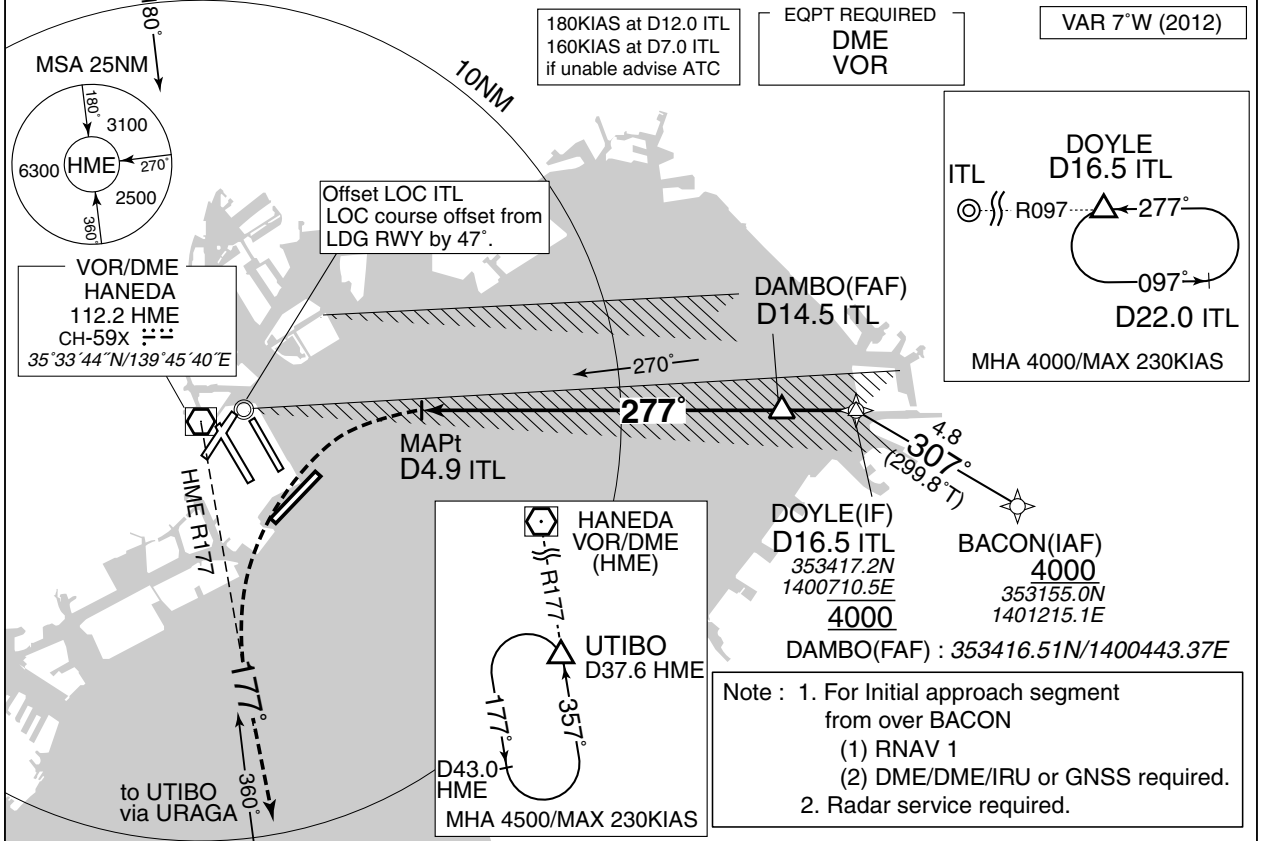

MISSED APPROACH

At MAPt, turn left climb to 4500FT via HME R177 to UTIBO via URAGA and hold.  
Contact TOKYO APP.

Timing not authorized for defining the MAPt.

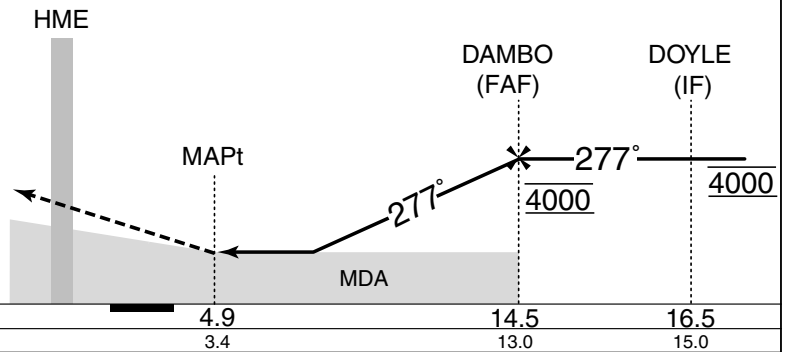

MINIMA	THR elev. 55	AD elev. 21
CAT	MDA(H)	VIS
A	1000 (979)	6000
B		
C		
D		

MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA X RWY23

Visual Prescribed Track for LDA X RWY23

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

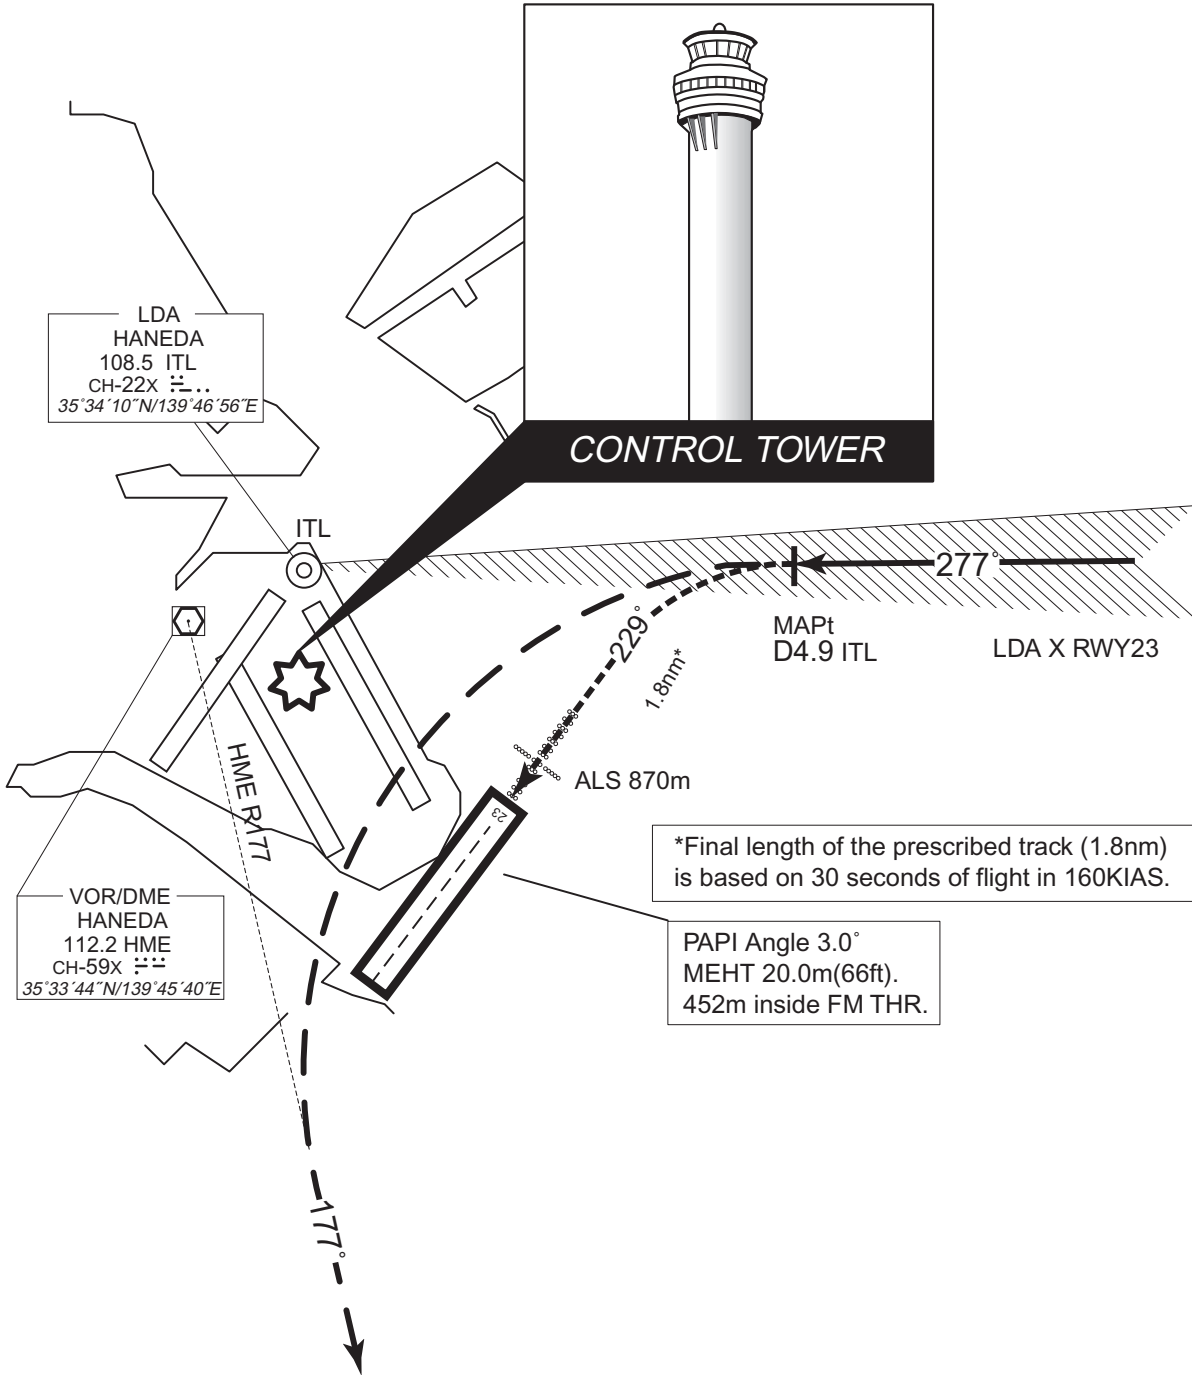

CHANGE : Correction of misdescription (ITL COORD).

In case of GO AROUND, pilot should report ATC as soon as practicable.  
Until receiving ATC instructions, aircraft turn left HDG 229° for joining HME R177 and missed approach procedure.




INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA W RWY23

Visual Prescribed Track for LDA W RWY23

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

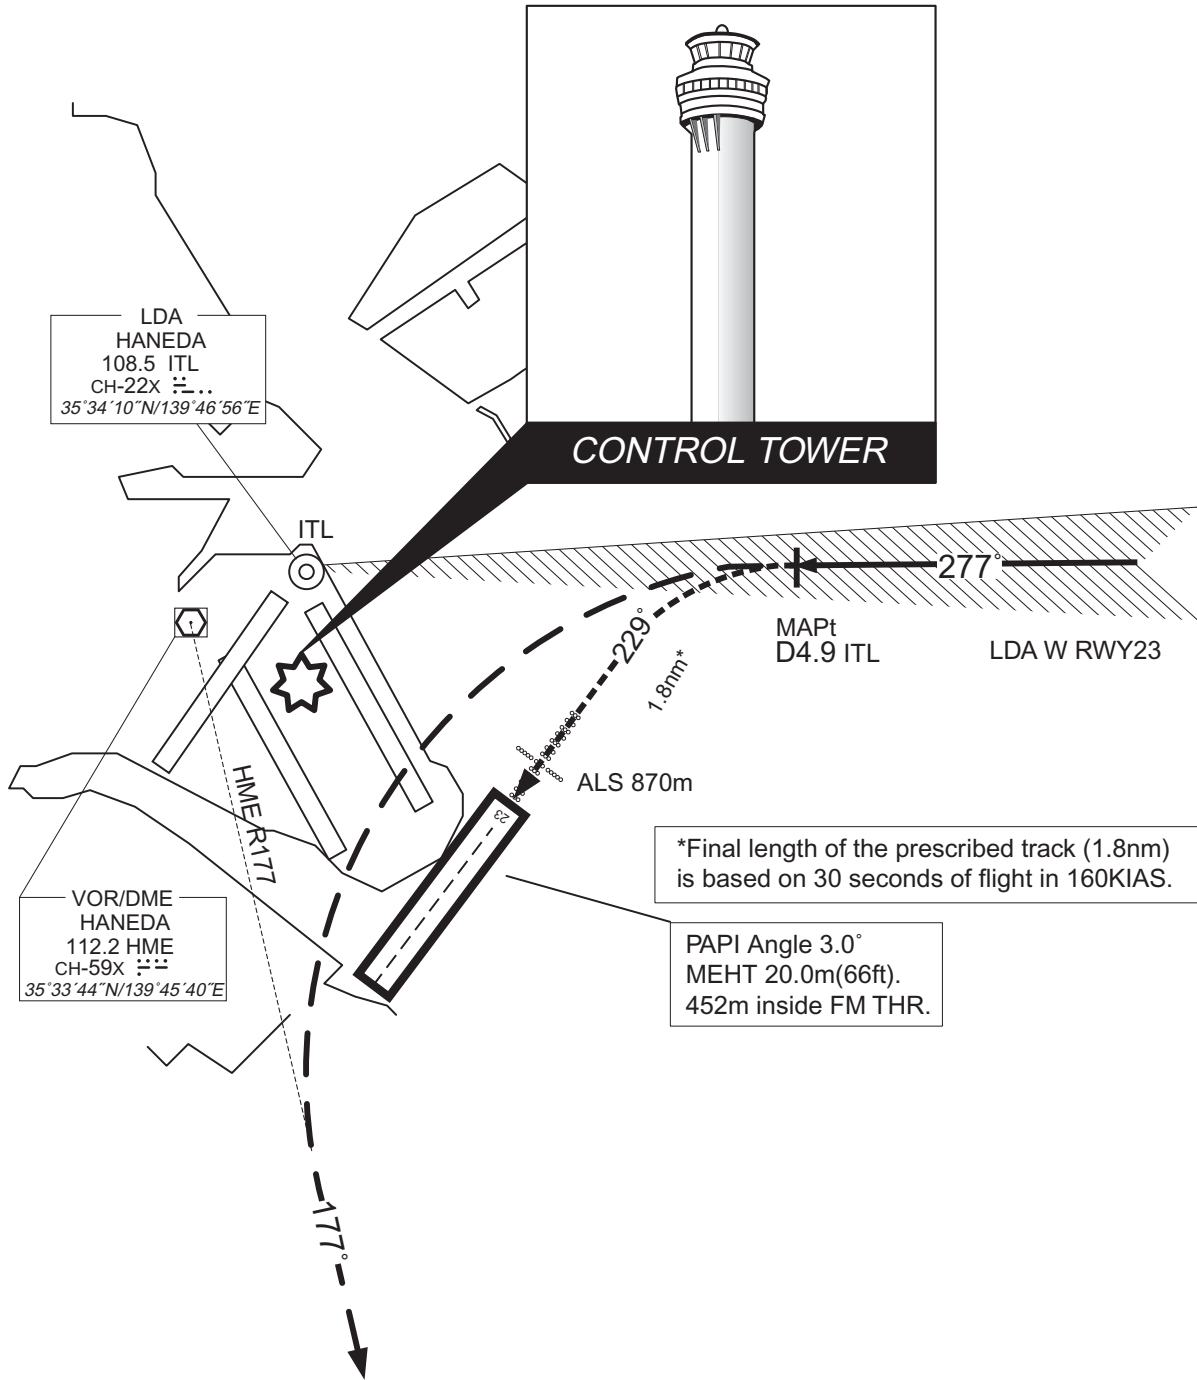

CHANGE : Correction of misdescription (ITL COORD).

\*Final length of the prescribed track (1.8nm) is based on 30 seconds of flight in 160KIAS.

PAPI Angle 3.0°  
MEHT 20.0m(66ft).  
452m inside FM THR.

In case of GO AROUND, pilot should report ATC as soon as practicable.  
Until receiving ATC instructions, aircraft turn left HDG 229° for joining HME R177 and missed approach procedure.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


RNP RWY23(AR)

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	RNP AR RF required.	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	------------------------	--	--------------------------

For uncompensated Baro-VNAV systems, procedure not authorized below 0°C / above 45°C

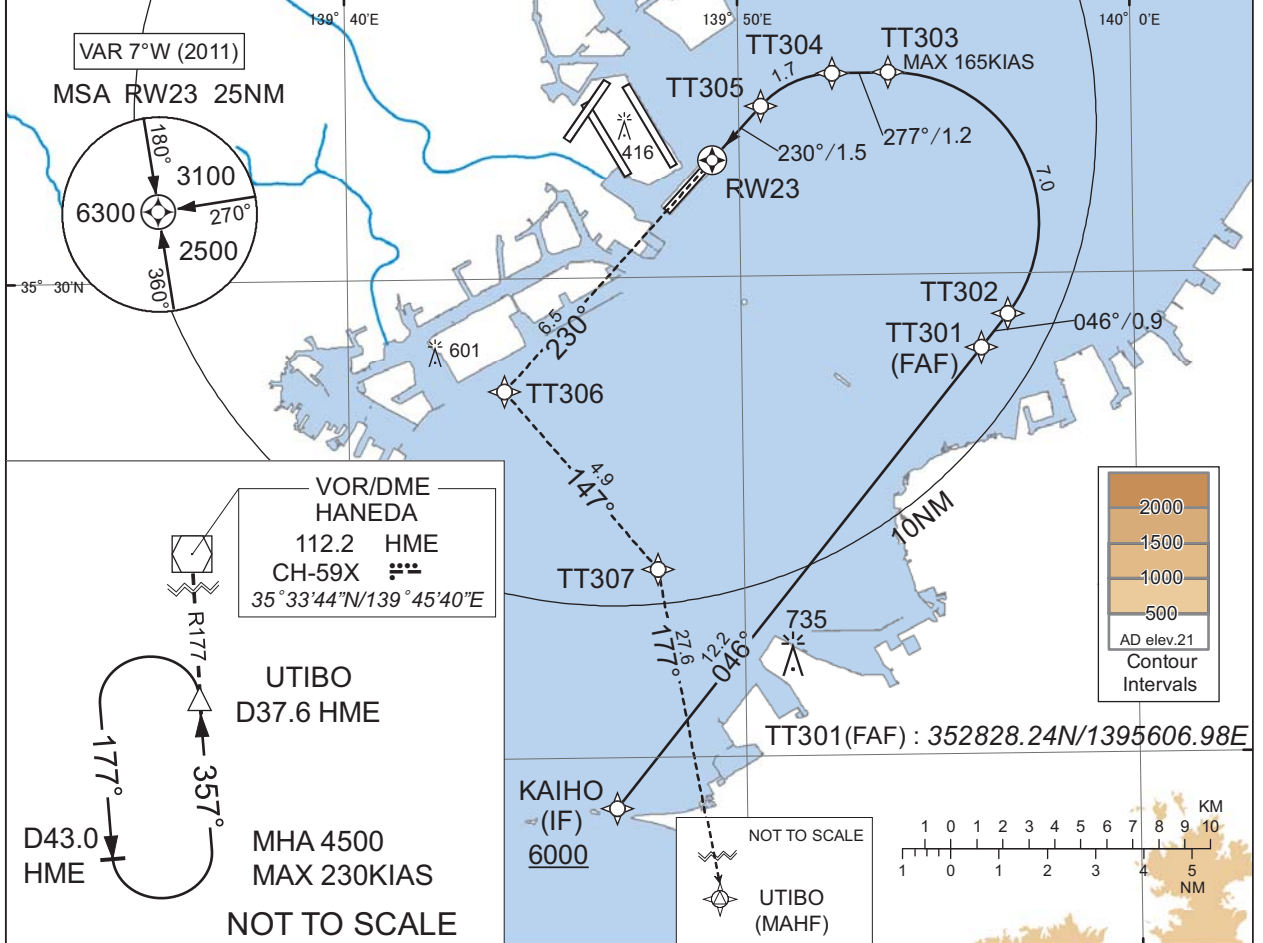

CHANGE : PROC renamed. Requirement for RNP.

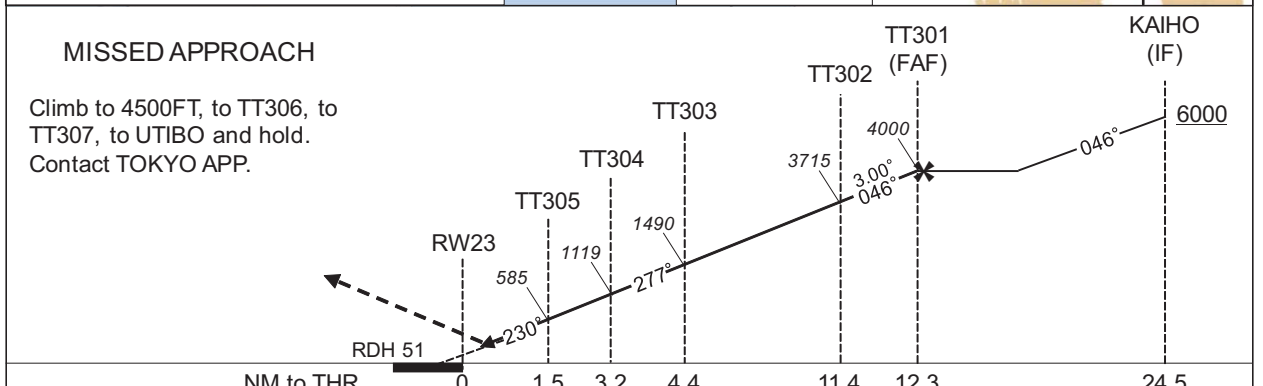

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev. 55	AD elev. 21
CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	-	-
B	-	-
C	330(275)	800
D	-	1200

**Authorization Required**

MINIMA with Missed APCH climb gradient of 2.5% are not established.



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

RNP RWY23(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	KAIHO	-	-	-7.2	-	-	+6000	-	-	-
002	TF	TT301	-	046 (038.8)	-7.2	12.2	-	4000	-	-	1.0
003	TF	TT302	-	046 (038.8)	-7.2	0.9	-	3715	-	-3.00	0.3
004	RF Center: TTRF1 r=3.10NM	TT303	-	-	-7.2	7.0	L	1490	-165	-3.00	0.3
005	TF	TT304	-	277 (269.6)	-7.2	1.2	-	1119	-	-3.00	0.3
006	RF Center: TTRF2 r=2.00NM	TT305	-	-	-7.2	1.7	L	585	-	-3.00	0.3
007	TF	RW23	Y	230 (222.5)	-7.2	1.5	-	106	-	-3.00/51	0.3
008	TF	TT306	-	230 (222.5)	-7.2	6.5	-	-	-	-	1.0
009	TF	TT307	-	147 (139.9)	-7.2	4.9	-	-	-	-	1.0
010	TF	UTIBO	-	177 (169.9)	-7.2	27.6	-	4500	-	-	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KAIHO	351857.83N / 1394642.43E	TTRF1	353106.44N / 1395349.88E
TT301	352828.24N / 1395606.98E	TTRF2	353212.62N / 1395225.48E
TT302	352909.99N / 1395647.99E		
TT303	353413.28N / 1395350.00E		
TT304	353412.77N / 1395224.45E		
TT305	353332.98N / 1395034.74E		
RW23	353226.15N / 1394919.61E		
TT306	352740.05N / 1394357.98E		
TT307	352356.01N / 1394749.03E		
UTIBO	345647.02N / 1395343.90E		

CHANGE : PROC renamed.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


ILS or LOC RWY16R

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 111.55 ITA ILS-GP 332.75 ILS-DME CH-52Y	TOKYO TOWER 118.1 - 124.35 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

Simultaneous approach authorized with RWY 16L(ILS)

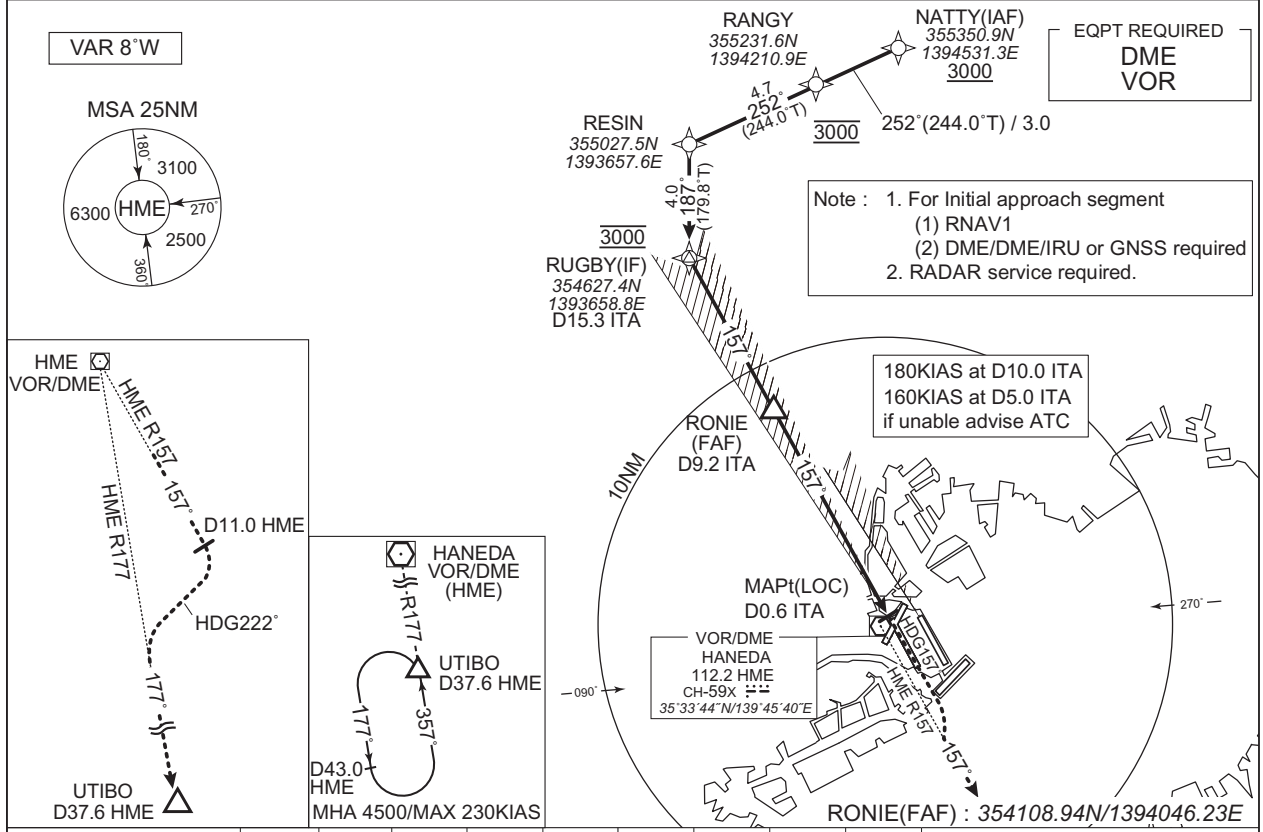

NM to Next ITA	FAF	9	8	7	6	5	4	3	MAPt
ALT (3.0° APCH Path)	2924	2873	2554	2236	1918	1599	1281	962	-

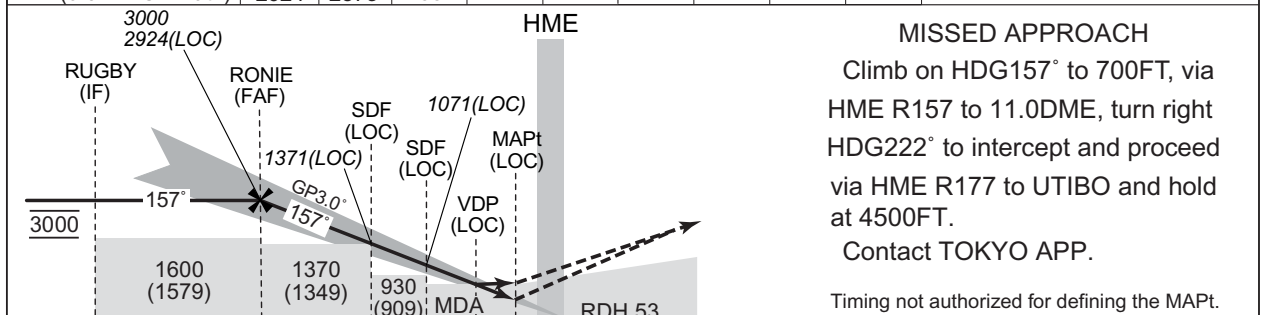

15.3	9.2	4.3	3.3	1.9	0.6	0.2	DME to ITA
15.1	9.0	4.1	3.2	1.7	0.5	0	NM to THR

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 16		AD elev. 21		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	216 (200)	550	570 (549)	1000	730 (709)	1600
B				1200		2400
C				1600		3200
D						

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling is not authorized during the night time, except clockwise circling to RWY16L/22/23/34R/34L.

CHANGE : OCA/H BTN RUGBY and RONIE.

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

RNP RWY16R

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	RNP APCH	TOKYO TOWER 118.1 - 124.35 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	----------	--	--------------------------


Simultaneous approach authorized with RWY 16L(RNP)

Baro-VNAV not authorized below -10°C

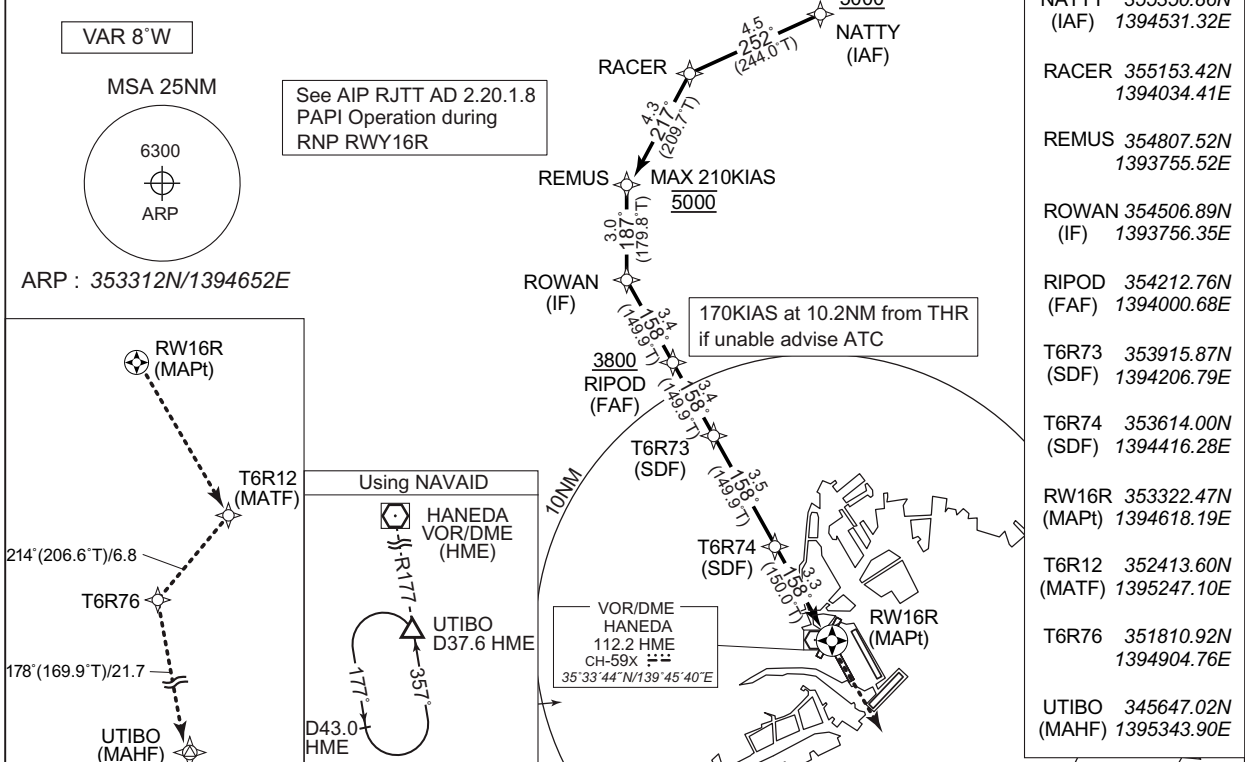

NATTY	355350.86N	(IAF)	1394531.32E
RACER	355153.42N		1394034.41E
REMUS	354807.52N		1393755.52E
ROWAN	354506.89N	(IF)	1393756.35E
RIPOD	354212.76N	(FAF)	1394000.68E
T6R73	353915.87N	(SDF)	1394206.79E
T6R74	353614.00N	(SDF)	1394416.28E
RW16R	353322.47N	(MAPt)	1394618.19E
T6R12	352413.60N	(MATF)	1395247.10E
T6R76	351810.92N		1394904.76E
UTIBO	345647.02N	(MAHF)	1395343.90E

NM to Next FIX	FAF	10	9	8	7	6	5	4	3	2	MAPt
ALT (3.45° APCH Path)	3800	3734	3367	3001	2635	2268	1902	1536	1169	803	-

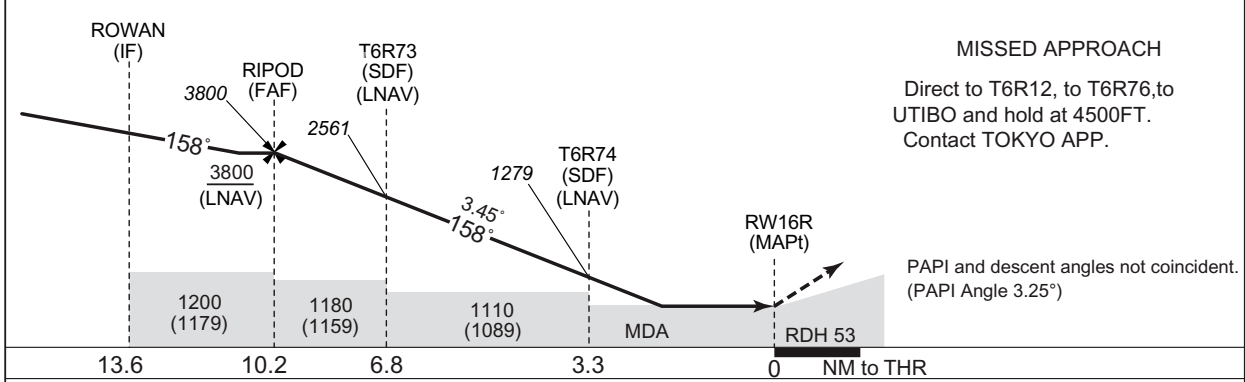

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 16		AD elev. 21		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	630 (614)	1000	630 (609)	1000	730 (709)	1600
B		1200		1200		2400
C		1600		1600		3200
D						

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling is not authorized during the night time, except clockwise circling to RWY16L/22/23/34R/34L.

CHANGE : OCA/H BTN T6R73 and T6R74. Missed APCH PROC.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


ILS or LOC RWY16L

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 111.95 IOC ILS-GP 330.95 ILS-DME CH-56Y	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

Simultaneous approach authorized with RWY 16R(ILS)

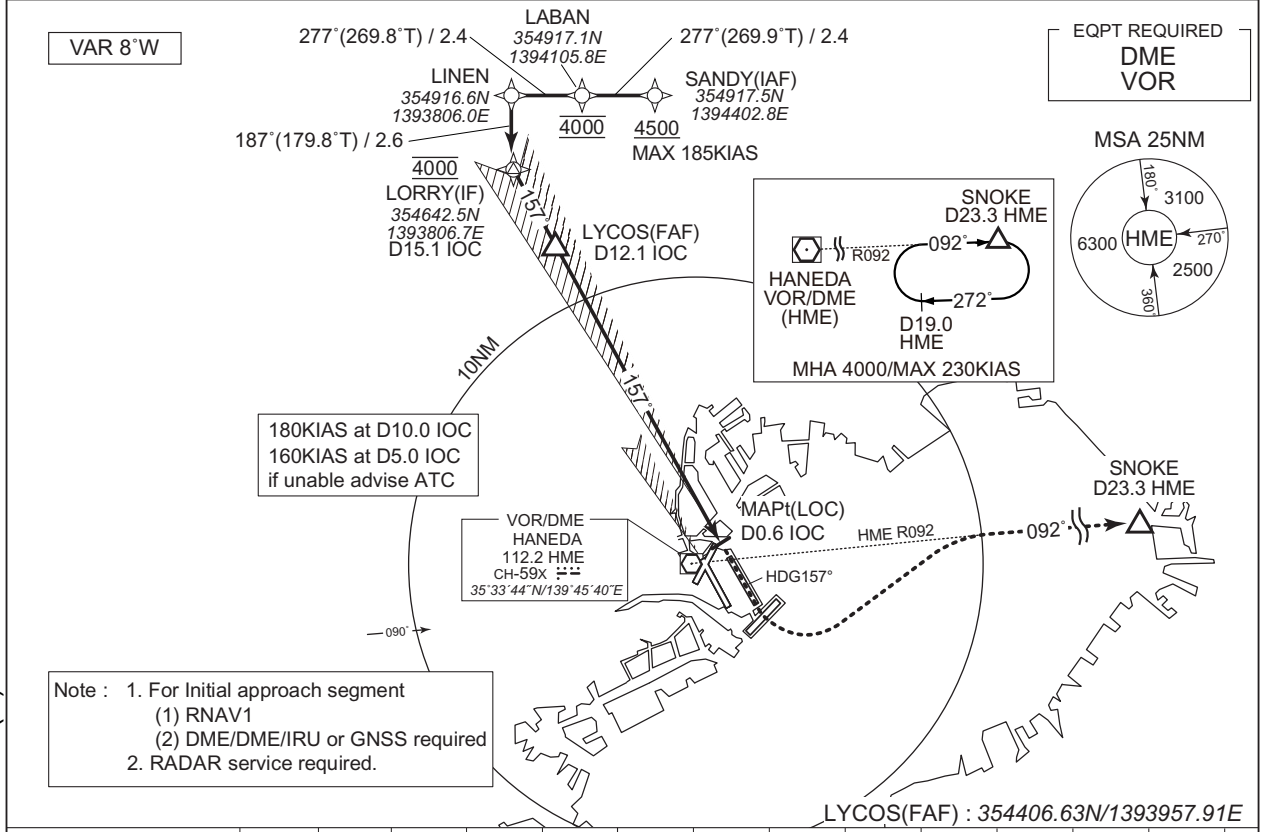

NM to IOC	FAF	12	11	10	9	8	7	6	5	4	3	2	MAPt
ALT (3.0° APCH Path)	3869	3833	3515	3197	2878	2560	2241	1923	1604	1286	967	649	-

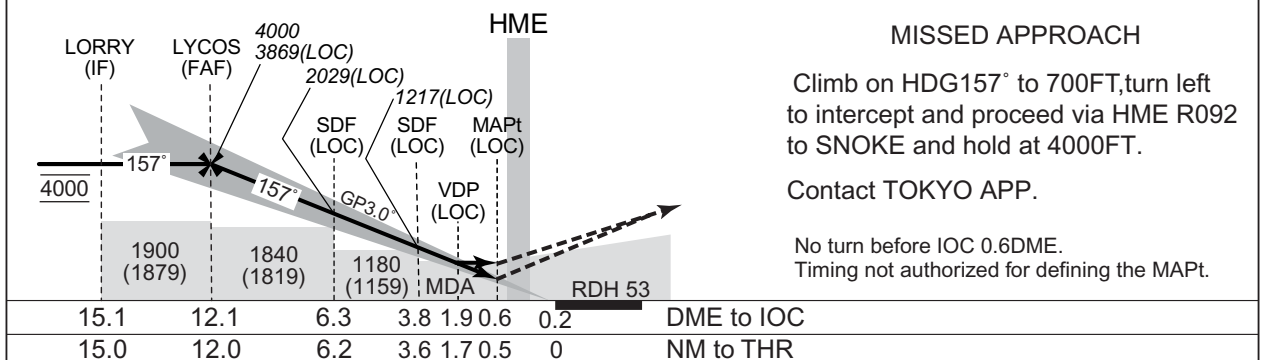

15.1	12.1	6.3	3.8	1.9	0.6	0.2	DME to IOC
15.0	12.0	6.2	3.6	1.7	0.5	0	NM to THR

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 19		AD elev. 21		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	219 (200)	550	590 (569)	1000	730 (709)	1600
B				1200		
C				1600		
D				1600		

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling is not authorized during the night time, except counterclockwise circling to RWY16R, clockwise circling to 22/23/34R/34L.

CHANGE : PROC ALT at SDF. OCA/H. DME to IOC. NM to THR. MDA(H) of LOC.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


RNP RWY16L

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	RNP APCH	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	----------	--	--------------------------


Simultaneous approach authorized with RWY16R(RNP)

Baro-VNAV not authorized below -10°C

SANDY (IAF)	354917.53N 1394402.84E
LYCEE (IF)	354454.12N 1394057.40E
LAUDA (FAF)	354144.81N 1394139.05E
T6L61 (SDF)	353858.19N 1394337.69E
T6L64 (SDF)	353653.43N 1394506.41E
RW16L (MAPt)	353346.27N 1394719.34E
SNOKE (MAHF)	353551.64N 1401411.69E

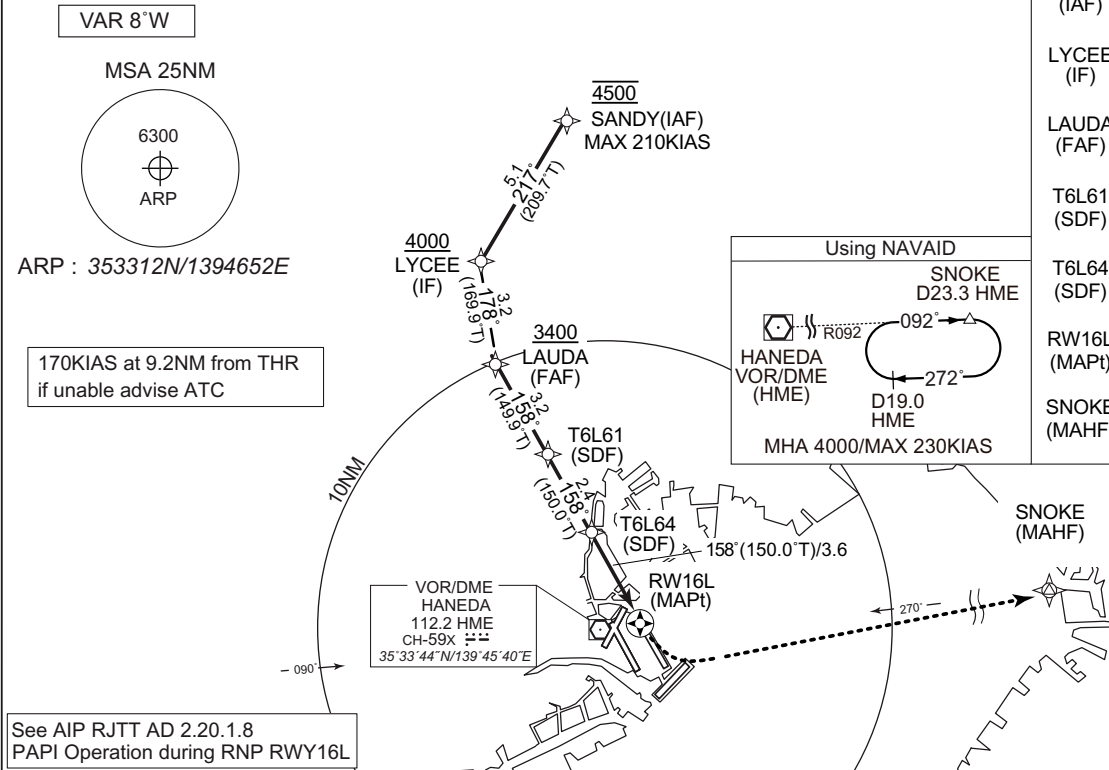

NM to Next FIX	FAF	9	8	7	6	5	4	3	2	MAPt
ALT (3.45° APCH Path)	3446	3370	3004	2637	2271	1905	1539	1172	806	-

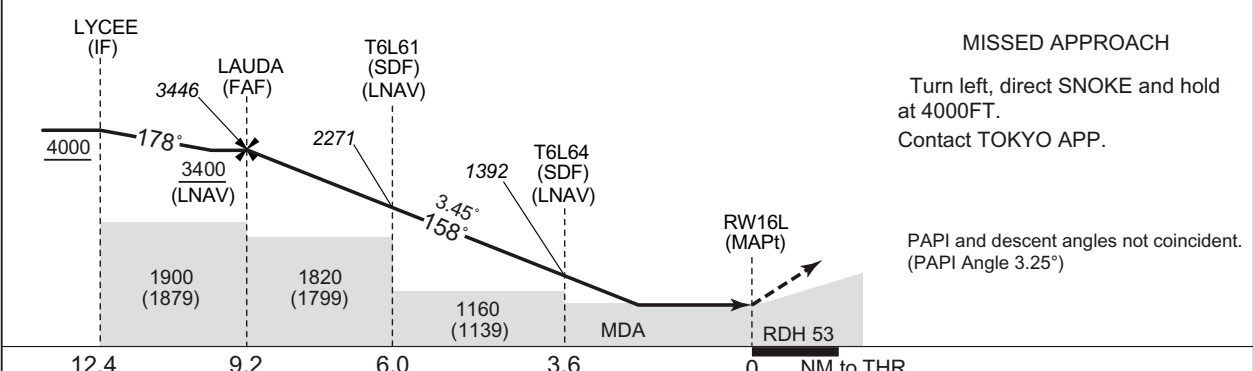

Missed APCH climb gradient MNM 5.0%

CAT	LNAV/VNAV		LNAV		CIRCLING		
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS	
A	640 (621)	1000	640 (619)	1000	730 (709)	1600	
B		1200		1200		2400	
C		1600		1600		1600	3200
D							

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling is not authorized during the night time, except counterclockwise circling to RWY16R, clockwise circling to RWY22/23/34R/34L.

CHANGE : T6L62 abolished. T6L64 established. Missed APCH course. OCA/H.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL



VOR A (for RWY16R/RWY16L)

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	HANEDA VOR/DME 112.2 HME CH-59X 35°33'44"N/139°45'40"E	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	---	--	--------------------------

VAR 7°W (2011)

EQPT REQUIRED  
DME

**CAUTION**  
BE ALERT TO RUNWAY MISUNDERSTANDING.  
See LDG CHART  
APPROACH GUIDANCE LIGHTS FOR RUNWAY 16R/16L

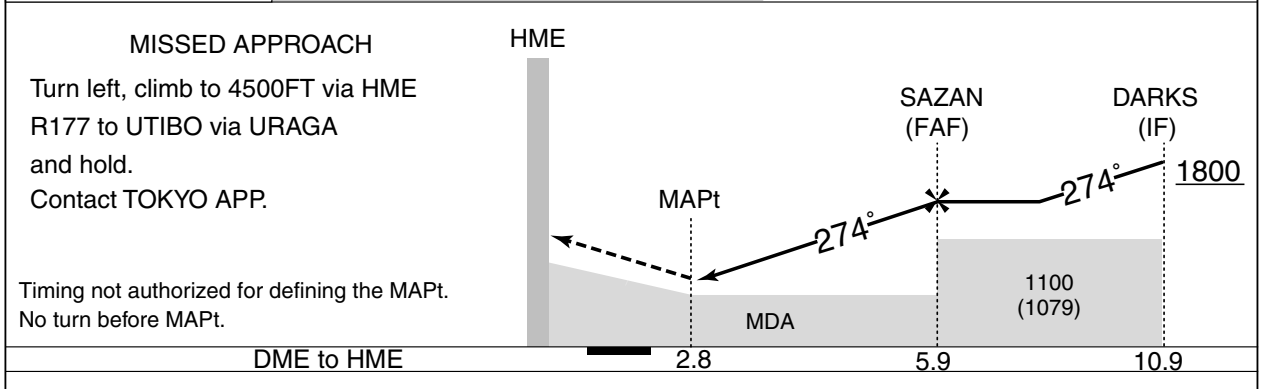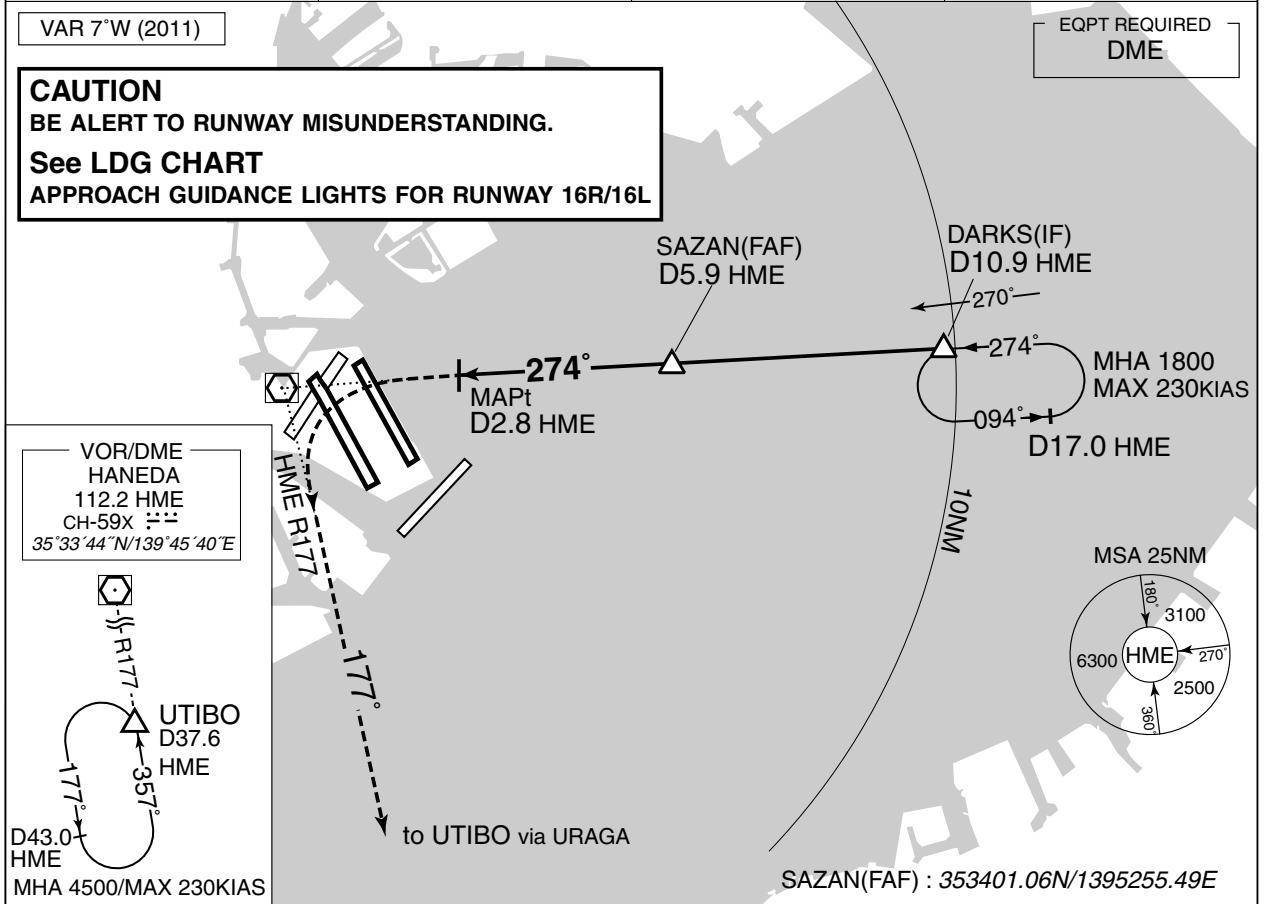

MINIMA		AD elev. 21	
CAT	CIRCLING		VIS
	MDA(H)		
A	760 (739)		1600
B			
C			2400
D			3200


**INTENTIONALLY LEFT BLANK**

**VISUAL APPROACH  
HIGHWAY VISUAL RWY34R**

RJTT / TOKYO INTL

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS – LOC ITC 108.9 ILS–GP 329.3	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	ATIS 128.8
---	--	--	------------

Simultaneous approach authorized with RWY34L

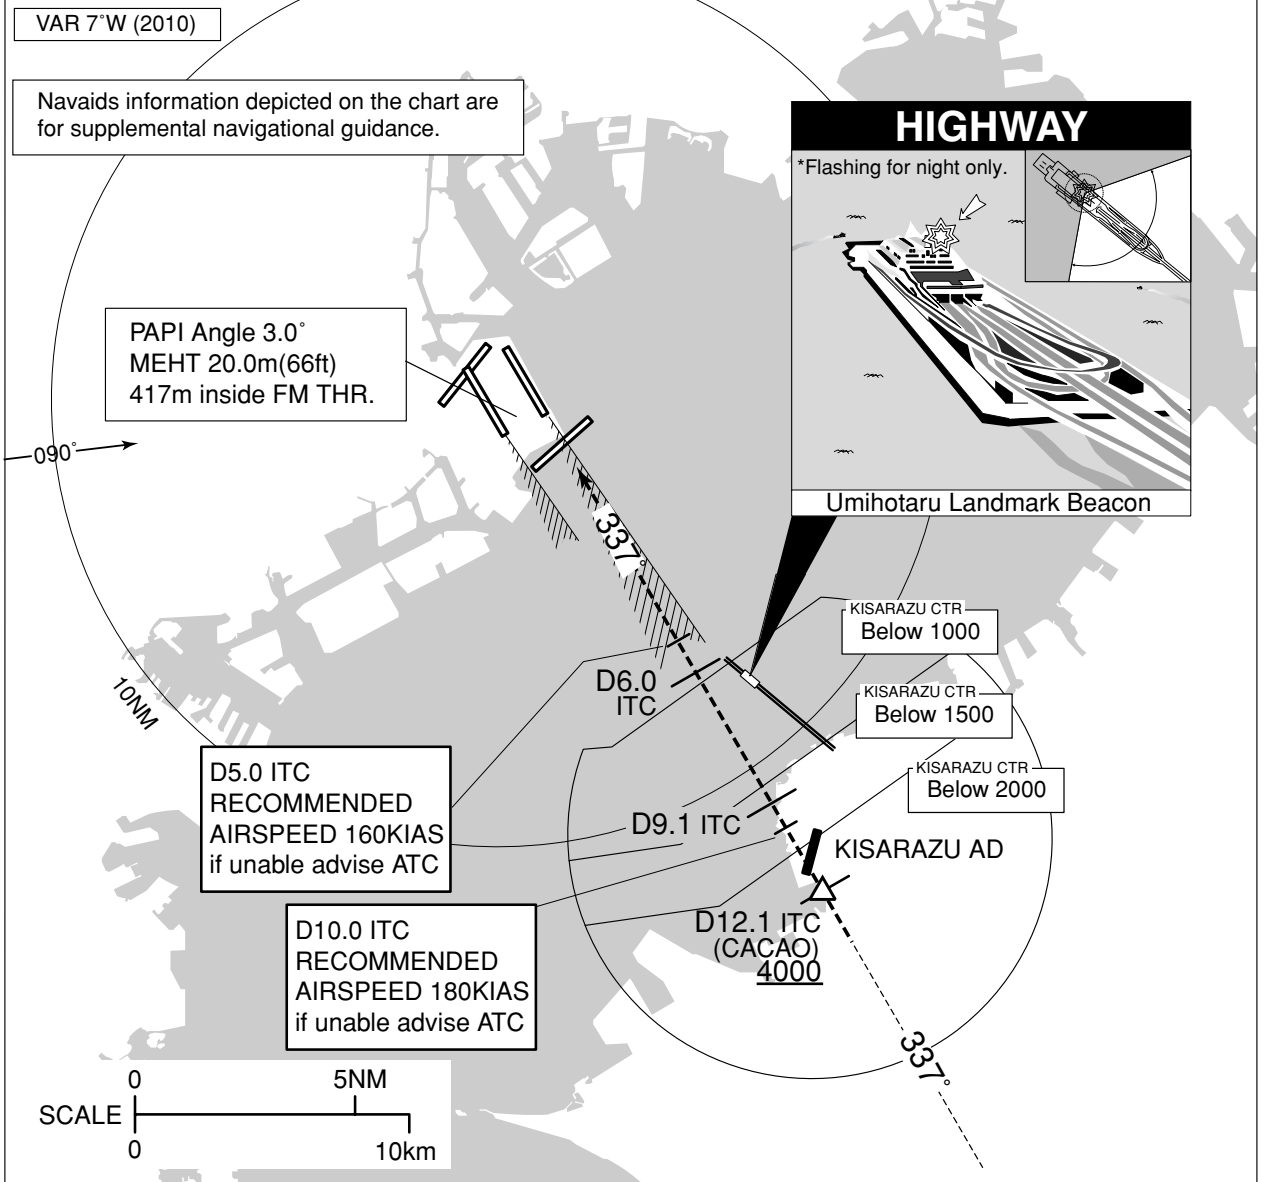

When visual approaches to RWY34R are in progress, arriving aircraft may be vectored to CACAO for HIGHWAY VISUAL RWY34R APPROACH.  
In the event of a go-around, climb via ITC LOC and after THR HDG030° to 3000FT until receiving ATC instructions.

<HIGHWAY VISUAL RWY34R APPROACH>

After CACAO, aircraft proceed to RWY34R (ITC LOC course).

For avoid entering KISARAZU CTR, aircraft is recommended ITC 9.1DME at or above 2500FT, ITC 6.0DME at or above 1500FT.

Note1: Pilot is urged to report promptly to ATC when lose sight of landmark(HIGHWAY) and the preceding aircraft concerned.

Note2: Reference NAVAIDS(ITC LOC) must be operating.

Note3: RADAR service required.


Note4: Procedure not authorized at night in case of Umihotaru Landmark Beacon not operated.

Note5: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.



RJTT / TOKYO INTL

HLDG PATTERN

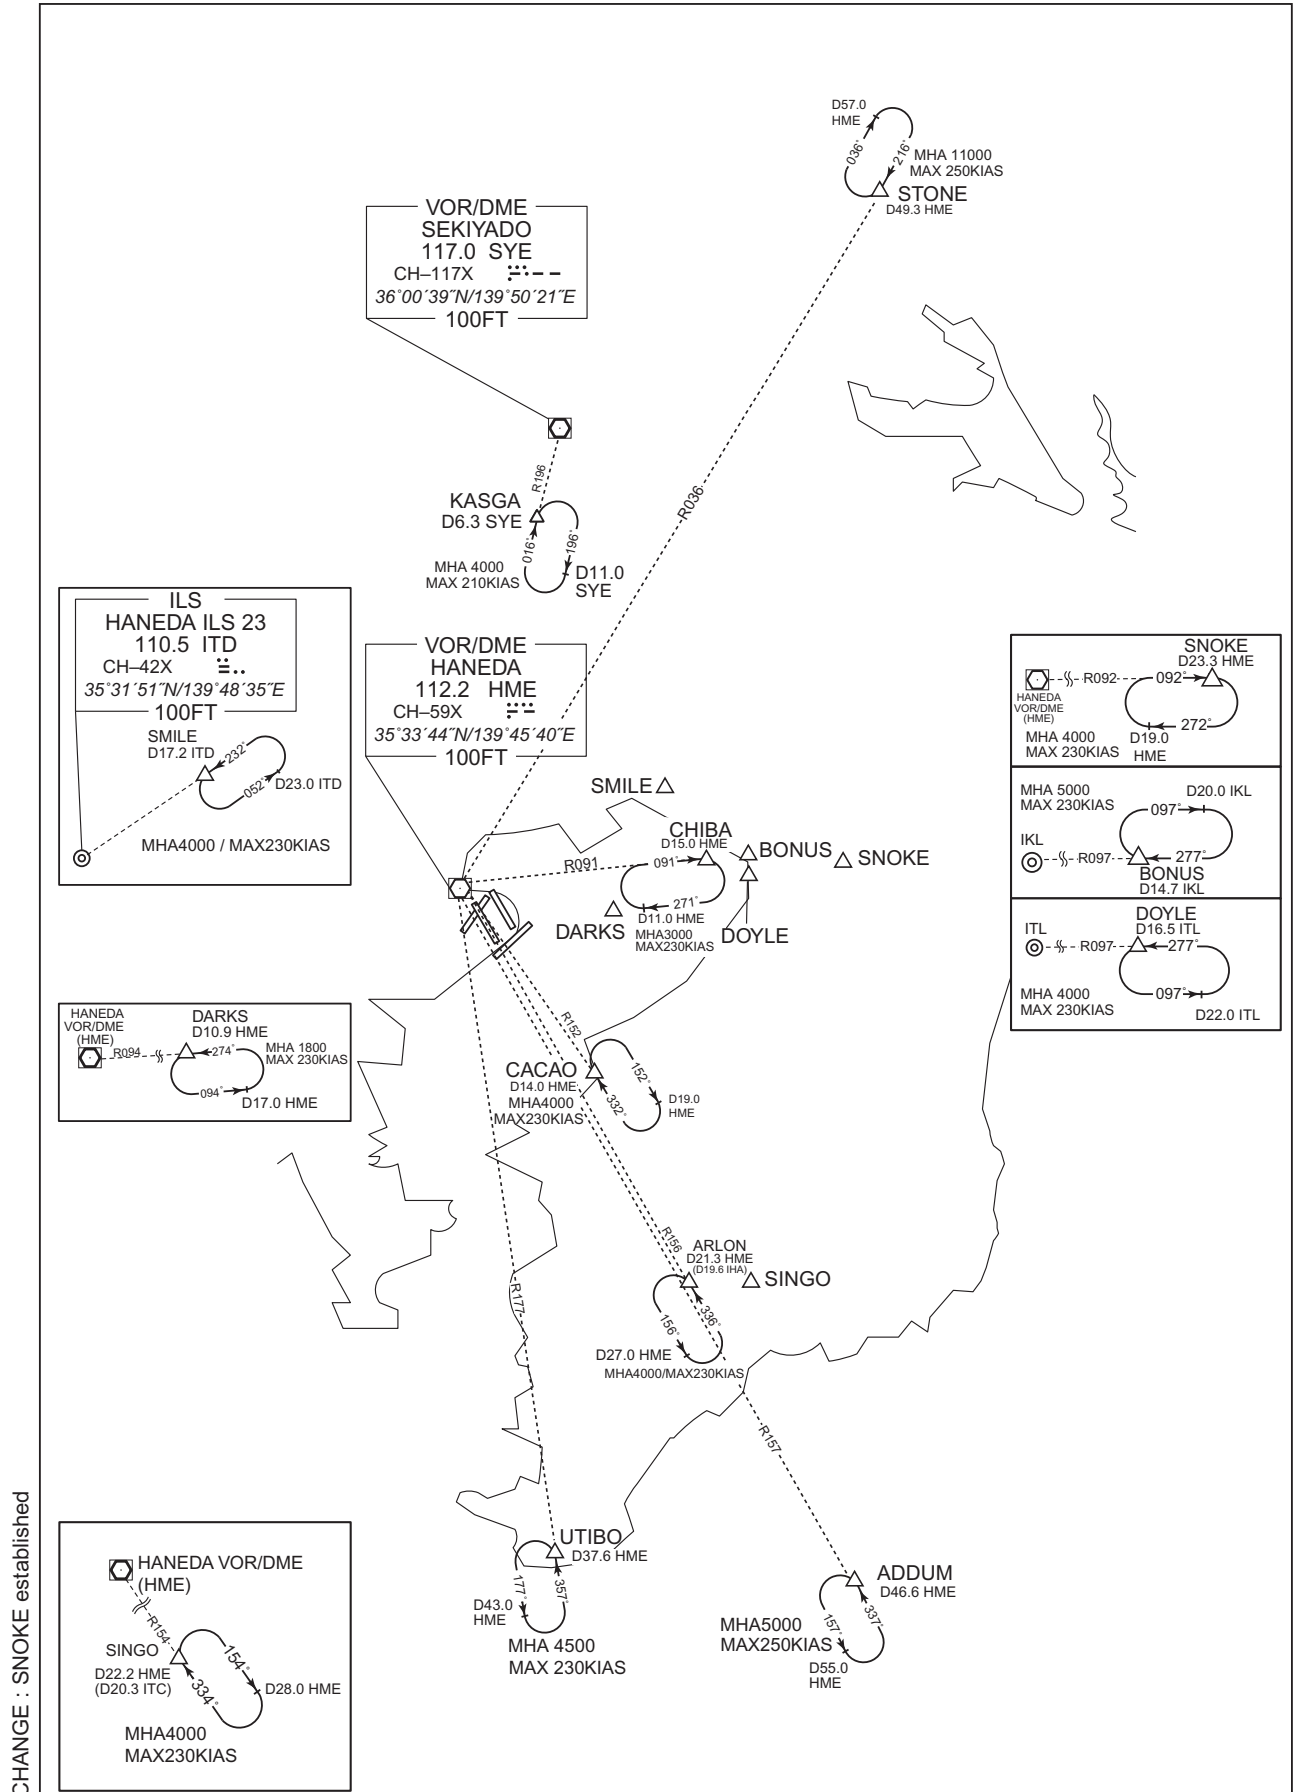











RJTT / TOKYO INTL


RNAV HLDG PATTERN

Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

RNAV 1

1.Outbound Time / Distance  
2.Speed  
→See Tabular Description.

 <p>ARLON MHA 4000</p>	 <p>BACON MHA 4000</p>
 <p>COACH MHA 4000</p>	 <p>CREAM MHA 4000</p>
 <p>DREAD MHA 5000</p>	 <p>MESSE MHA 6000</p>
 <p>SCREW MHA 4000</p>	 <p>STING MHA 4000</p>
 <p>NUMAN MHA 4000</p>	
 <p>NEURO MHA 4000</p>	

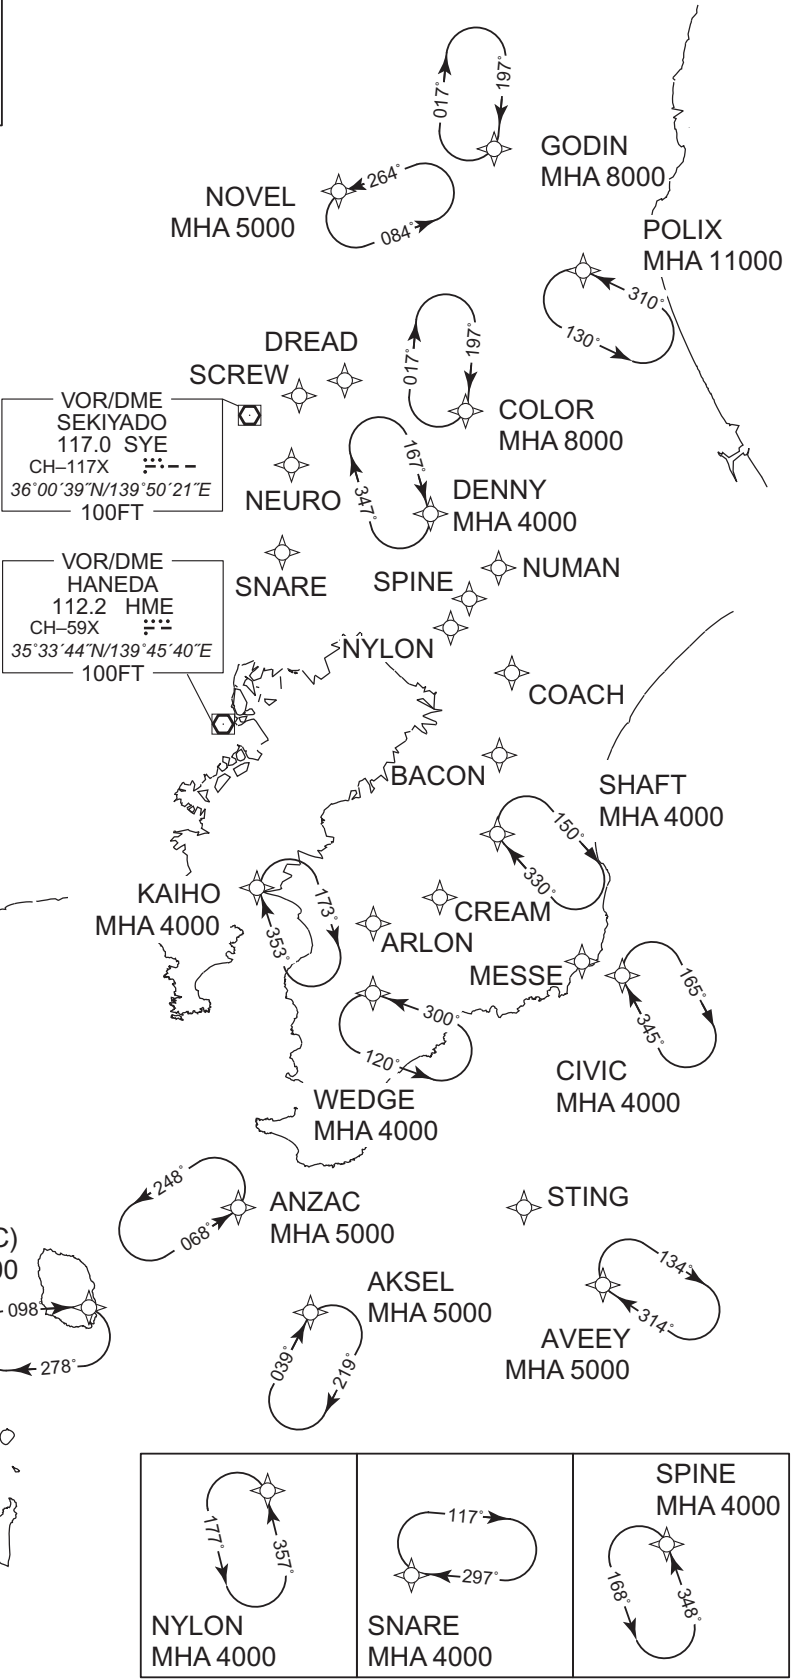

CHANGE : ACORN abolished. ANZAC established.

RJTT / TOKYO INTL

RNAV HLDG PATTERN

Path	Waypoint Identifier	Inbound Course 'M(T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	DENNY	167 (159.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	DREAD	191 (183.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	MESSE	246 (238.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	6000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	290 (282.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SCREW	203 (195.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : ACORN abolished. ANZAC established.

RJTT / TOKYO INTL

RNAV HLDG PATTERN


Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	MESSE	351100.8N / 1402214.7E
ANZAC	345028.8N / 1394146.7E	NEURO	355727.6N / 1395441.3E
ARLON	351525.3N / 1395859.8E	NOVEL	362106.9N / 1400004.9E
AVEEY	344155.9N / 1402158.0E	NUMAN	354714.4N / 1401204.9E
BACON	353155.0N / 1401215.1E	NYLON	354018.5N / 1400919.9E
CIVIC	350840.6N / 1402552.1E	POLIX	361237.1N / 1402622.5E
COACH	353736.0N / 1401231.5E	SCREW	360301.2N / 1395400.4E
COLOR	360116.3N / 1401219.8E	SHAFT	352227.4N / 1401313.3E
CREAM	351743.4N / 1400612.4E	SNARE	354731.1N / 1395238.1E
DENNY	354828.8N / 1400556.4E	SPINE	354213.5N / 1401125.8E
DREAD	360359.2N / 1395856.9E	STING	345157.9N / 1401453.4E
GODIN	362425.3N / 1401655.9E	WEDGE	350900.4N / 1395846.5E
KAIHO	351857.8N / 1394642.4E	XAC	344244.1N / 1392450.5E

CHANGE : ACORN abolished. ANZAC established.

RJTT / TOKYO INTL

Visual REP

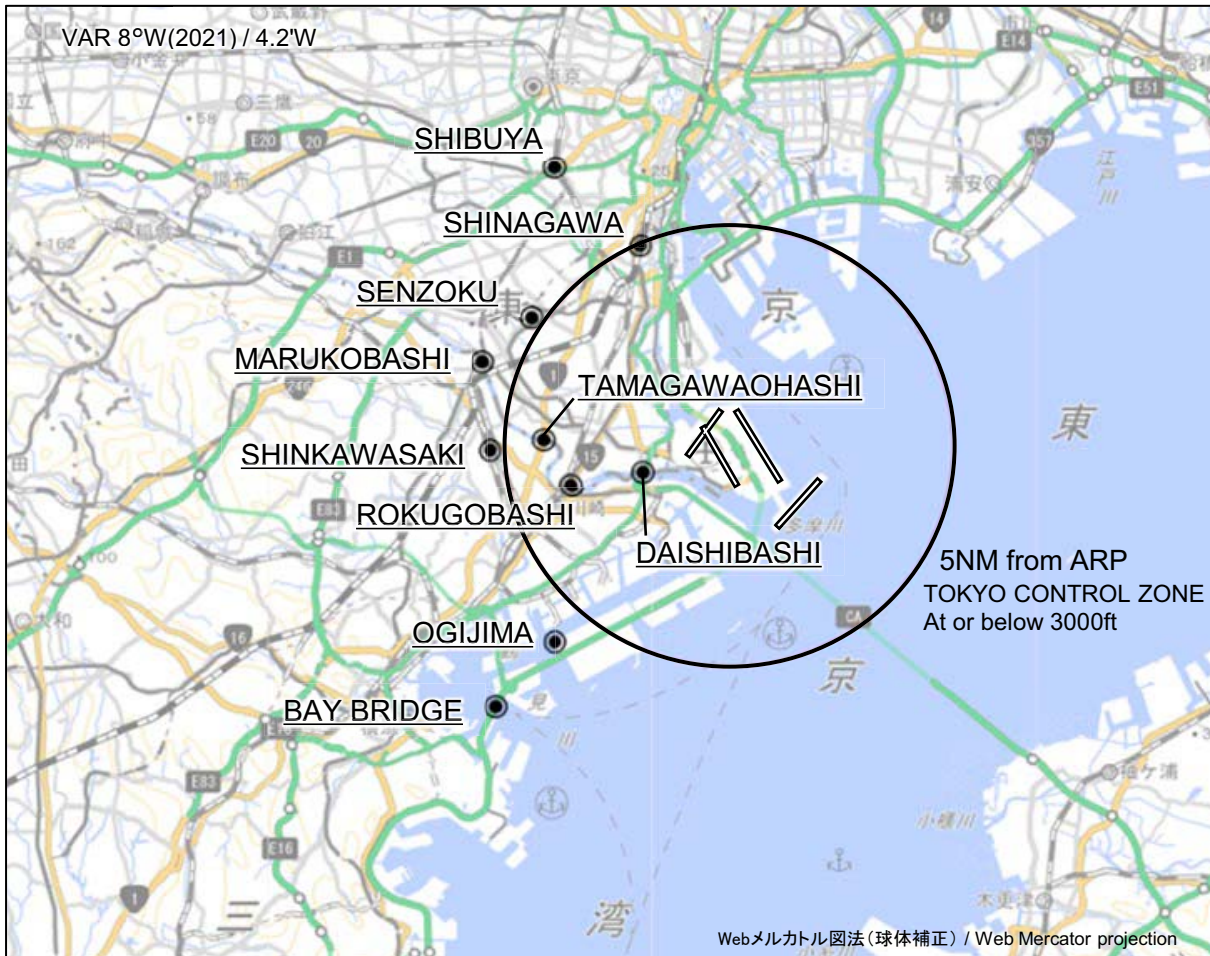


※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
渋谷 Shibuya	328°T / 7.4NM	JR駅 JR Station
品川 Shinagawa	336°T / 5.0NM	JR駅 JR Station
洗足 Senzoku	303°T / 5.3NM	池 Pond
丸子橋 Marukobashi	289°T / 5.8NM	橋 Bridge
多摩川大橋 Tamagawaohashi	272°T / 4.2NM	橋 Bridge
新川崎 Shinkawasaki	269°T / 5.4NM	JR駅 JR Station
大師橋 Daishibashi	253°T / 2.0NM	橋 Bridge
六郷橋 Rokugobashi	255°T / 3.7NM	橋 Bridge
扇島 Ogijima	221°T / 5.9NM	扇島の西端 West edge of the island
ベイブリッジ Bay Bridge	221°T / 7.9NM	(首都高速湾岸線)橋 Bridge

CHANGE : VAR.

RJTT / TOKYO INTL

Minimum Vectoring Altitude CHART

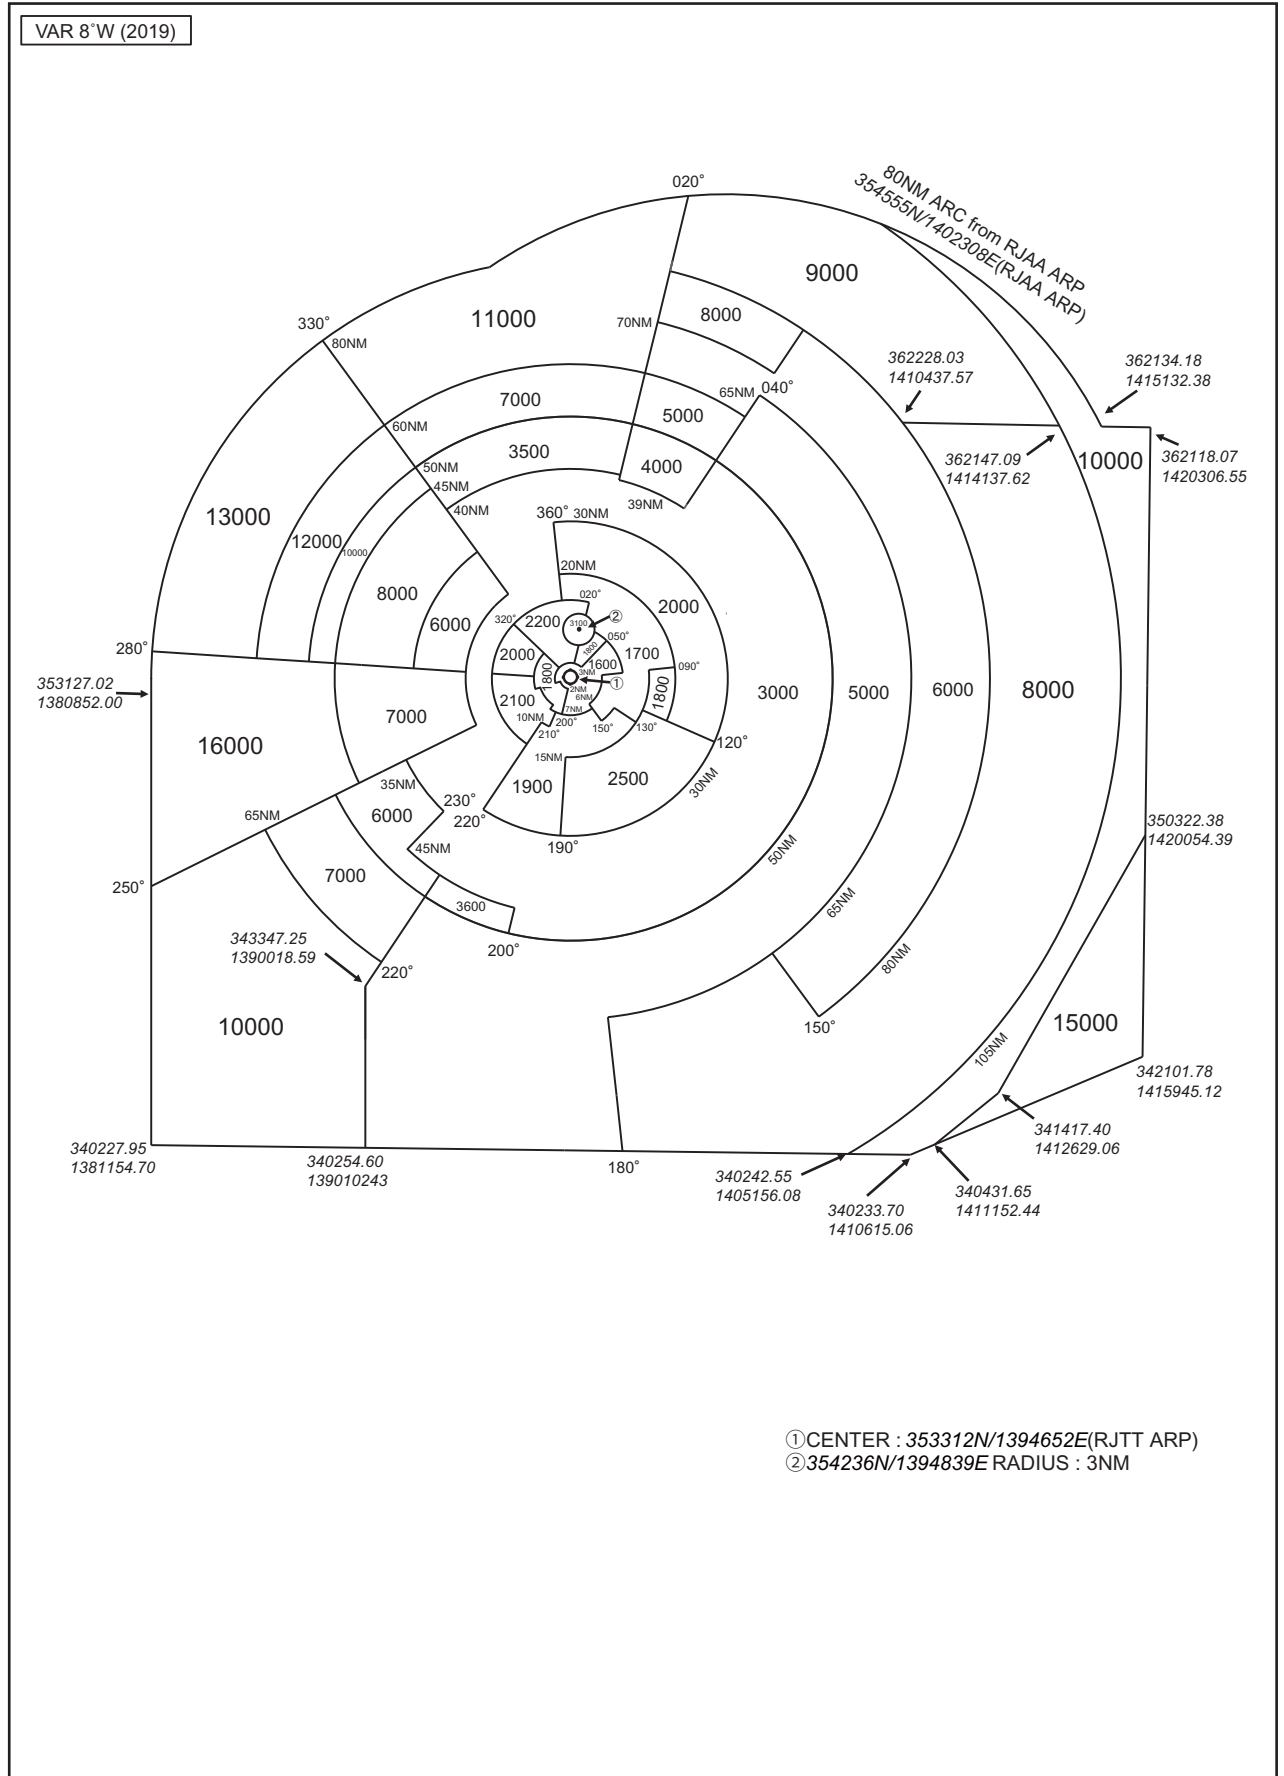



CHANGE : PAPI RWY16L-3.25°, PAPI RWY16R-3.25° installed.

- |   |   |
|---|---|
| <p>PAPI:</p> <ul style="list-style-type: none"> <li>RWY16L-3.0°, MEHT 19.9m (65ft)<br/>412m inside from THR.</li> <li>RWY16L-3.25°, MEHT 19.9m(65ft)<br/>378m inside from THR.</li> <li>RWY34R-3.0°, MEHT 20.0m (66ft)<br/>416m inside from THR.</li> <li>RWY16R-3.0°, MEHT 19.9m (65ft)<br/>432m inside from THR.</li> <li>RWY16R-3.25°, MEHT 19.9m(65ft)<br/>397m inside from THR.</li> <li>RWY34L-3.0°, MEHT 20.0m (66ft)<br/>449m inside from THR.</li> </ul> | <ul style="list-style-type: none"> <li>RWY04-3.0°, MEHT 18.5m (61ft)<br/>369m inside from THR.</li> <li>RWY22-3.0°, MEHT 19.5m (63ft)<br/>438m inside from THR.</li> <li>RWY23-3.0°, MEHT 20.0m (66ft)<br/>452m inside from THR.</li> <li>RWY Grooving :</li> <li>RWY16L/34R 3360m X 40m</li> <li>RWY16R/34L 3000m X 40m</li> <li>RWY04/22 2500m X 40m</li> <li>RWY05/23 2500m X 40m</li> </ul> |
|---|---|

Local flying restriction of Tokyo INTL AP  
Unless otherwise authorized by ATC.  
Aircraft other than the arriving at and/or departing from Tokyo International Airport are required not to fly over the Kawasaki Petrochemical Complex area, and even in case of flying over the area, not to fly below an altitude of 3,000 feet.

