

AD 2 AERODROMES

RORK AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RORK - KITADAITO

RORK AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

| | | |
|---|--|---|
| 1 | ARP coordinates and site at AD | 255641N/1311937E 025°/750m from RWY 03 THR |
| 2 | Direction and distance from (city) | |
| 3 | Elevation/ Reference temperature | 70.9ft / 32°C(2004-2008) |
| 4 | Geoid undulation at AD ELEV PSN | Nil |
| 5 | MAG VAR/ Annual change | 5°W(2014) / 2.1°W |
| 6 | AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses | OKINAWA PREF. PUBLIC AP. 19-16, Aza-Minami, Kitadaitou-son, Shimajiri-gun, Okinawa Pref. TEL: 09802-3-4016 FAX: 09802-3-4217 |
| 7 | Types of traffic permitted(IFR/ VFR) | IFR/VFR |
| 8 | Remarks | Nil |

RORK AD 2.3 OPERATIONAL HOURS

| | | |
|----|---------------------------|--|
| 1 | AD Administration | 2300 - 0900 |
| 2 | Customs and immigration | On request Customs: 098-862-8529 Immigration: 098-832-4185 |
| 3 | Health and sanitation | Nil |
| 4 | AIS Briefing Office | Nil |
| 5 | ATS Reporting Office(ARO) | Nil |
| 6 | MET Briefing Office | H24 (NAHA) |
| 7 | ATS | ATS: 2300 - 0900 Remarks: AFIS provided by Naha Airport Office. |
| 8 | Fuelling | Nil |
| 9 | Handling | Ask AD Administration |
| 10 | Security | Ask AD Administration |
| 11 | De-icing | Nil |
| 12 | Remarks | Nil |

RORK AD 2.4 HANDLING SERVICES AND FACILITIES

| | | |
|---|---|-----|
| 1 | Cargo-handling facilities | Nil |
| 2 | Fuel/ oil types | Nil |
| 3 | Fuelling facilities/ capacity | Nil |
| 4 | De-icing facilities | Nil |
| 5 | Hangar space for visiting aircraft | Nil |
| 6 | Repair facilities for visiting aircraft | Nil |
| 7 | Remarks | Nil |

RORK AD 2.5 PASSENGER FACILITIES

| | | |
|---|----------------------|---------------------------|
| 1 | Hotels | Nil |
| 2 | Restaurants | Nil |
| 3 | Transportation | Nil |
| 4 | Medical facilities | Clinic 3.8km from airport |
| 5 | Bank and Post Office | Nil |
| 6 | Tourist Office | Nil |
| 7 | Remarks | Nil |

RORK AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

| | | |
|---|---|----------------------------------|
| 1 | AD category for fire fighting | CAT 6 |
| 2 | Rescue equipment | Chemical fire fighting truck x 2 |
| 3 | Capability for removal of disabled aircraft | Incapable |
| 4 | Remarks | Nil |

RORK AD 2.7 SEASONAL AVAILABILITY-CLEARING

| | | |
|---|-----------------------------|----------------|
| 1 | Types of clearing equipment | Not Applicable |
| 2 | Clearance priorities | Not Applicable |
| 3 | Remarks | Nil |

RORK AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

| | | |
|---|-------------------------------------|--|
| 1 | Apron surface and strength | Surface : Asphalt-concrete Strength : PCN 19/F/B/Y/T |
| 2 | Taxiway width, surface and strength | Width : 18M Surface : Asphalt-concrete Strength : PCN 19/F/B/Y/T |
| 3 | ACL and elevation | Not Available |
| 4 | VOR checkpoints | Not Available |
| 5 | INS checkpoints | Not Available |
| 6 | Remarks | Nil |

RORK AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

| | | |
|---|--|---|
| 1 | Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands | Nil |
| 2 | RWY and TWY markings and LGT | RWY:(RWY03/21) (Marking) RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe (LGT) REDL, RTHL, RENL TWY: (Marking) TWY CL, TWY side stripe (LGT) TWY edge LGT |
| 3 | Stop bars | Nil |
| 4 | Remarks | (Marking) Overrun area |

RORK AD 2.10 AERODROME OBSTACLES

- In Area2 Nil
- In Area3 To be developed

RORK AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

| | | |
|----|---|---|
| 1 | Associated MET Office | NAHA |
| 2 | Hours of service MET Office outside hours | H24(NAHA) |
| 3 | Office responsible for TAF preparation Periods of validity | Nil |
| 4 | Trend forecast Interval of issuance | Nil |
| 5 | Briefing/ consultation provided | Briefing is available upon inquiry at NAHA. |
| 6 | Flight documentation Language(s) used | C En |
| 7 | Charts and other information available for briefing or consultation | S ₆ , U ₈₅ , U ₇ , U ₅ , U ₃ , U ₂₅ , U ₂ /T _r , P _S , P ₅ , P ₃ , P ₂₅ , P _{SWE} , P _{SWF} , P _{SWG} , P _{SWI} , P _{SWM} , P _{SW} (domestic), E, C, W _E , W _F , W _G , W _I , W, N |
| 8 | Supplementary equipment available for providing information | Nil |
| 9 | ATS units provided with information | RADIO |
| 10 | Additional information(limitation of service, etc.) | Nil |

RORK AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

| Designations RWY NR | TRUE BRG | Dimensions of RWY(M) | Strength(PCN) and surface of RWY | THR coordinates THR geoid undulation | THR elevation and highest elevation of TDZ of precision APP RWY |
|------------------------|------------------------|---------------------------------|-------------------------------------|--|---|
| 1 | 2 | 3 | 4 | 5 | 6 |
| 03 | To be issued | 1500x45 | PCN | 255618.86N | THR ELEV : 74FT |
| 21 | later | 1500x45 | 19/F/B/Y/T Asphalt Concrete | 1311924.69E 255702.85N 1311947.89E | THR ELEV : 80FT |
| Slope of RWY | Strip Dimensions(M) | RESA (Overrun) Dimensions(M) | Remarks | | |
| 7 | 10 | 11 | 14 | | |
| See AD2.24. AD chart | 1620x150 | 41 x 152 | RWY grooving:1500mX30m | | |
| | 1620x150 | 41 x 151 | | | |

RORK AD 2.13 DECLARED DISTANCES

| RWY Designator | TORA (m) | TODA (m) | ASDA (m) | LDA (m) | Remarks |
|----------------|-------------|-------------|-------------|------------|---------|
| 1 | 2 | 3 | 4 | 5 | 6 |
| 03 | 1500 | 1500 | 1500 | 1500 | Nil |
| 21 | 1500 | 1500 | 1500 | 1500 | Nil |

RORK AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY Designator | APCH LGT type LEN INTST | RTHL Color WBAR | PAPI (VASIS) Angle DIST FM THR MEHT | RTZL LEN | RCLL LEN Spacing Color INTST | REDL LEN Spacing Color INTST | RENL Color WBAR | STWL LEN Color |
|--|-------------------------|-----------------|-------------------------------------|----------|------------------------------|--|-----------------|----------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 03 | Nil | Green | PAPI 3.0°/LEFT 288.8m 45ft | Nil | Nil | 1500m 60m Coded color (White/Yellow) LIH | Red | Nil |
| 21 | Nil | Green | PAPI 3.0°/LEFT 302.5m 45ft | Nil | Nil | 1500m 60m Coded color (White/Yellow) LIH | Red | Nil |
| Remarks | | | | | | | | |
| 10 | | | | | | | | |
| RWY THR ID LGT for RWY 03/21 THR (Color:White) | | | | | | | | |

RORK AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

| | | |
|---|--|---|
| 1 | ABN/IBN location, characteristics and hours of operation | ABN: 255643N/1311928E , White/Green EV4.3sec, HO |
| 2 | LDI location and LGT Anemometer location and LGT | LDI:Nil Anemometer: 580m to MID FM RWY03 THR, LGTD |
| 3 | TWY edge and centerline lighting | TWY edge LGT installed, see AD2.9 |
| 4 | Secondary power supply/ switch-over time | ALL LGT/Within 15sec |
| 5 | Remarks | WDI LGT |

RORK AD 2.16 HELICOPTER LANDING AREA

| |
|-----|
| Nil |
|-----|

RORK AD 2.17 ATS AIRSPACE

| Designation and lateral limits | | Vertical limits (ft) | Airspace classification | ATS unit call sign Language | Remarks |
|--------------------------------|---|----------------------|-------------------------|-----------------------------|---------|
| 1 | | 2 | 3 | 4 | 6 |
| Kitadaito Information Zone | Area within a radius of 5nm(9km) of ARP excluding the south side of the line between the intersections of swinging arcs 5nm(9km) in radius from Kitadaito ARP and Minamidaito ARP | 3,000 or below | E | Daito Radio En | Nil |

RORK AD 2.18 ATS COMMUNICATION FACILITIES

| Service designation | Call sign | Frequency | Hours of operation | Remarks |
|---------------------|-------------|-----------|--------------------|---------------------------------|
| 1 | 2 | 3 | 4 | 5 |
| AFIS | Daito Radio | 118.55MHz | 2300 - 0900 | Operated by Naha Airport Office |

RORK AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid | ID | Frequency | Hours of operation | Position of transmitting antenna coordinates | Elevation of DME transmitting antenna | Remarks |
|-------------|----|-----------|--------------------|--|---------------------------------------|---------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| Nil | | | | | | |

RORK AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

Nil

2. Taxiing to and from stands

Nil

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Nil

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

RORK AD 2.21 NOISE ABATEMENT PROCEDURES

Nil

RORK AD 2.22 FLIGHT PROCEDURES**TAKE OFF MINIMA**

| | RWY | ACFT CAT | REDL & RCLL | | REDL or RCLL or RCL Marking | | NIL (DAYTIME ONLY) | |
|---|-----|-------------|-----------------|----------|--------------------------------|-------------|-----------------------|-------------|
| | | | CEIL-RVR | CEIL-VIS | CEIL-RVR | CEIL-VIS | CEIL-RVR | CEIL-VIS |
| Multi-Engine ACFT with TKOF ALTN AP FILED | 03 | A,B,C | - | - | - | 0'- 400m | - | 0'- 500m |
| | 21 | A,B,C | - | - | - | 200'- 1600m | - | 200'- 1600m |
| OTHER | 03 | A,B,C | AVBL LDG MINIMA | | | | | |
| | 21 | A,B,C | | | | | | |

RORK AD 2.23 ADDITIONAL INFORMATION


| |
|-----|
| Nil |
|-----|

RORK AD 2.24 CHARTS RELATED TO AN AERODROME

| |
|---|
| Aerodrome/Heliport Chart Standard Departure Chart - Instrument (SOUTH) Standard Departure Chart - Instrument (CORCO NORTH-RNAV) Instrument Approach Chart (VOR Z RWY03) Instrument Approach Chart (VOR Y RWY03) Instrument Approach Chart (RNP RWY03) Other Chart (Visual REP) Other Chart (MVA Chart) |
|---|

RORK / KITADAITO

AD CHART

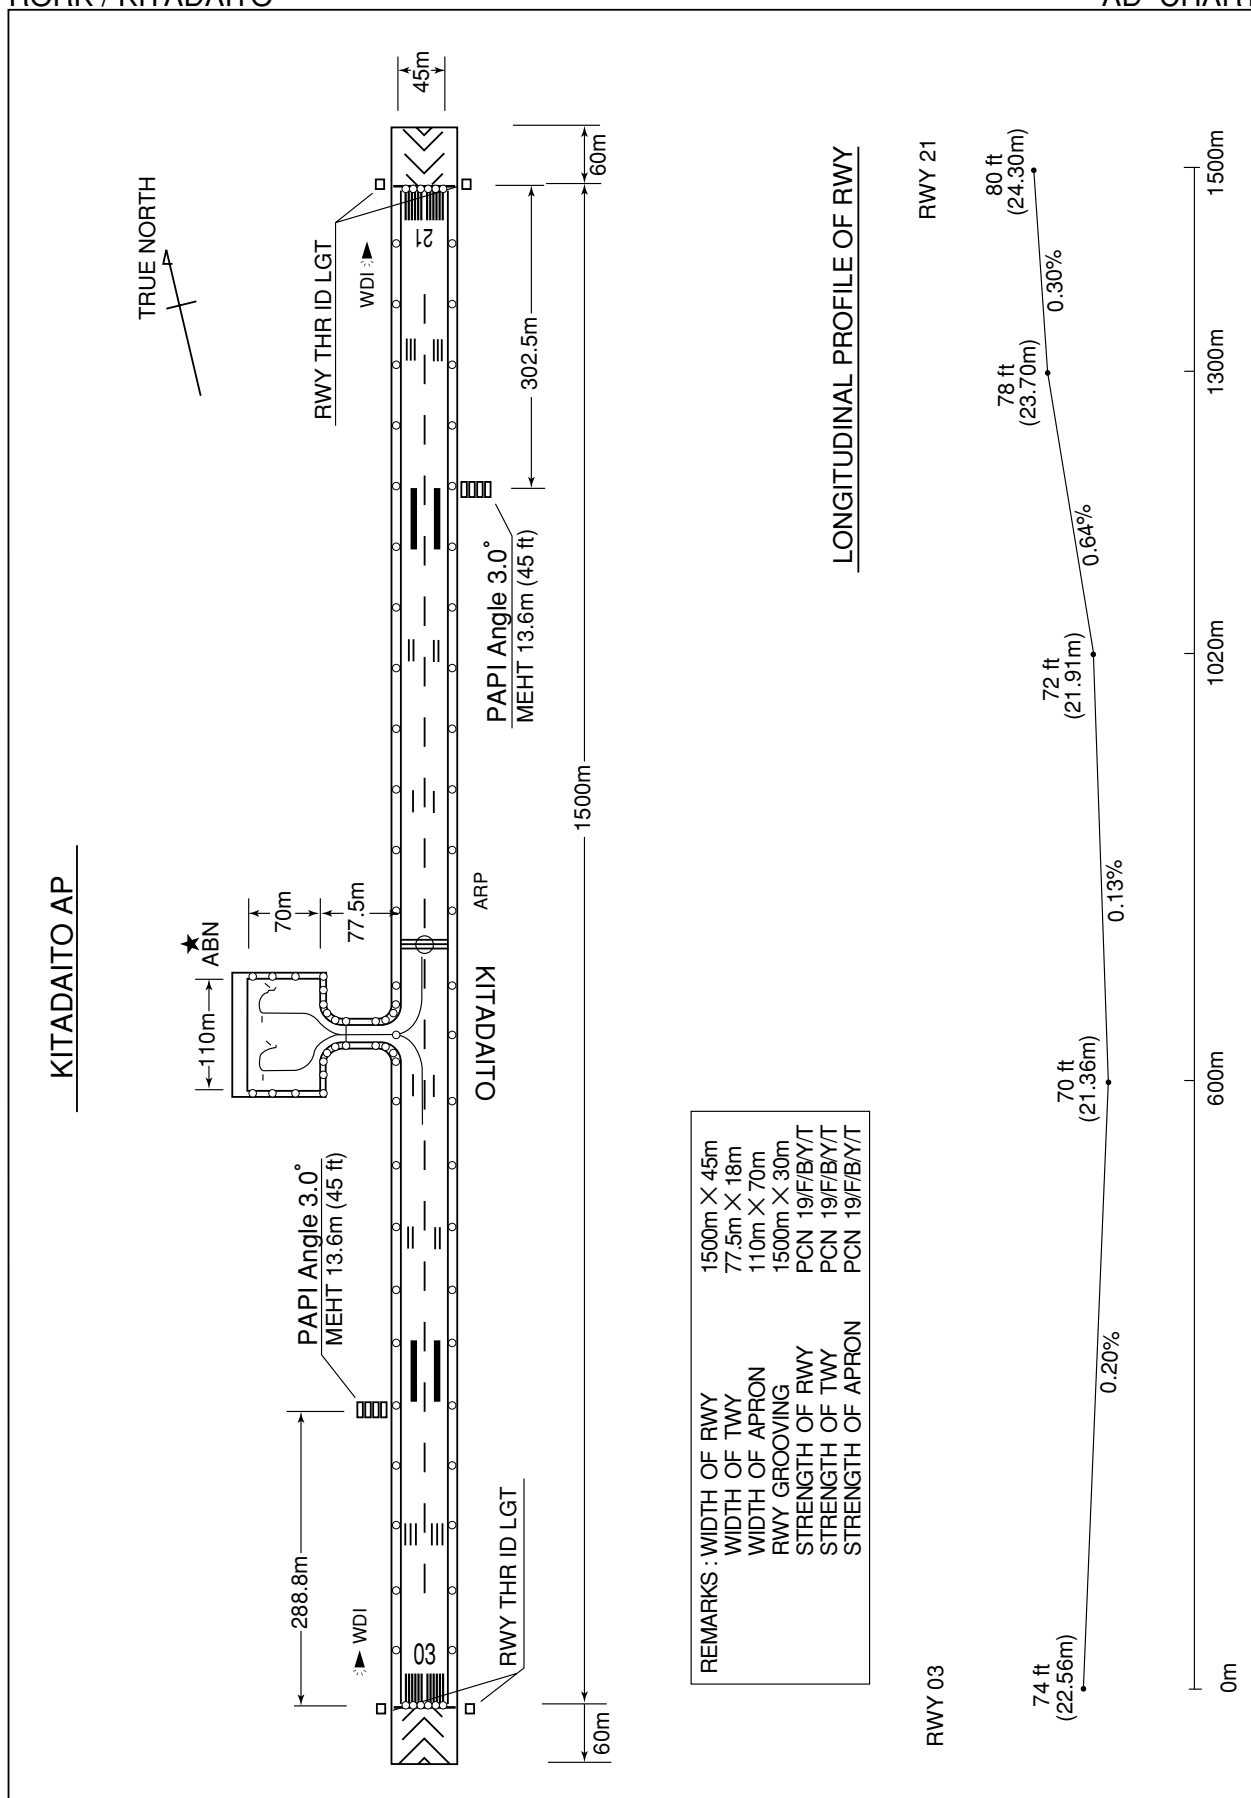

STANDARD DEPARTURE CHART -INSTRUMENT

RORK / KITADAITO

SID


SOUTH SIX DEPARTURE

RWY03 : Climb RWY HDG to 500FT, turn right, direct to MDE VOR/DME.


RWY21 : Climb to MDE VOR/DME.

Cross MDE VOR/DME at or above 2400FT.

SOUTH SIX DEPARTURE

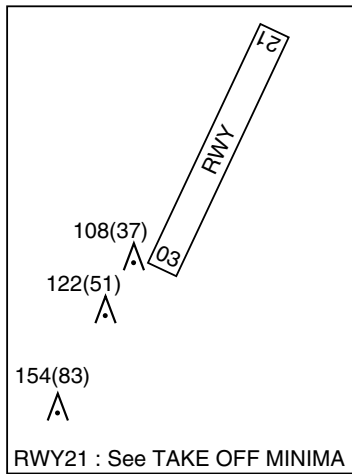

VOR/DME
MINAMIDAITO
117.8 MDE
CH-125X
25°51'16"N/131°15'50"E
200FT

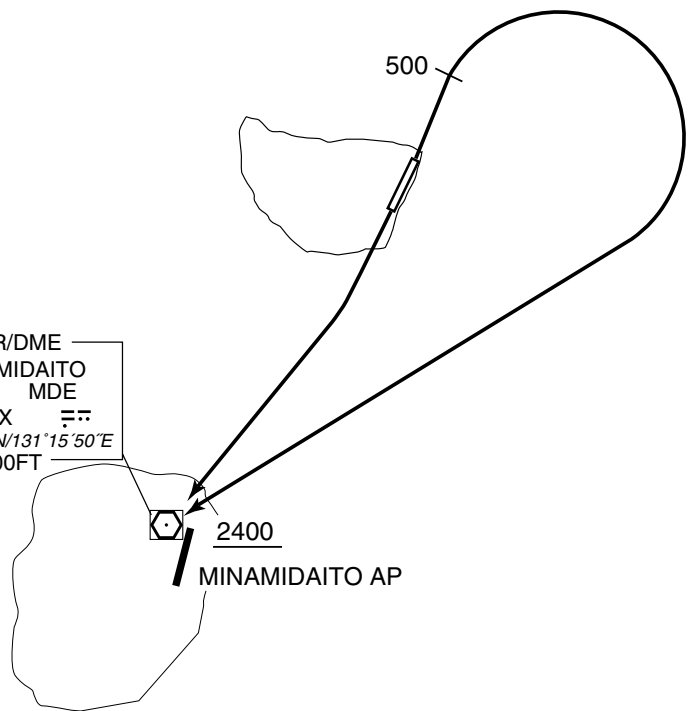

STANDARD DEPARTURE CHART -INSTRUMENT

RORK / KITADAITO

RNAV SID


CORCO NORTH ONE DEPARTURE

RNP1



Note GNSS required.

VAR 5°W (2015)

CORCO NORTH ONE DEPARTURE

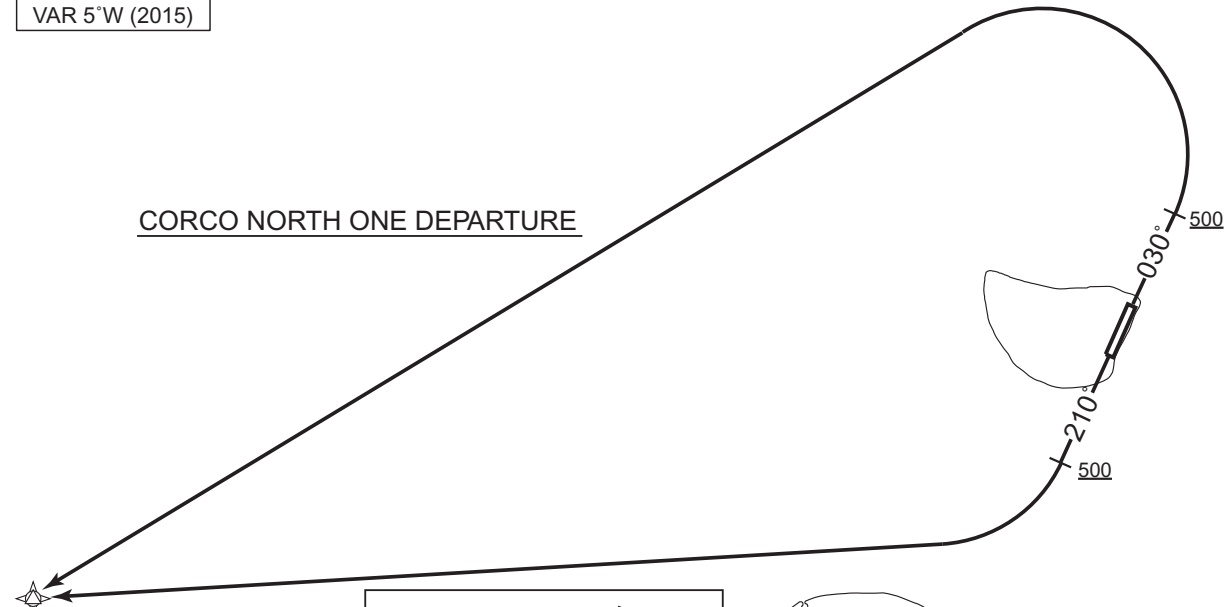

CORCO
255226.5N
1305915.1E
5000

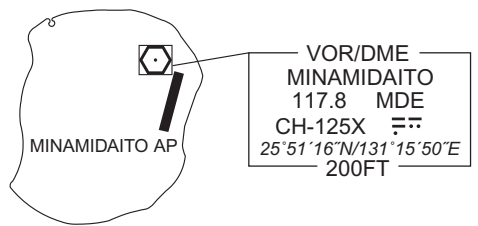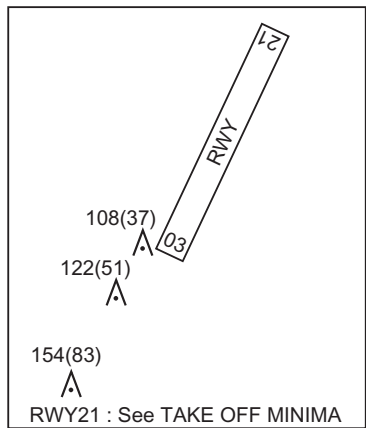

CORCO NORTH ONE DEPARTURE

RWY03 : Climb on HDG030° at or above 500FT, turn left direct to CORCO at or above 5000FT.
RWY21 : Climb on HDG210° at or above 500FT, turn right direct to CORCO at or above 5000FT.

NOTE RWY03 : 4.0% climb gradient required up to 500FT due to airspace restrictions only.

RWY03

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(^T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | - | - | 030 (025.4) | -4.9 | - | - | +500 | - | - | RNP1 |
| 002 | DF | CORCO | - | - | -4.9 | - | L | +5000 | - | - | RNP1 |

RWY21

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(^T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | - | - | 210 (205.4) | -4.9 | - | - | +500 | - | - | RNP1 |
| 002 | DF | CORCO | - | - | -4.9 | - | R | +5000 | - | - | RNP1 |


CHANGE : Navigation Specification(Basic RNP1 → RNP1).

INSTRUMENT APPROACH CHART


RORK / KITADAITO

VOR Z RWY03

| | | | |
|----------------------------------|---|--|----------|
| FUKUOKA CONTROL 124.5 - 279.5 | MINAMIDAITO VOR/DME 117.8 MDE CH-125X 25°51'16"N/131°15'50"E | DAITO RADIO 118.55 AFIS provided by Naha Airport Office | NO RADAR |
|----------------------------------|---|--|----------|

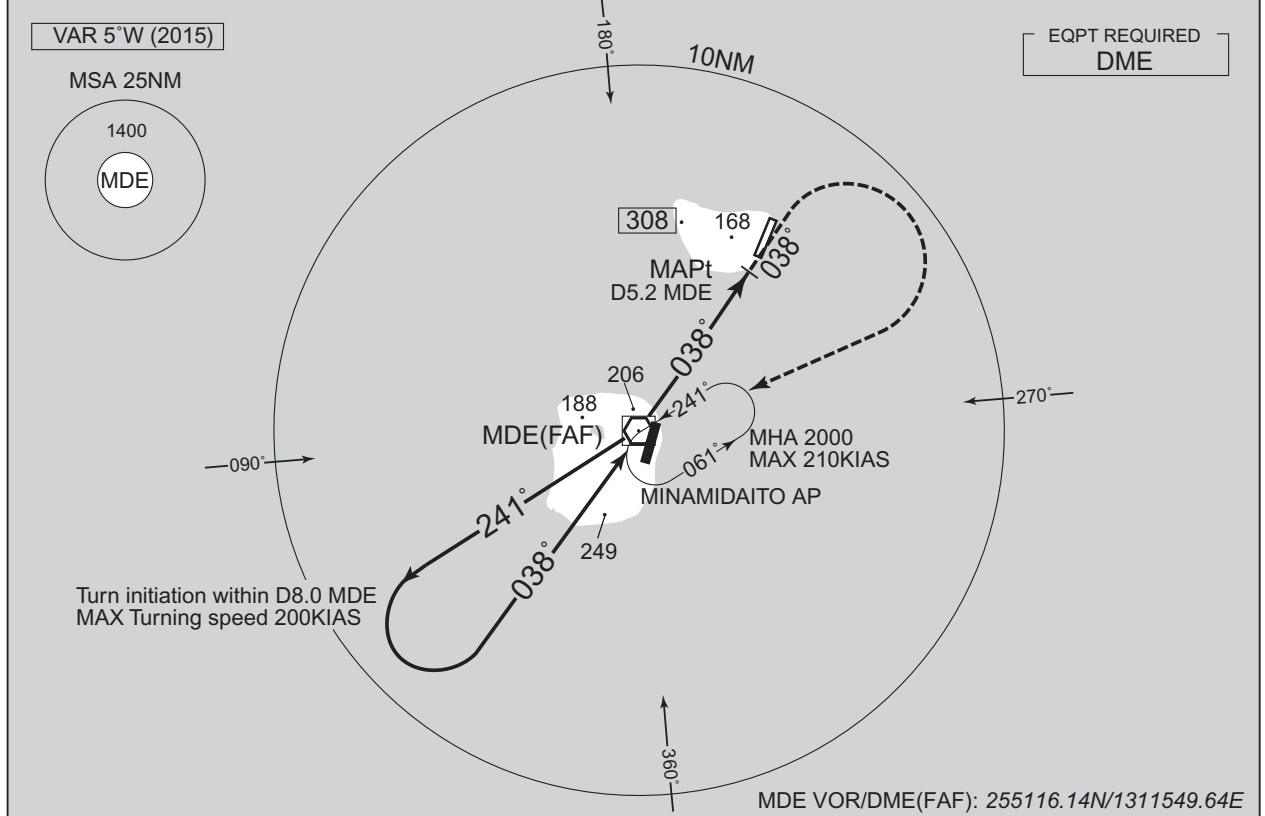

| | | | | | | |
|----------------------|------|------|------|------|-----|------|
| NM from MDE | FAF | 1 | 2 | 3 | 4 | MAPt |
| ALT (3.0° APCH Path) | 2030 | 1711 | 1393 | 1075 | 756 | - |

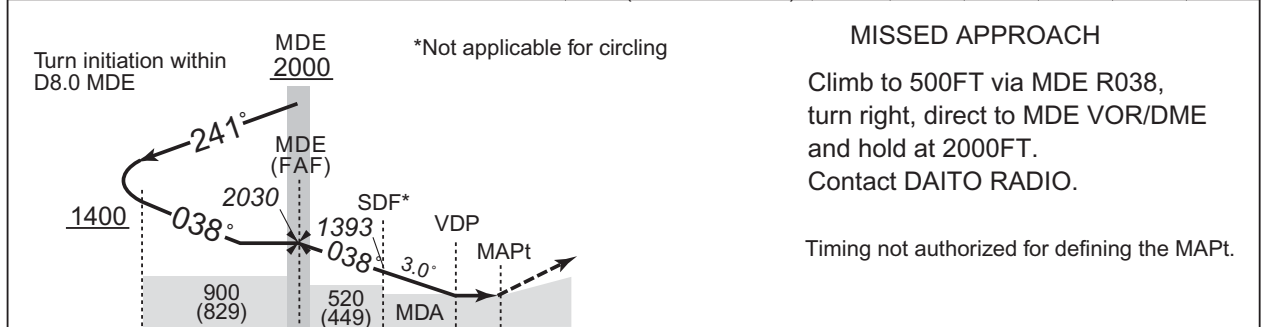

| | | | | | |
|-----|-----|-----|-----|-----|--------------|
| 0 | 2.0 | 4.8 | 5.2 | 6.0 | DME from MDE |
| 6.0 | 4.0 | 1.2 | 0.8 | 0 | NM to THR |

| | | | | |
|--------|-----------|--------------|-------------|------|
| MINIMA | | THR elev. 74 | AD elev. 71 | |
| CAT | CIRCLING | | | |
| | MDA(H) | CMV | MDA(H) | VIS |
| A | 480 (409) | 1500 | 560 (489) | 1600 |
| B | 480 (409) | 1500 | 560 (489) | 1600 |
| C | 490 (419) | 1800 | 630 (559) | 2400 |
| D | - | - | - | - |


CHANGE : ATC call sign.

INSTRUMENT APPROACH CHART


RORK / KITADAITO

VOR Y RWY03

| | | | |
|----------------------------------|---|--|----------|
| FUKUOKA CONTROL 124.5 - 279.5 | MINAMIDAITO VOR/DME 117.8 MDE CH-125X 25°51'16"N/131°15'50"E | DAITO RADIO 118.55 AFIS provided by Naha Airport Office | NO RADAR |
|----------------------------------|---|--|----------|

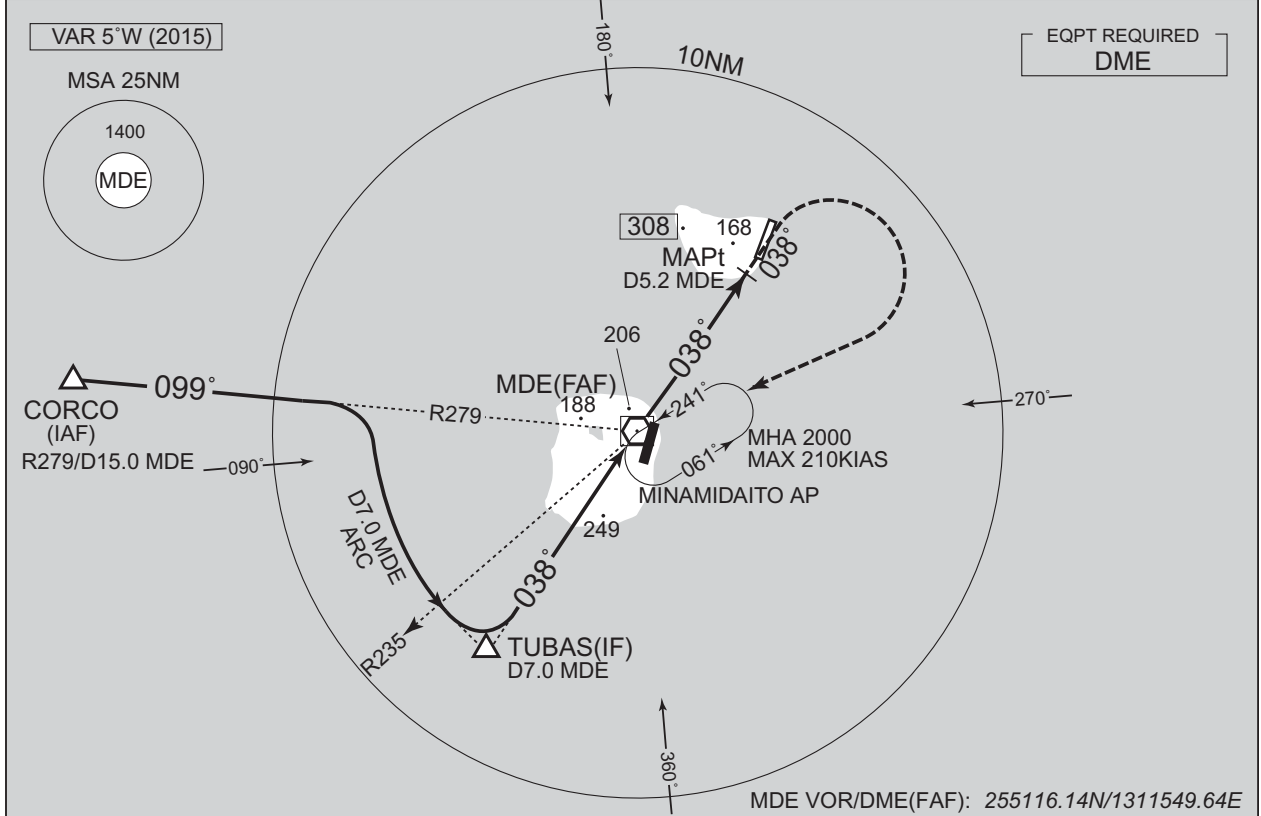

| | | | | | | |
|----------------------|------|------|------|------|-----|------|
| NM from MDE | FAF | 1 | 2 | 3 | 4 | MAPt |
| ALT (3.0° APCH Path) | 2030 | 1711 | 1393 | 1075 | 756 | - |

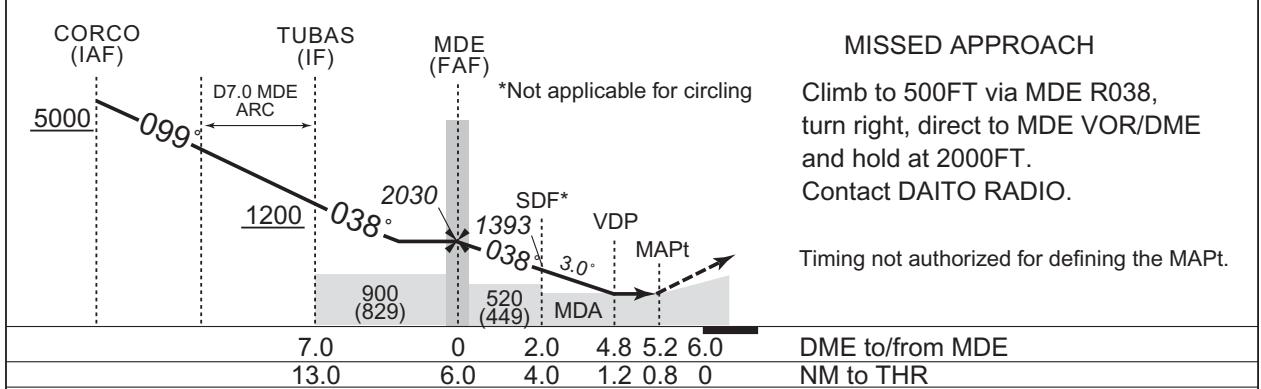


| | | | | |
|--------|-----------|--------------|-------------|------|
| MINIMA | | THR elev. 74 | AD elev. 71 | |
| CAT | CIRCLING | | | |
| | MDA(H) | CMV | MDA(H) | VIS |
| A | 480 (409) | 1500 | 560 (489) | 1600 |
| B | 490 (419) | 1800 | 630 (559) | 2400 |
| C | - | - | - | - |
| D | - | - | - | - |


CHANGE : ATC call sign.

INSTRUMENT APPROACH CHART

RORK / KITADAITO

RNP RWY03

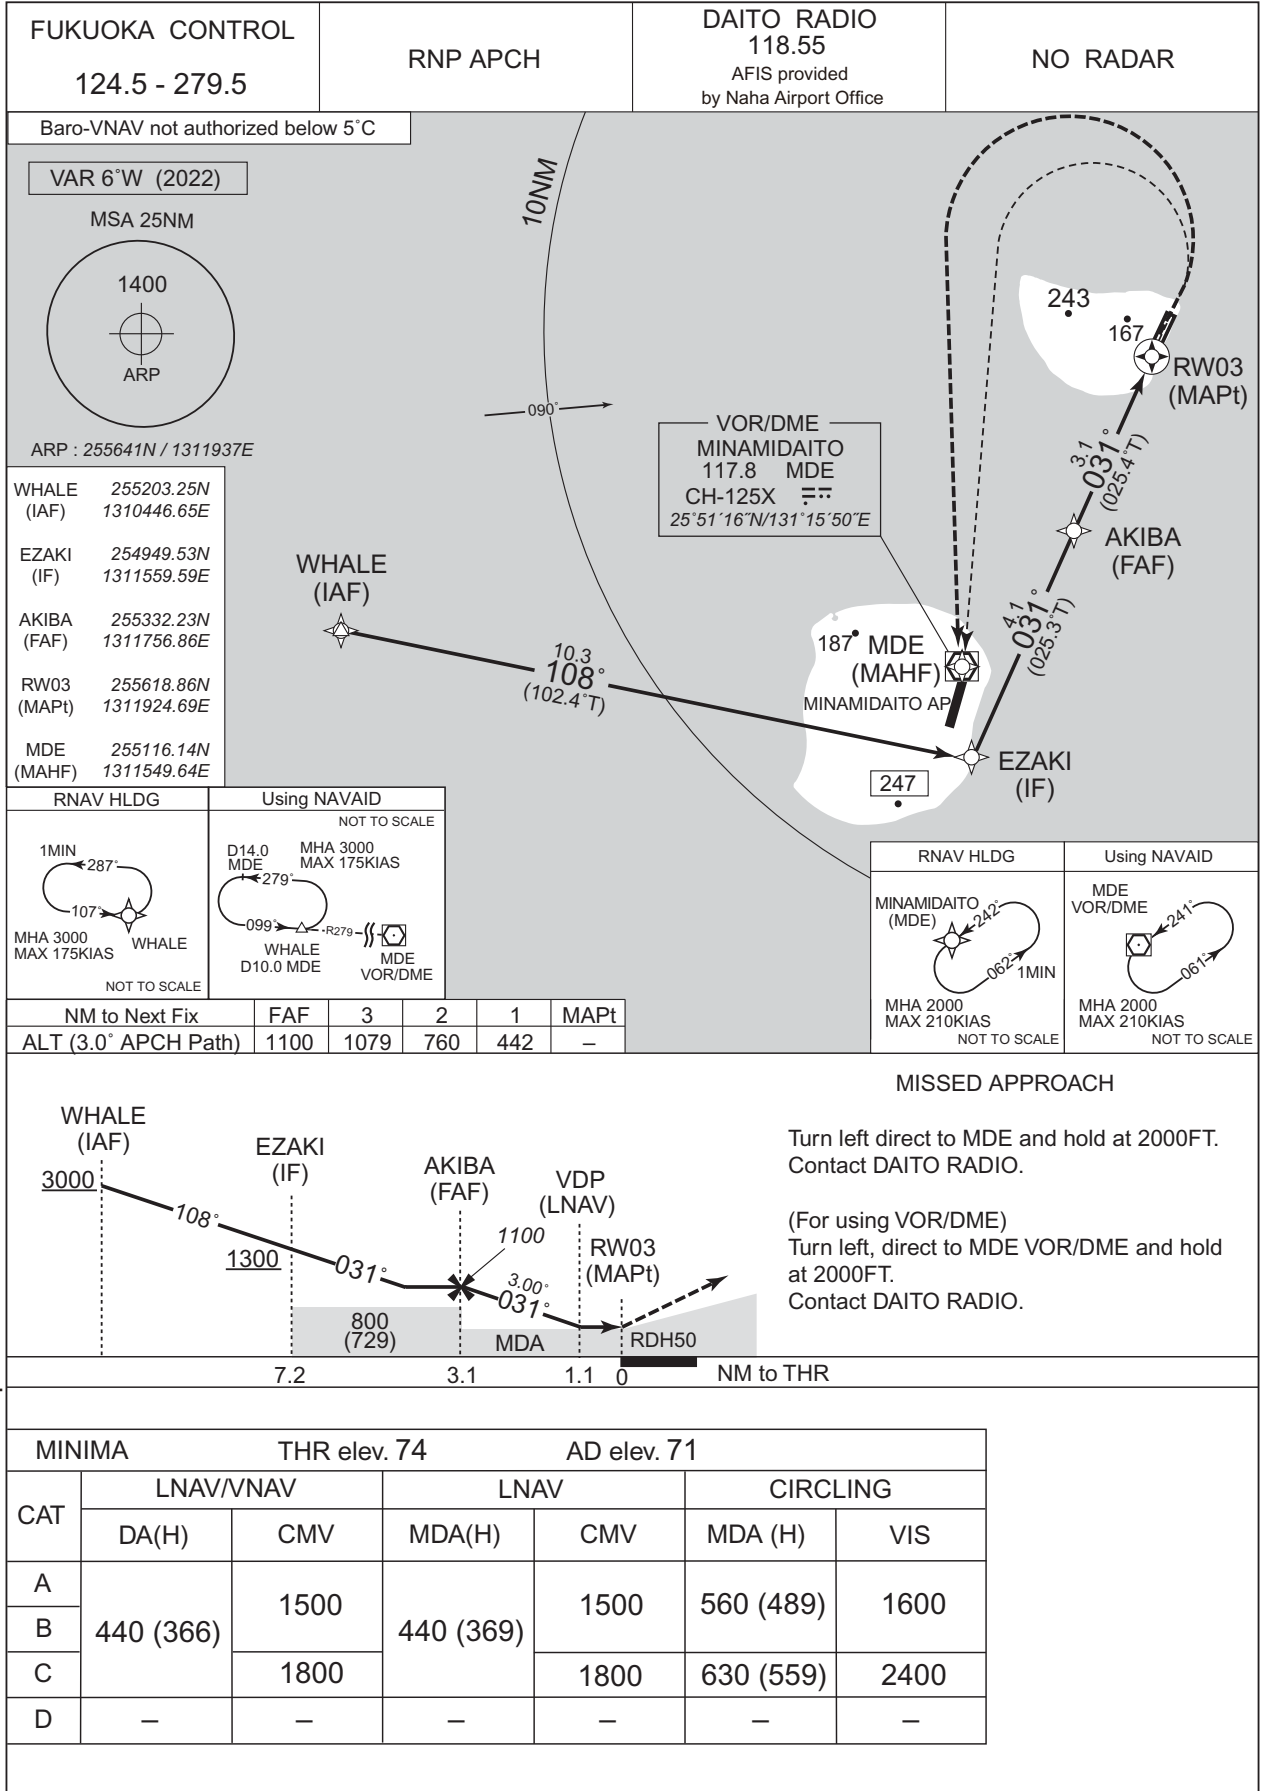

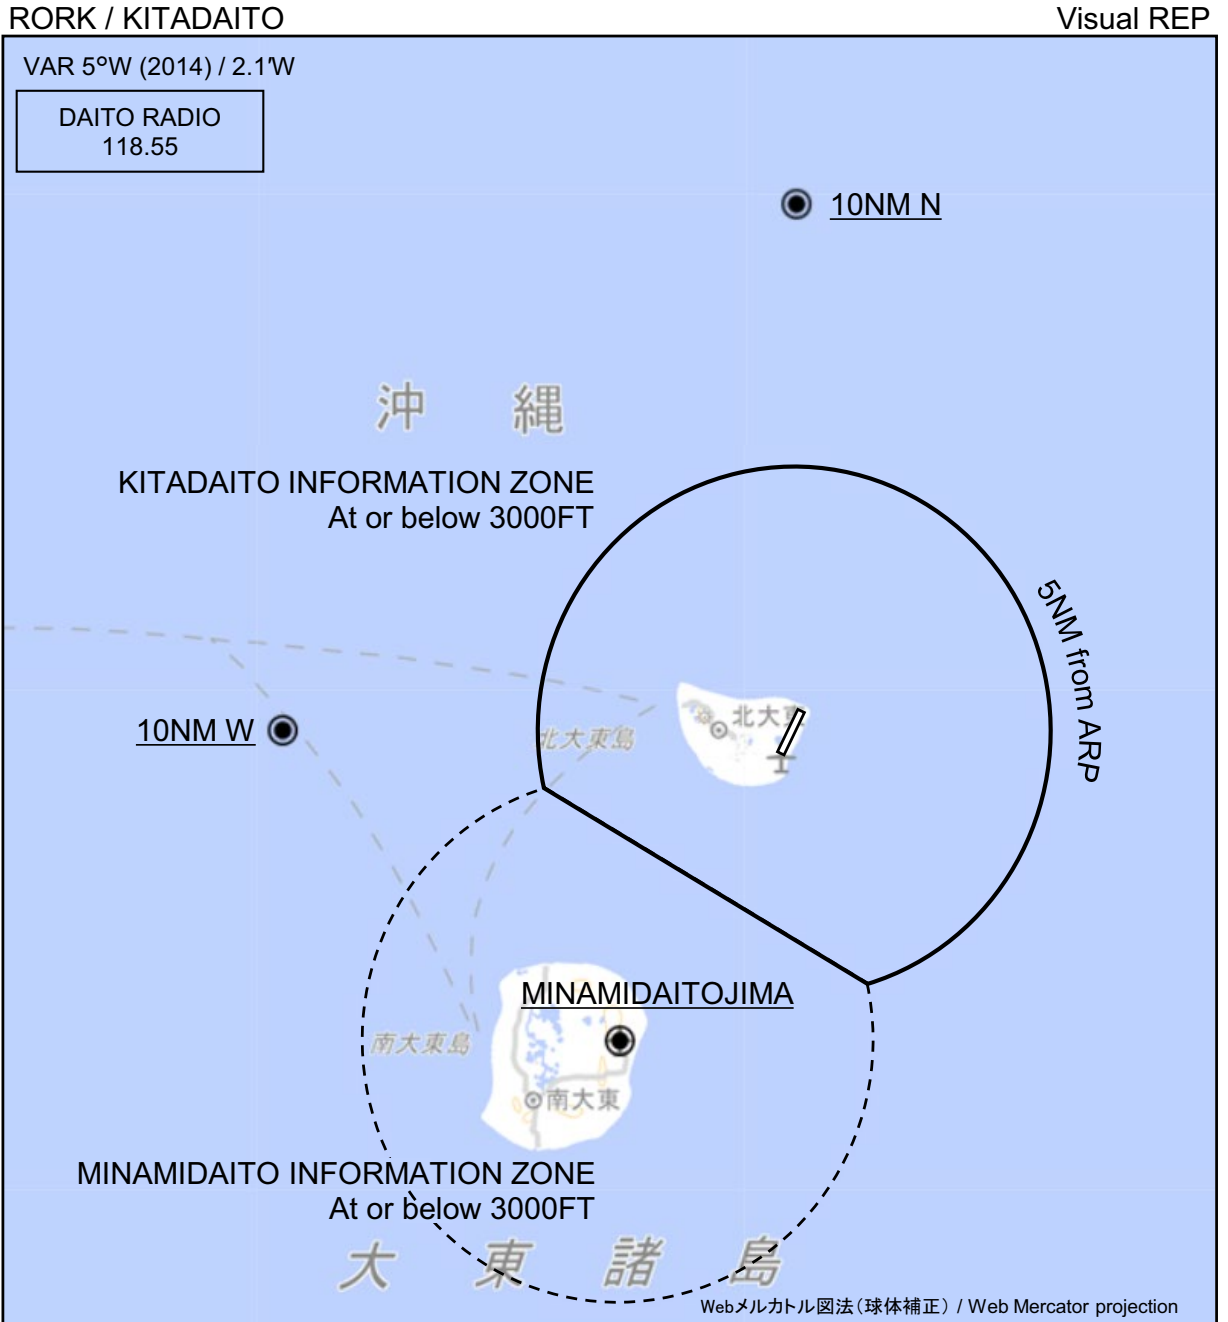

CHANGE : Map updated. BRG/DIST from ARP.

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

| Call sign | BRG / DIST from ARP | Remarks |
|-------------------------|---------------------|------------------------------|
| 10NM N | 360°T / 10.0NM | 海上 Over the sea |
| 10NM W | 270°T / 10.0NM | 海上 Over the sea |
| 南大東島 Minamidaitojima | 210°T / 6.8NM | 南大東空港 Minamidaito Airport |

RORK / KITADAITO

Minimum Vectoring Altitude CHART

CHANGE : Shape of segment. Minimum vectoring altitude.

