



RJOT / TAKAMATSU

AD CHART

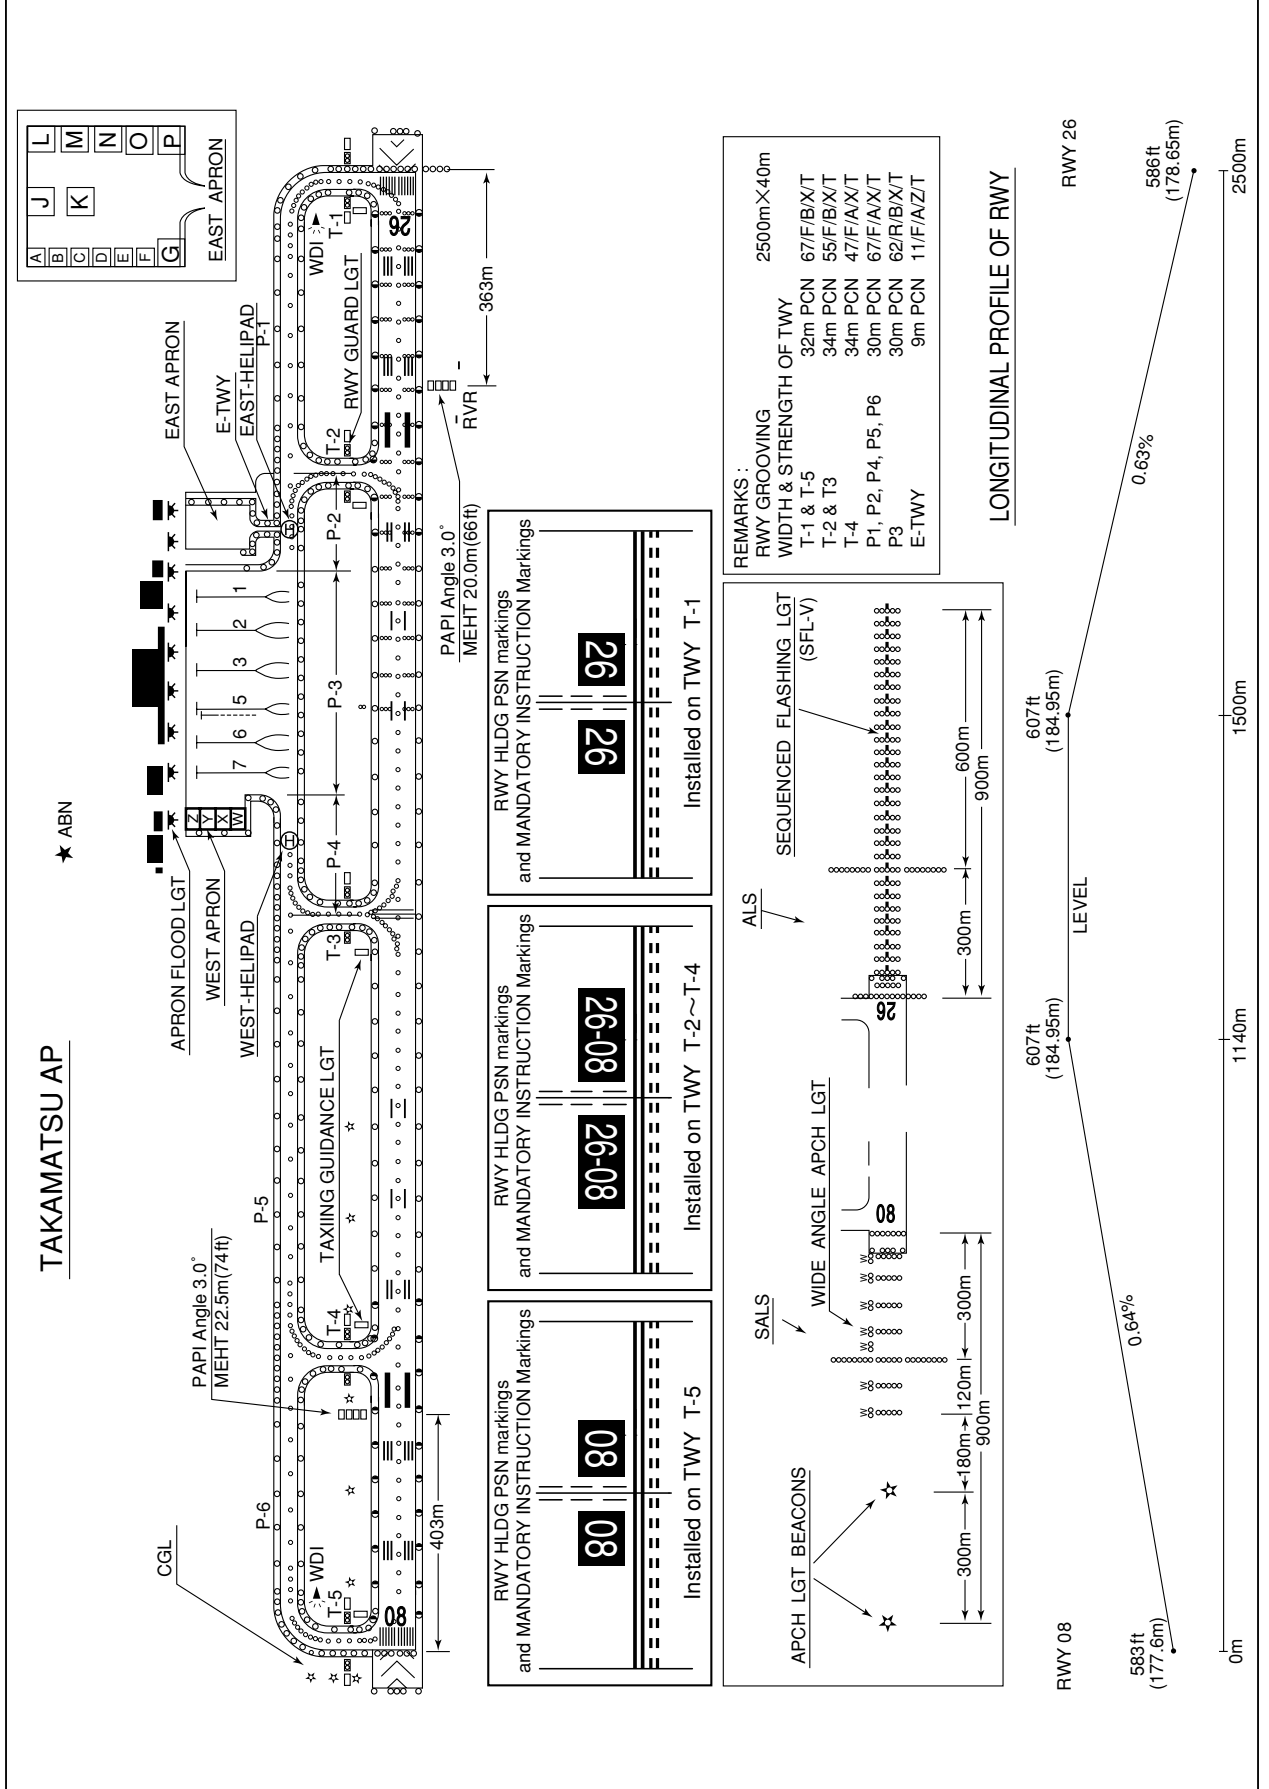

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)


DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

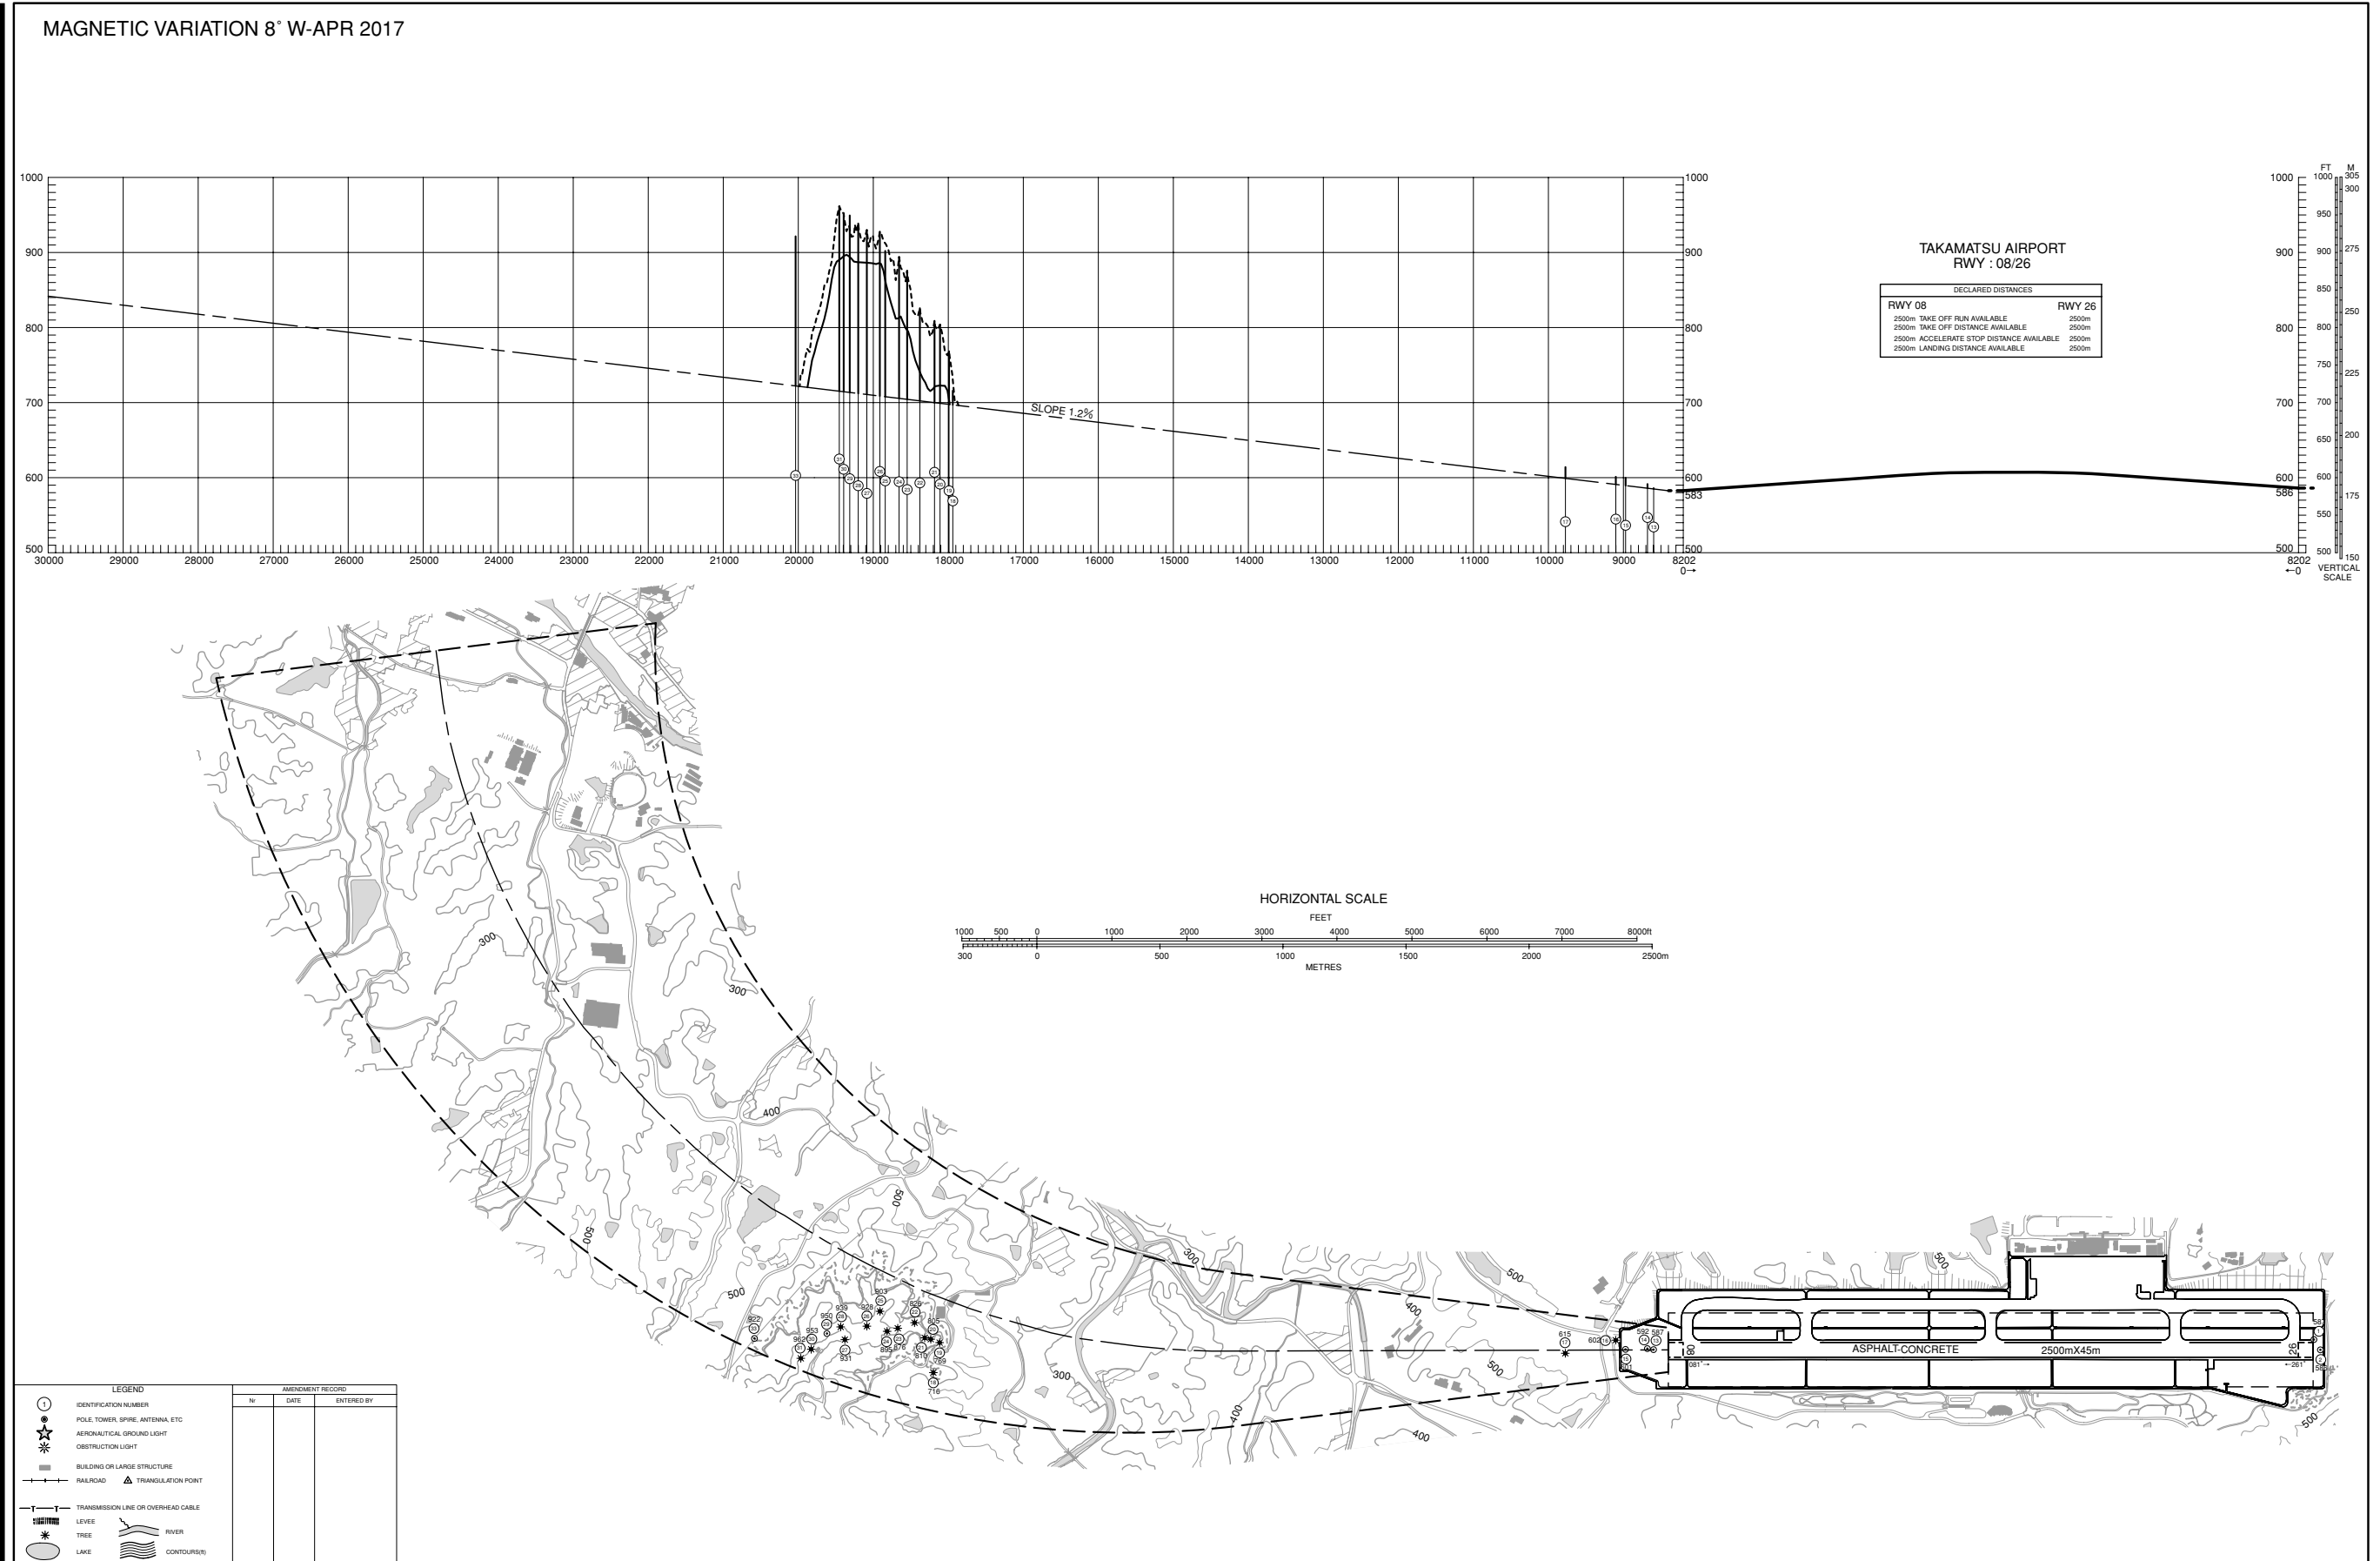

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)



DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

MAGNETIC VARIATION 8° W-APR 2017

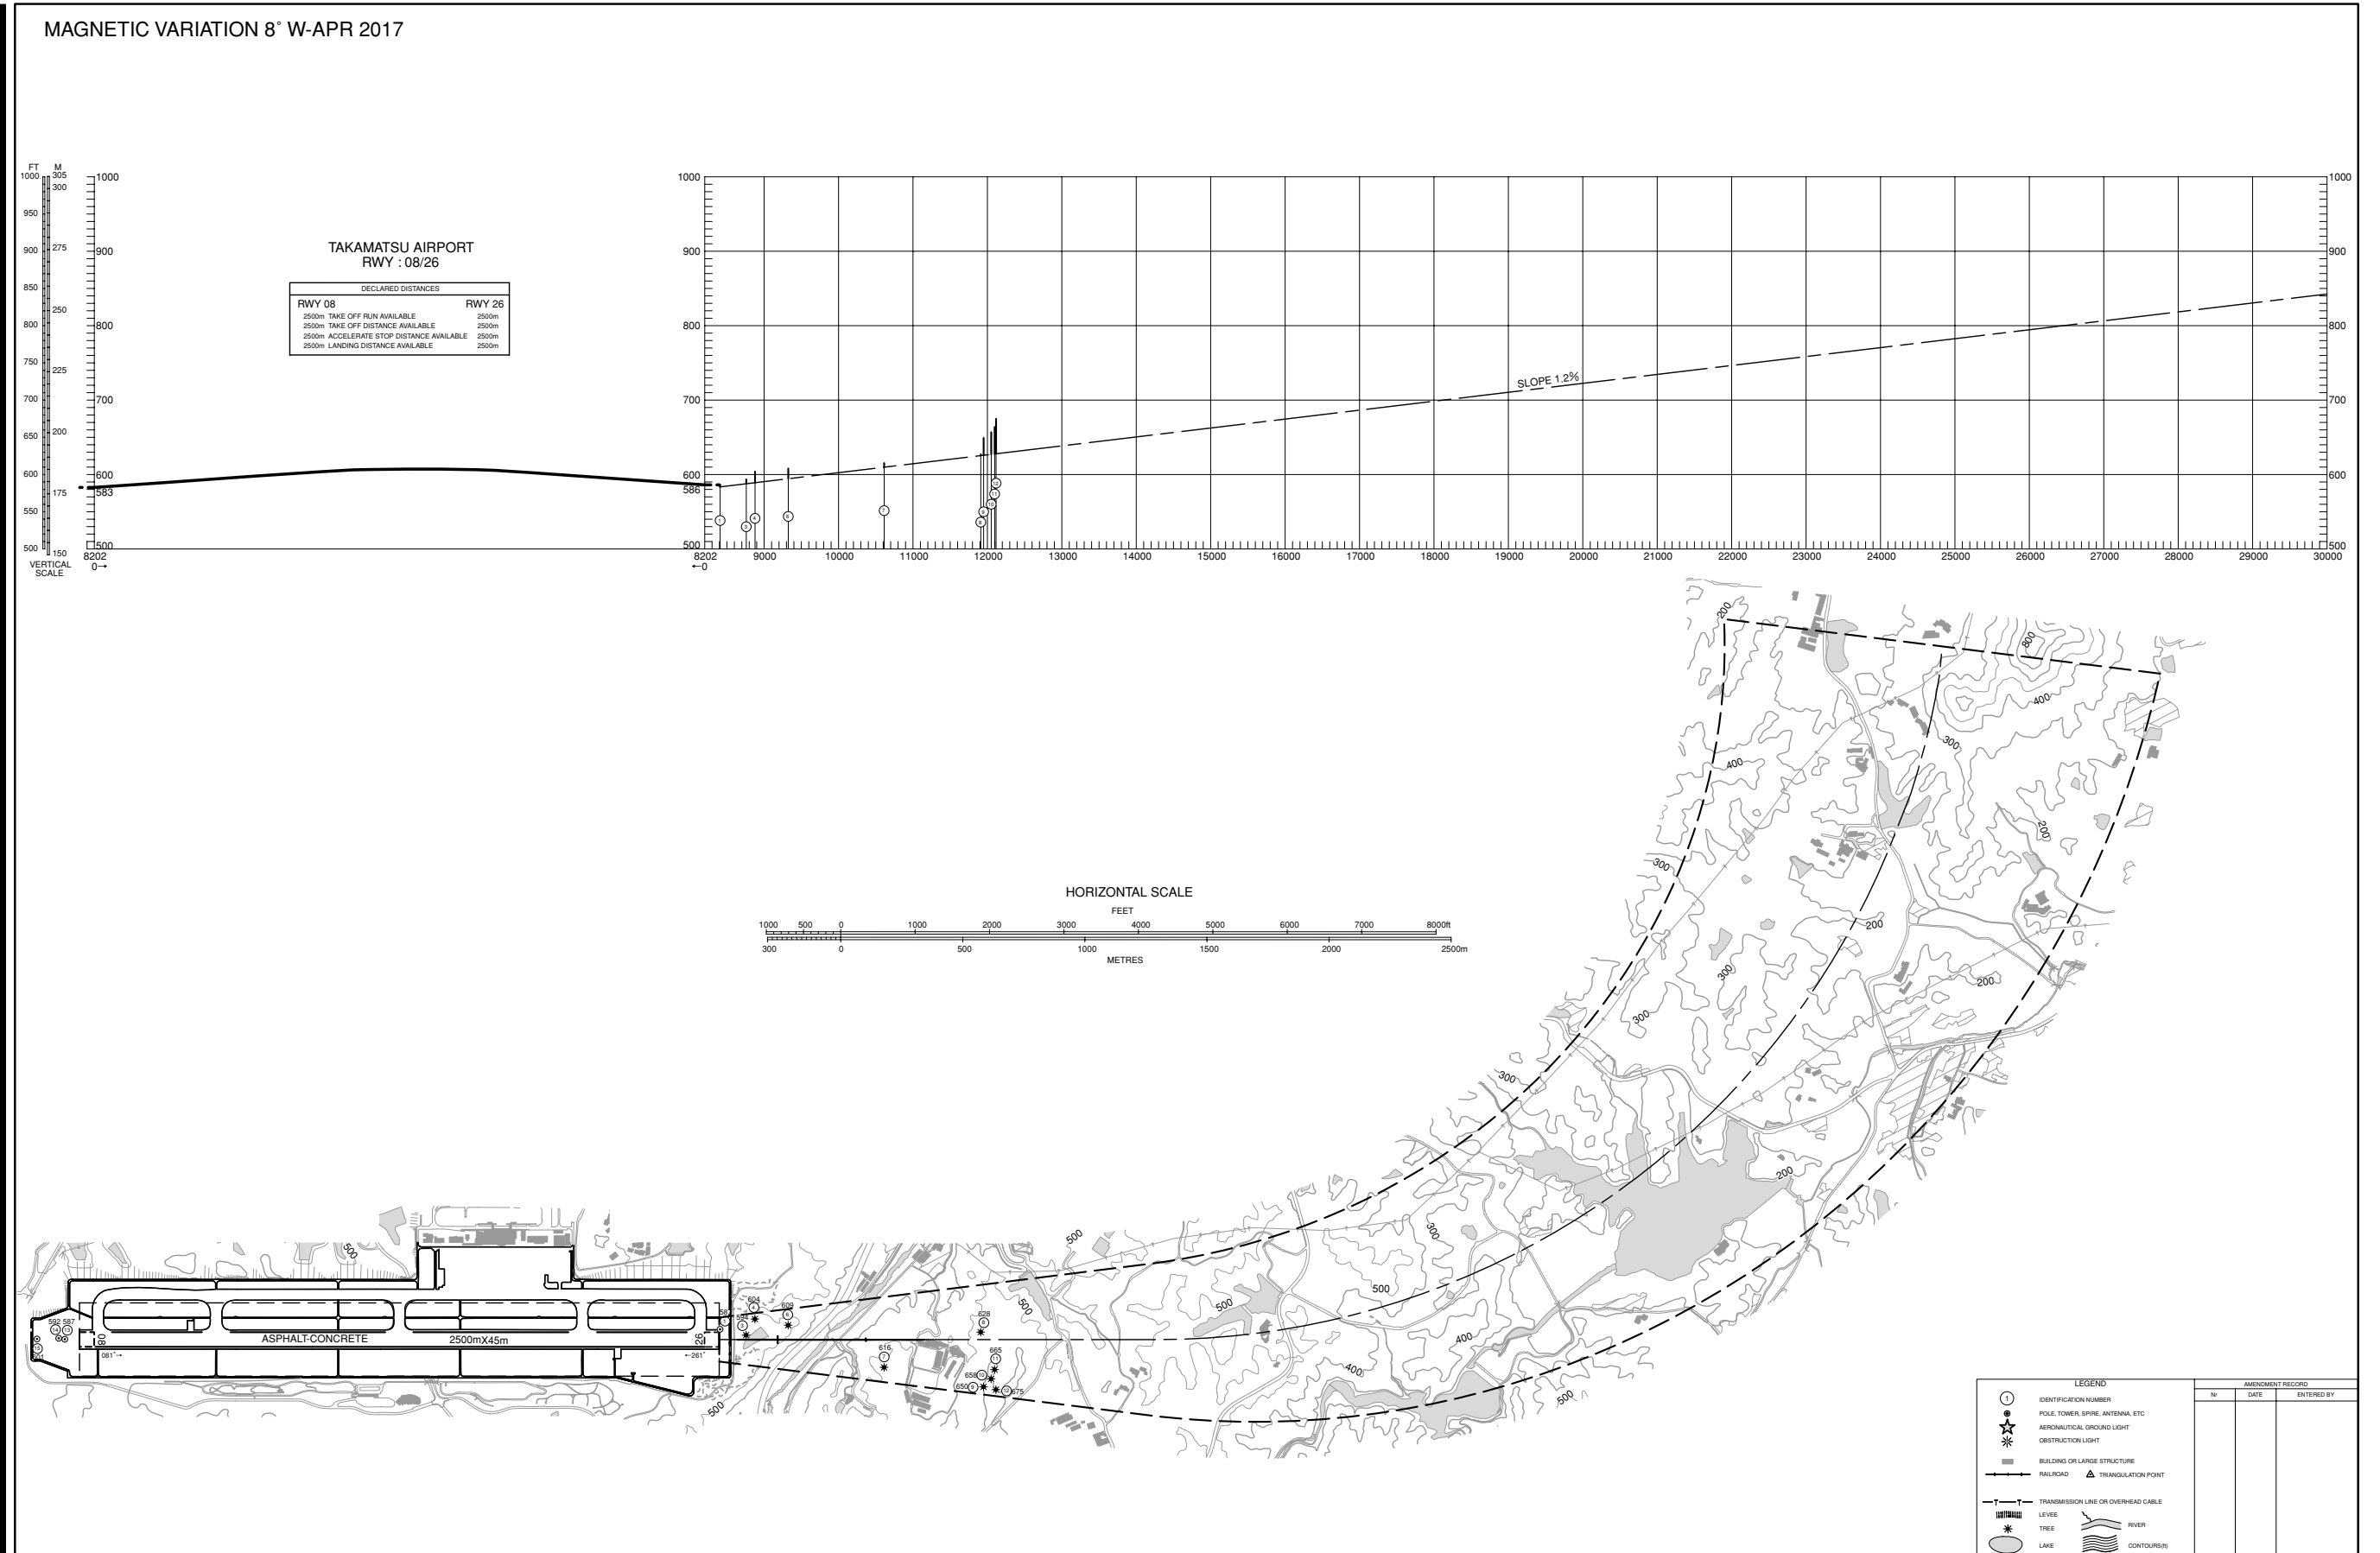


AERODROME OBSTACLE CHART-ICAO
TYPE B

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

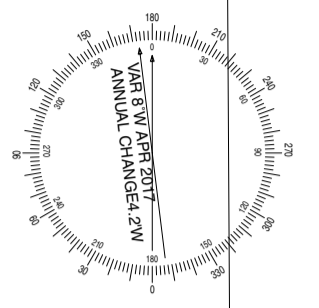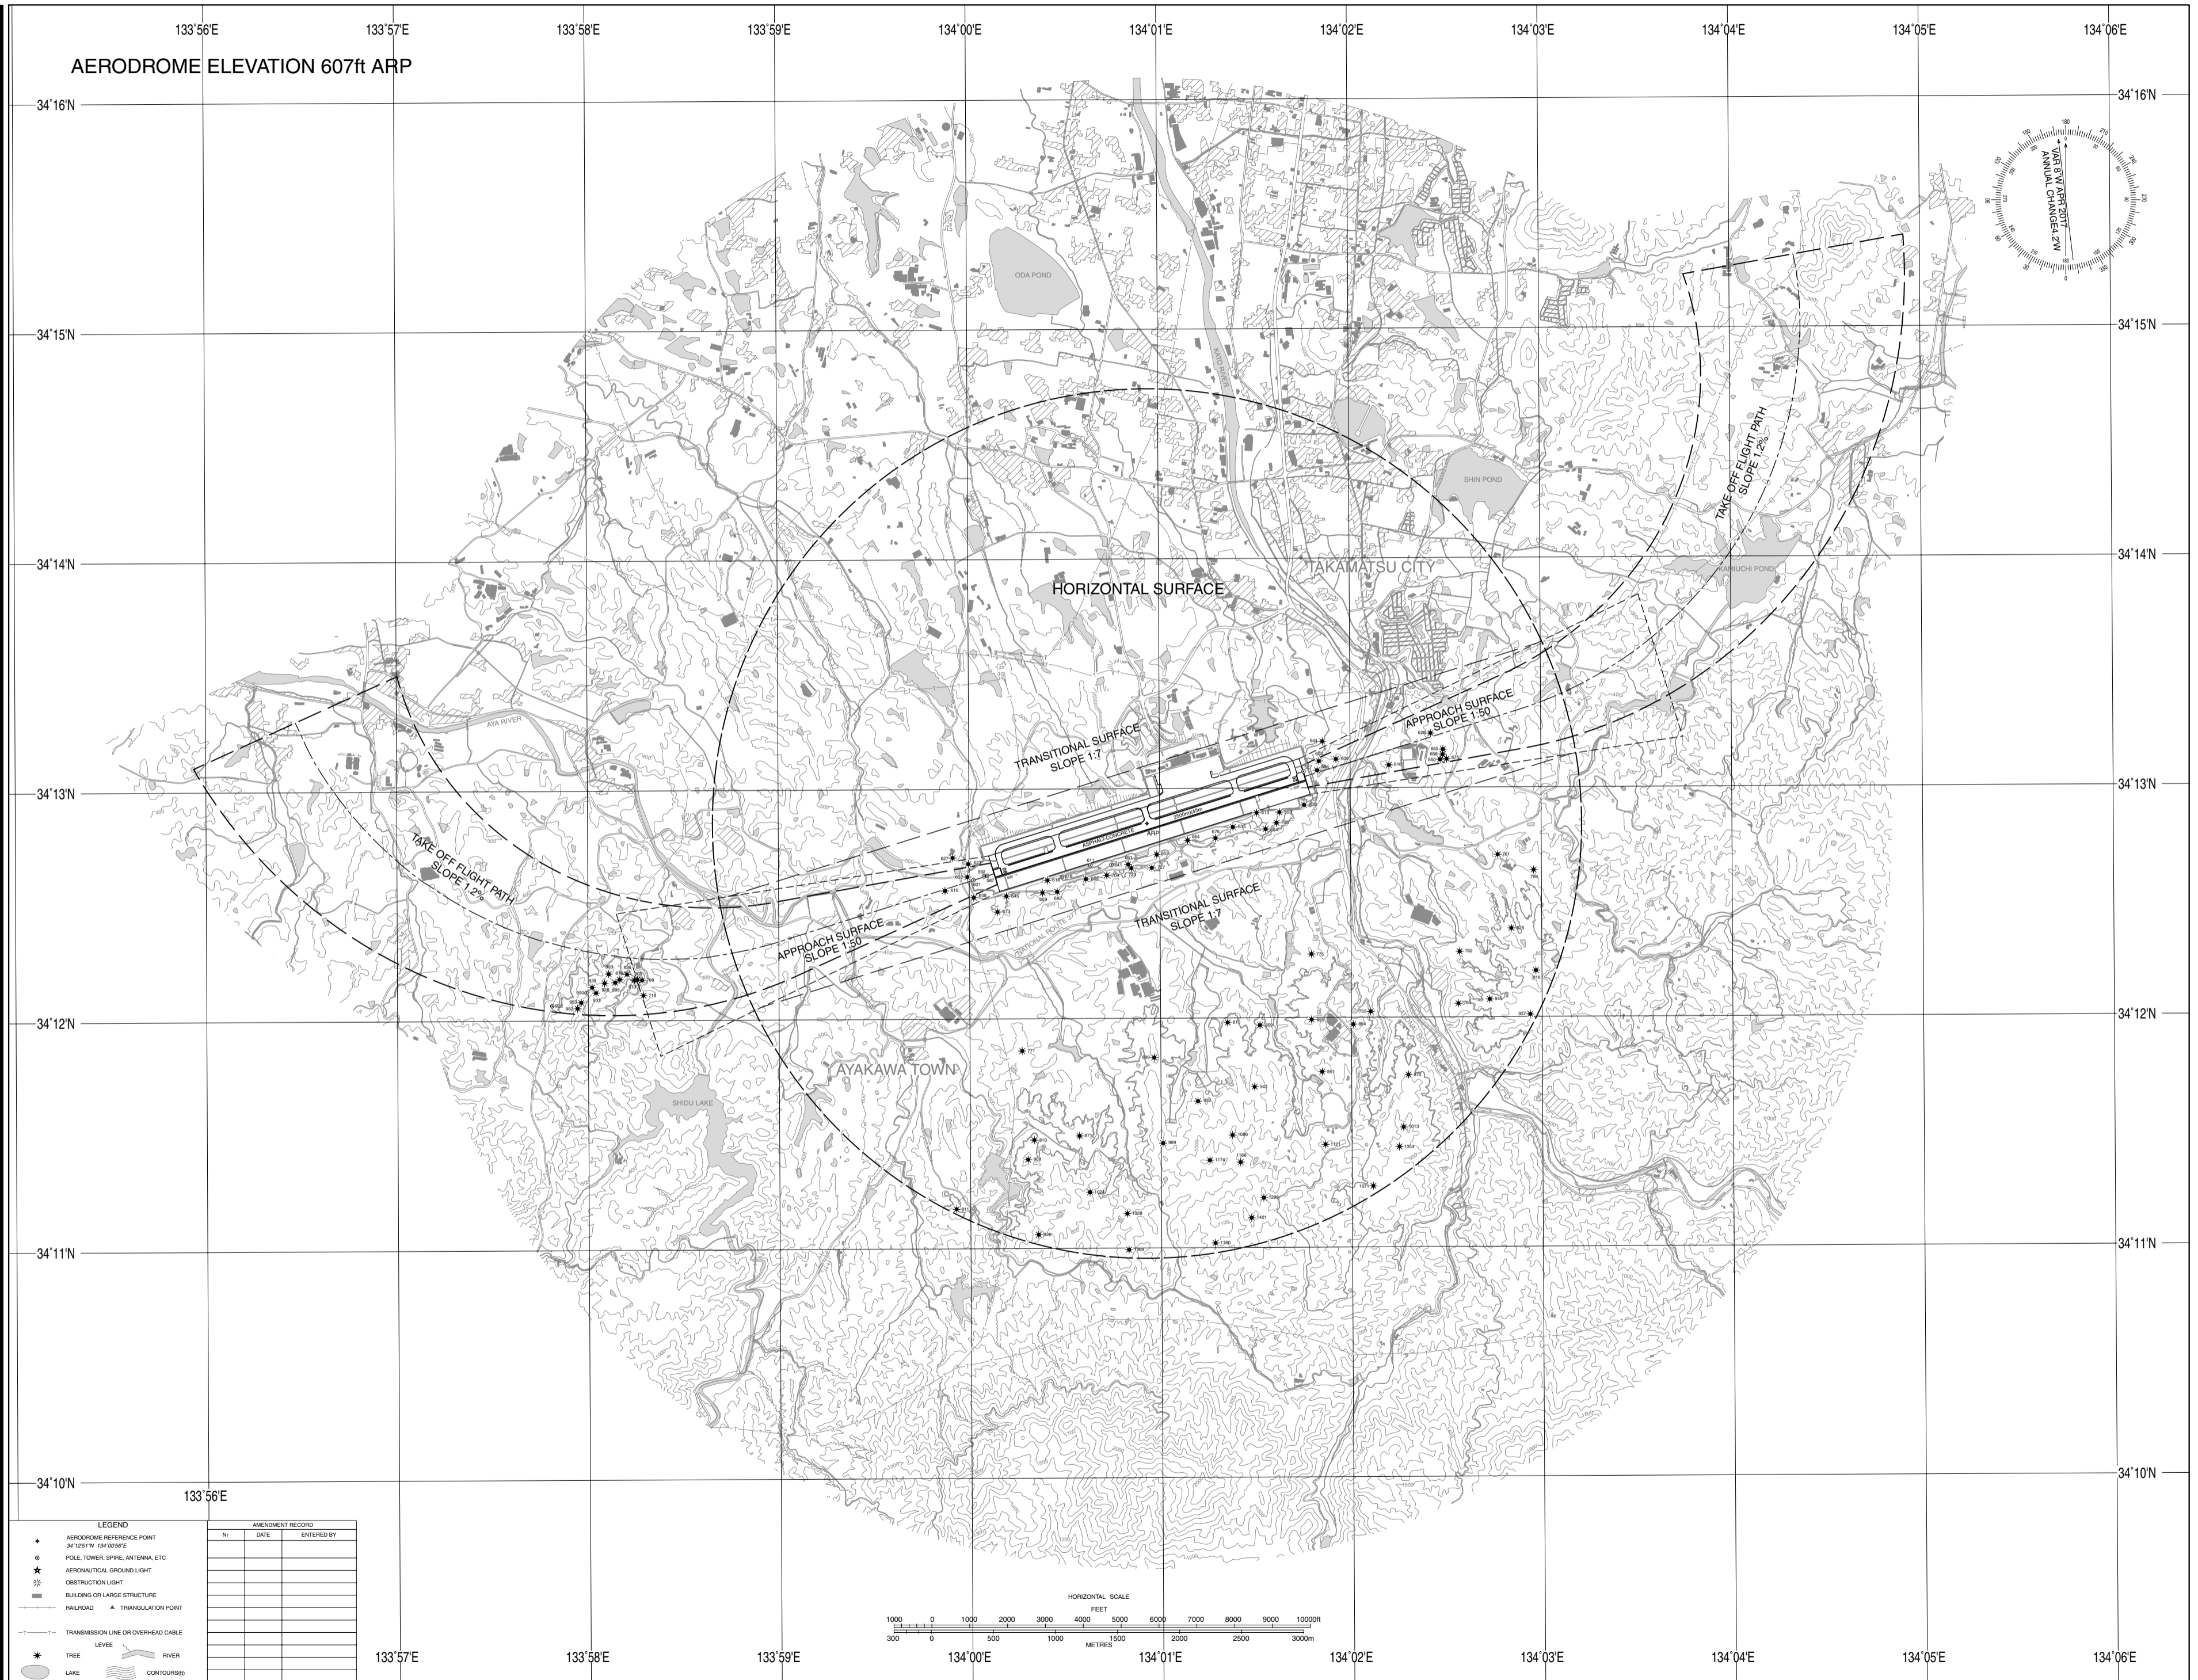

LEGEND		AMENDMENT RECORD		
+	AERODROME REFERENCE POINT 34°12'51"N 134°00'56"E	No.	DATE	ENTERED BY
⊙	POLE, TOWER, SPIRE, ANTENNA, ETC.			
★	AERONAUTICAL OBSTRUCTION LIGHT			
✳	OBSTRUCTION LIGHT			
■	BUILDING OR LARGE STRUCTURE			
—	RAILROAD			
▲	TRIANGULATION POINT			
—	TRANSMISSION LINE OR OVERHEAD CABLE			
—	LEVEE			
—	RIVER			
⊙	LAKE			
—	CONTOUR(S)			

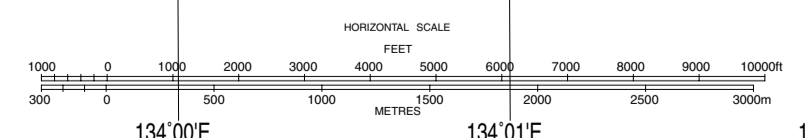

STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

SID

KAGAWA NORTH THREE DEPARTURE

RWY 08 : Climb RWY HDG to 1700FT, turn left HDG307° ...

RWY 26 : Climb RWY HDG to 2200FT, turn right HDG037° ...

...to intercept and proceed via KTE R352 to OYE VOR/DME.

Note : RWY 08 : 5.0% climb gradient required up to 1700FT.

OBST ALT 755FT located at 0.7NM 100° FM end of RWY08.

RWY 26 : 6.6% climb gradient required up to 2200FT.

OBST ALT 1772FT located at 3.3NM 255° FM end of RWY26.

KAGAWA REVERSAL EIGHT DEPARTURE

RWY 08 : Climb RWY HDG to 1700FT, turn left HDG322° ...

RWY 26 : Climb RWY HDG to 2200FT, turn right HDG052° ...

...to intercept and proceed via KTE R007 to 13.0DME, turn left direct to KTE VOR/DME.

Note : RWY 08 : 5.0% climb gradient required up to 1700FT.

OBST ALT 755FT located at 0.7NM 100° FM end of RWY08.


RWY 26 : 6.6% climb gradient required up to 2200FT.

OBST ALT 1772FT located at 3.3NM 255° FM end of RWY26.

STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

SID

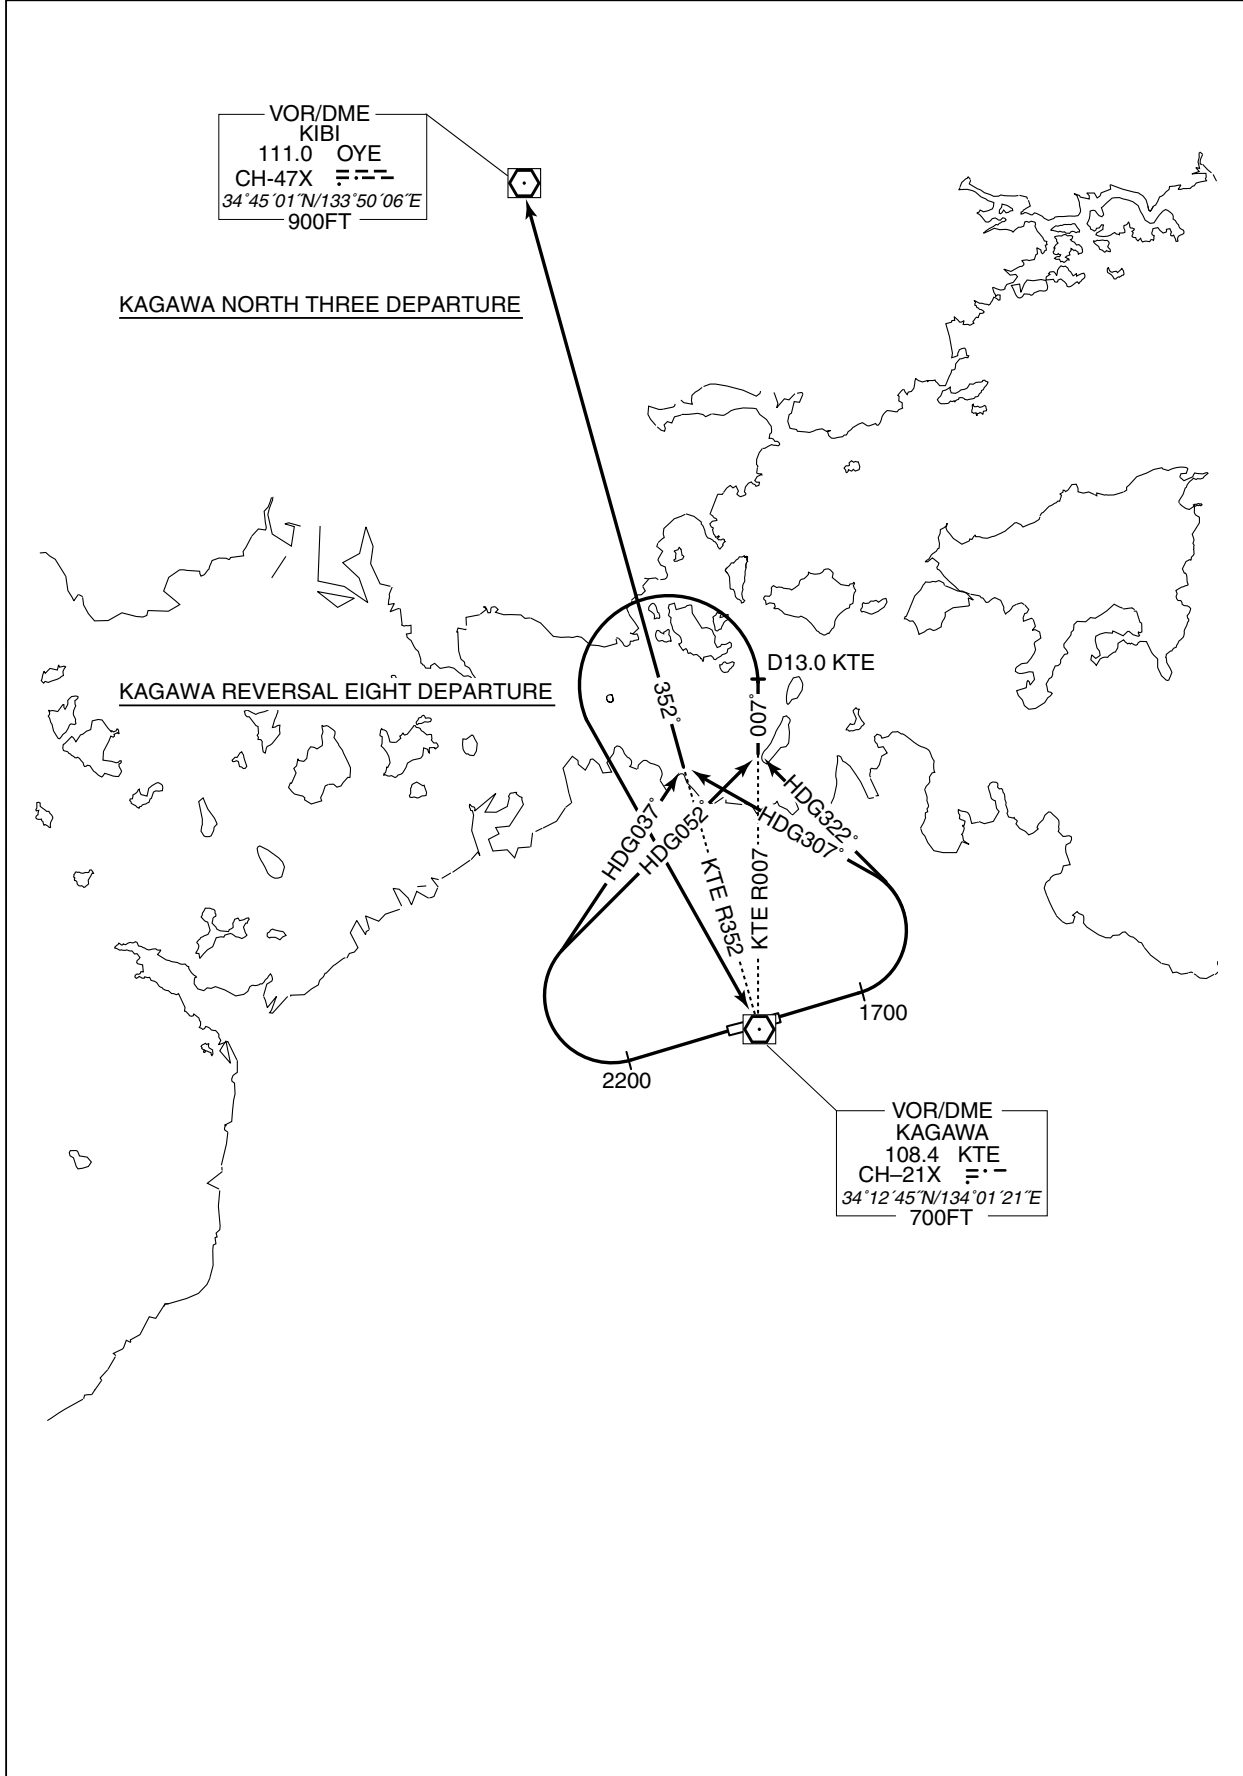


STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID and TRANSITION

<p>SAYOH TWO DEPARTURE MIYAZU TRANSITION</p>	<p>RNAV1</p>
---	---------------------

<p>Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.</p>	<p>Critical DME</p>	<p>RWY08 : OYE 1.0NM from DER - 3.0NM from DER STD 1.0NM from DER - 3.0NM from DER KTE 25.0NM to SAYOH - 21.0NM to SAYOH RWY26 : KTE 2.0NM from DER - 3.0NM from DER 25.0NM to SAYOH - 20.0NM to SAYOH STD 2.0NM from DER - 3.0NM from DER 44.0NM to SAYOH - 35.0NM to SAYOH OYE 14.0NM to SAYOH - SAYOH MIYAZU TRANSITION STD : SAYOH - 1.7NM to CHIZU YME : SAYOH - 1.7NM to CHIZU</p>
<p>DME GAP</p>	<p>RWY08 : DER - 1.0NM from DER RWY26 : DER - 2.0NM from DER MIYAZU TRANSITION 1.7NM to CHIZU - YME</p>	
<p>Inappropriate Nav aids</p>	<p>See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1</p>	

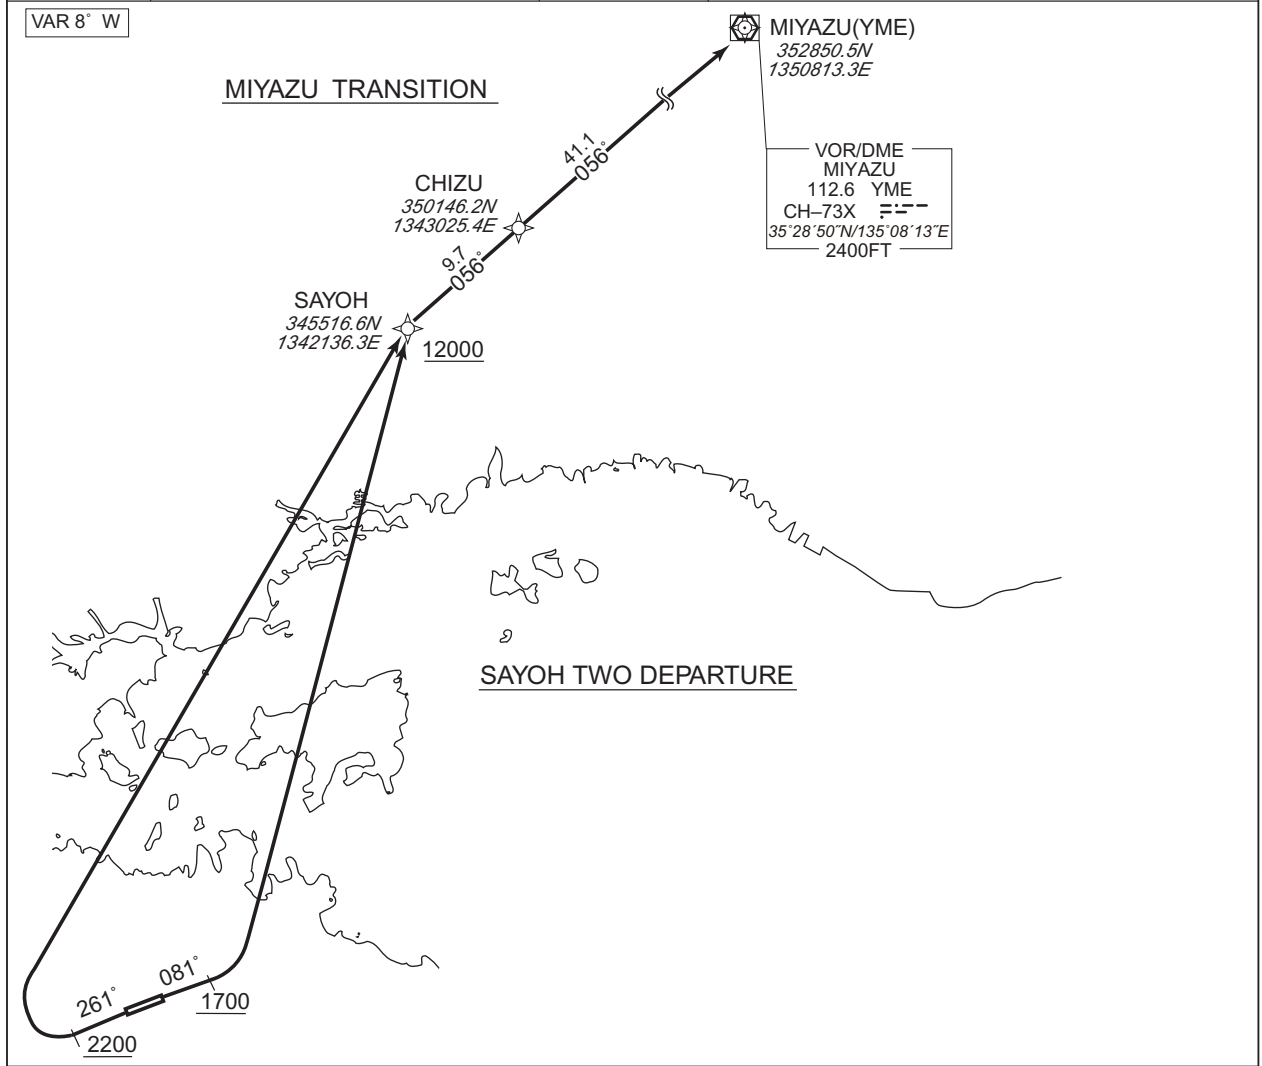

CHANGE : Critical DME. DME GAP.

<p>SAYOH TWO DEPARTURE RWY08 : Climb on HDG081° at or above 1700FT, turn left direct to SAYOH at or above 12000FT. RWY26 : Climb on HDG261° at or above 2200FT, turn right direct to SAYOH at or above 12000FT.</p> <p>Note RWY08 : 5.0% climb gradient required up to 1700FT. OBST ALT 755FT located at 0.7NM 100° FM end of RWY08. RWY26 : 6.6% climb gradient required up to 2200FT. OBST ALT 1772FT located at 3.3NM 255° FM end of RWY26.</p>	<p>Critical DME</p>
---	---------------------

<p>MIYAZU TRANSITION From SAYOH, to CHIZU, to YME.</p>

STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID and TRANSITION

SAYOH TWO DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	081 (072.9)	-7.8	—	—	+1700	—	—	RNAV1
002	DF	SAYOH	—	—	-7.8	—	L	+12000	—	—	RNAV1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	261 (252.9)	-7.8	—	—	+2200	—	—	RNAV1
002	DF	SAYOH	—	—	-7.8	—	R	+12000	—	—	RNAV1

MIYAZU TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SAYOH	—	—	-7.8	—	—	—	—	—	RNAV1
002	TF	CHIZU	—	056 (048.0)	-7.8	9.7	—	—	—	—	RNAV1
003	TF	YME	—	056 (048.6)	-7.8	41.1	—	—	—	—	RNAV1

CHANGE : VAR. SID renamed. PROC course.


STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID

WASYU THREE DEPARTURE		RNAV 1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.	Critical DME	RWY08 : OYE 1.0NM from DER - 3.0NM from DER 37.0NM to WASYU - 30.0NM to WASYU 1.0NM to WASYU - WASYU STD 1.0NM from DER - 3.0NM from DER 37.0NM to WASYU - 33.0NM to WASYU RWY26 : KTE 2.0NM from DER - 3.0NM from DER STD 2.0NM from DER - 3.0NM from DER OYE 1.0NM to WASYU - WASYU
	DME GAP	RWY08 : DER - 1.0NM from DER RWY26 : DER - 2.0NM from DER
	Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

VAR 8° W

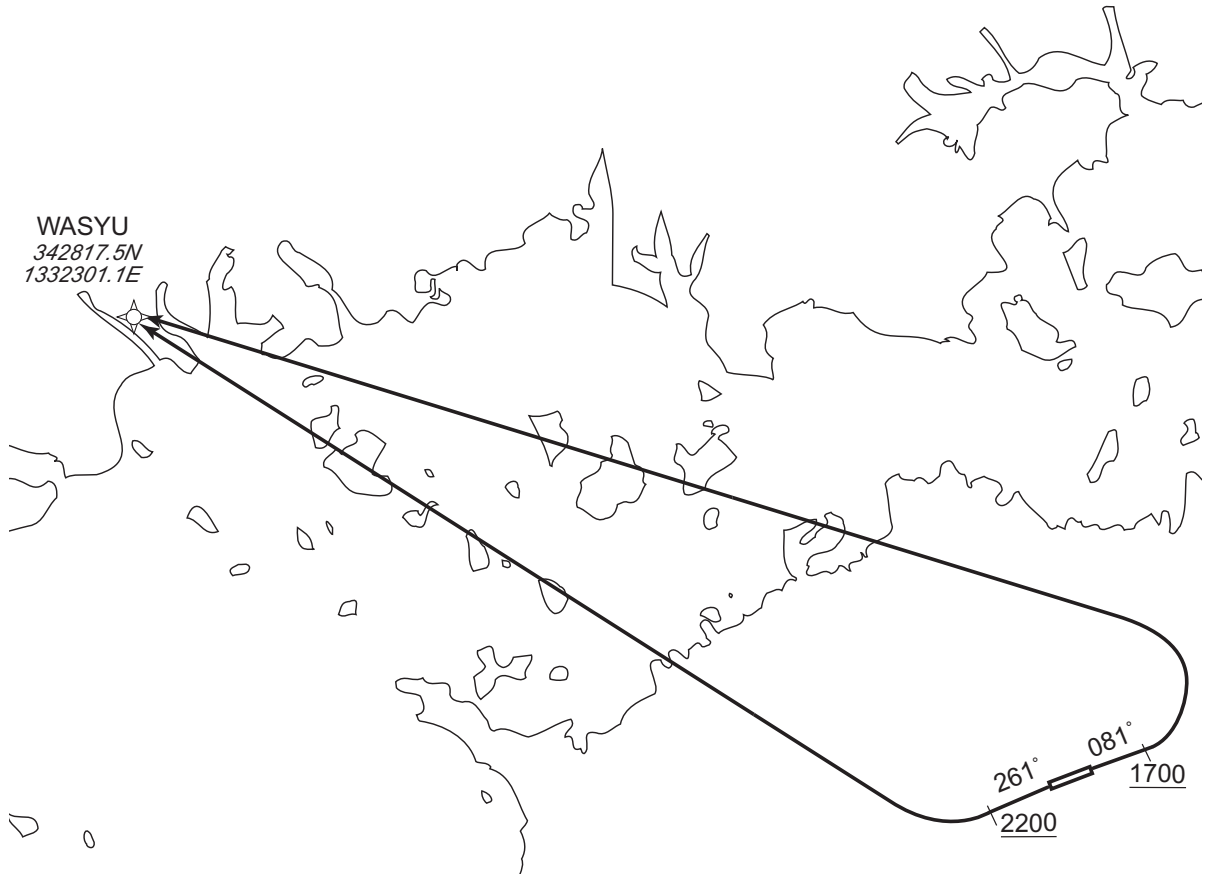

CHANGE : Critical DME. DME GAP added.

RWY08 : Climb on HDG081° at or above 1700FT, turn left direct to WASYU.
 RWY26 : Climb on HDG261° at or above 2200FT, turn right direct to WASYU.

Note RWY08: 5.0% climb gradient required up to 1700FT.
 OBST ALT 755FT located at 0.7NM 100° FM end of RWY08.
 RWY26: 6.6% climb gradient required up to 2200FT.
 OBST ALT 1772FT located at 3.3NM 255° FM end of RWY26.

STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID

WASYU THREE DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	081 (072.9)	-7.8	—	—	+1700	—	—	RNAV1
002	DF	WASYU	—	—	-7.8	—	L	—	—	—	RNAV1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	261 (252.9)	-7.8	—	—	+2200	—	—	RNAV1
002	DF	WASYU	—	—	-7.8	—	R	—	—	—	RNAV1

CHANGE : VAR. PROC renamed. PROC course.

STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID and TRANSITION

TAROH THREE DEPARTURE MIHO TRANSITION		RNAV 1
<p>Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.</p>	Critical DME	<p>RWY08 : OYE 1.0NM from DER - 3.0NM from DER 32.0NM to TAROH - 27.0NM to TAROH STD 1.0NM from DER - 3.0NM from DER 27.0NM to TAROH - 4.0NM to TAROH RWY26 : KTE 2.0NM from DER - 3.0NM from DER STD 2.0NM from DER - 3.0NM from DER 18.0NM to TAROH - 9.0NM to TAROH MIHO TRANSITION OIE 5.0NM to MIHO - MIHO</p>
<p>VAR 8° W</p>	DME GAP	<p>RWY08 : DER - 1.0NM from DER RWY26 : DER - 2.0NM from DER</p>
<p>Inappropriate Navaids</p>		See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1
<p>TAROH THREE DEPARTURE RWY08 : Climb on HDG081° at or above 1700FT, turn left direct to TAROH. RWY26 : Climb on HDG261° at or above 2200FT, turn right direct to TAROH. Note RWY08: 5.0% climb gradient required up to 1700FT. OBST ALT 755FT located at 0.7NM 100° FM end of RWY08. RWY26: 6.6% climb gradient required up to 2200FT. OBST ALT 1772FT located at 3.3NM 255° FM end of RWY26.</p>		
<p>MIHO TRANSITION From TAROH, to MIHOU.</p>		

CHANGE : Critical DME. DME GAP added.

STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID and TRANSITION

TAROH THREE DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	081 (072.9)	-7.8	—	—	+1700	—	—	RNAV1
002	DF	TAROH	—	—	-7.8	—	L	—	—	—	RNAV1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	261 (252.9)	-7.8	—	—	+2200	—	—	RNAV1
002	DF	TAROH	—	—	-7.8	—	R	—	—	—	RNAV1

MIHO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TAROH	—	—	-7.8	—	—	—	—	—	RNAV1
002	TF	MIHOU	—	334 (325.8)	-7.8	59.2	—	—	—	—	RNAV1


CHANGE : VAR. SID renamed. PROC course.

STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID and TRANSITION

OLIVE TWO DEPARTURE SANDA TRANSITION		RNAV 1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.	Critical DME	RWY08 : OYE 1.0NM from DER - 3.0NM from DER STD 1.0NM from DER - 3.0NM from DER 36.0NM to OLIVE - 34.0NM to OLIVE AJD 33.0NM to OLIVE - OLIVE KTE 20.0NM to OLIVE - 13.0NM to OLIVE RWY26 : KTE 2.0NM from DER - 3.0NM from DER 19.0NM to OLIVE - 14.0NM to OLIVE STD 2.0NM from DER - 3.0NM from DER 43.0NM to OLIVE - 39.0NM to OLIVE AJD 31.0NM to OLIVE - 22.0NM to OLIVE 19.0NM to OLIVE - OLIVE
	DME GAP	RWY08 : DER - 1.0NM from DER RWY26 : DER - 2.0NM from DER
	Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

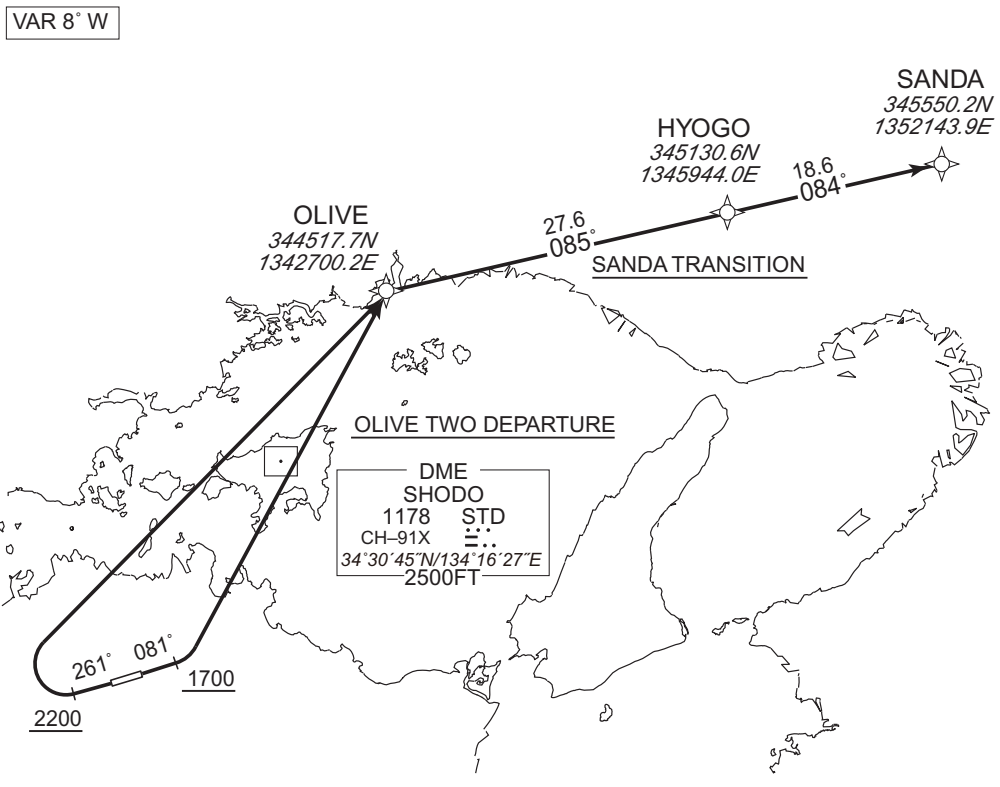

CHANGE : Critical DME. DME GAP added.

OLIVE TWO DEPARTURE

RWY08 : Climb on HDG 081° at or above 1700FT, turn left direct to OLIVE.
 RWY26 : Climb on HDG 261° at or above 2200FT, turn right direct to OLIVE.

NOTE RWY08: 5.0% climb gradient required up to 1700FT.
 OBST ALT 755FT located at 0.7NM 100° FM end of RWY08.
 RWY26: 6.6% climb gradient required up to 2200FT.
 OBST ALT 1772FT located at 3.3NM 255° FM end of RWY26.

SANDA TRANSITION

From OLIVE, to HYOGO, to SANDA.

STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID and TRANSITION

OLIVE TWO DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	081 (072.9)	-7.8	—	—	+1700	—	—	RNAV1
002	DF	OLIVE	—	—	-7.8	—	L	—	—	—	RNAV1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	261 (252.9)	-7.8	—	—	+2200	—	—	RNAV1
002	DF	OLIVE	—	—	-7.8	—	R	—	—	—	RNAV1

SANDA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OLIVE	—	—	-7.8	—	—	—	—	—	RNAV1
002	TF	HYOGO	—	085 (076.8)	-7.8	27.6	—	—	—	—	RNAV1
003	TF	SANDA	—	084 (076.4)	-7.8	18.6	—	—	—	—	RNAV1

CHANGE : SHTLE TRANSITION abolished. SANDA TRANSITION established.

STANDARD ARRIVAL CHART-INSTRUMENT


RJOT / TAKAMATSU

STAR

KAGAWA ARRIVAL

From over WIMPY, via KTE R058 to KTE VOR/DME.
Cross KTE VOR/DME at or above 5000FT.

CHANGE : Description of PROC name.

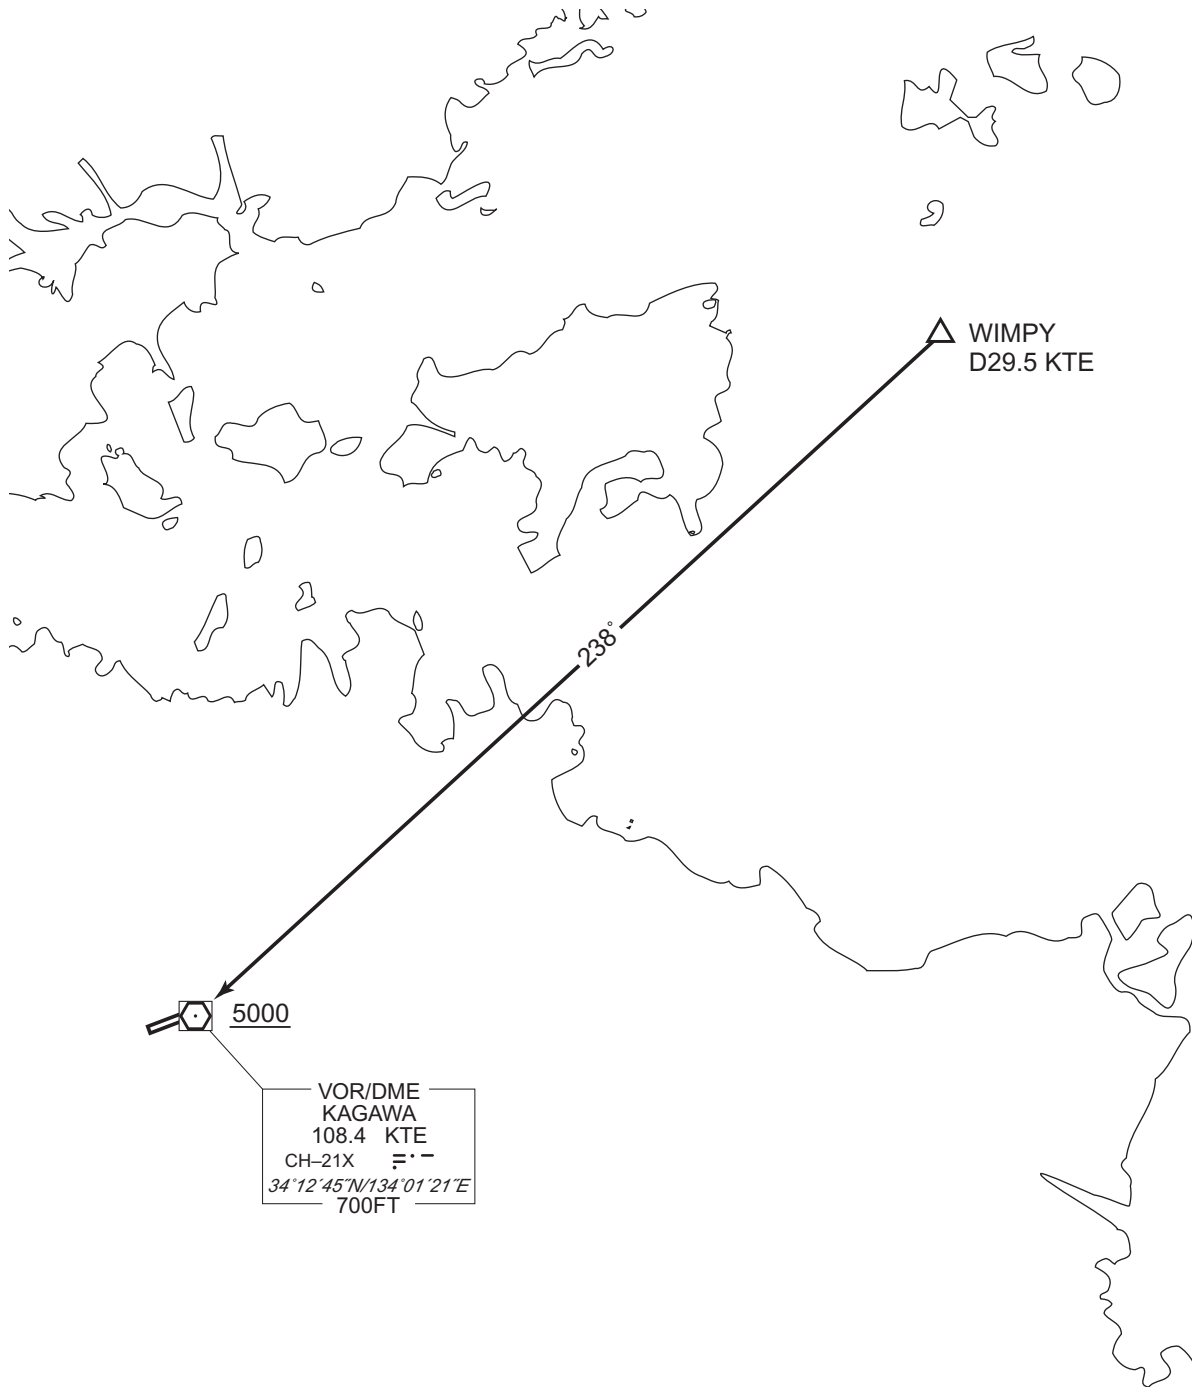

STANDARD ARRIVAL CHART-INSTRUMENT

RJOT / TAKAMATSU


RNAV STAR RWY26

POPAI ARRIVAL

RNAV1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W

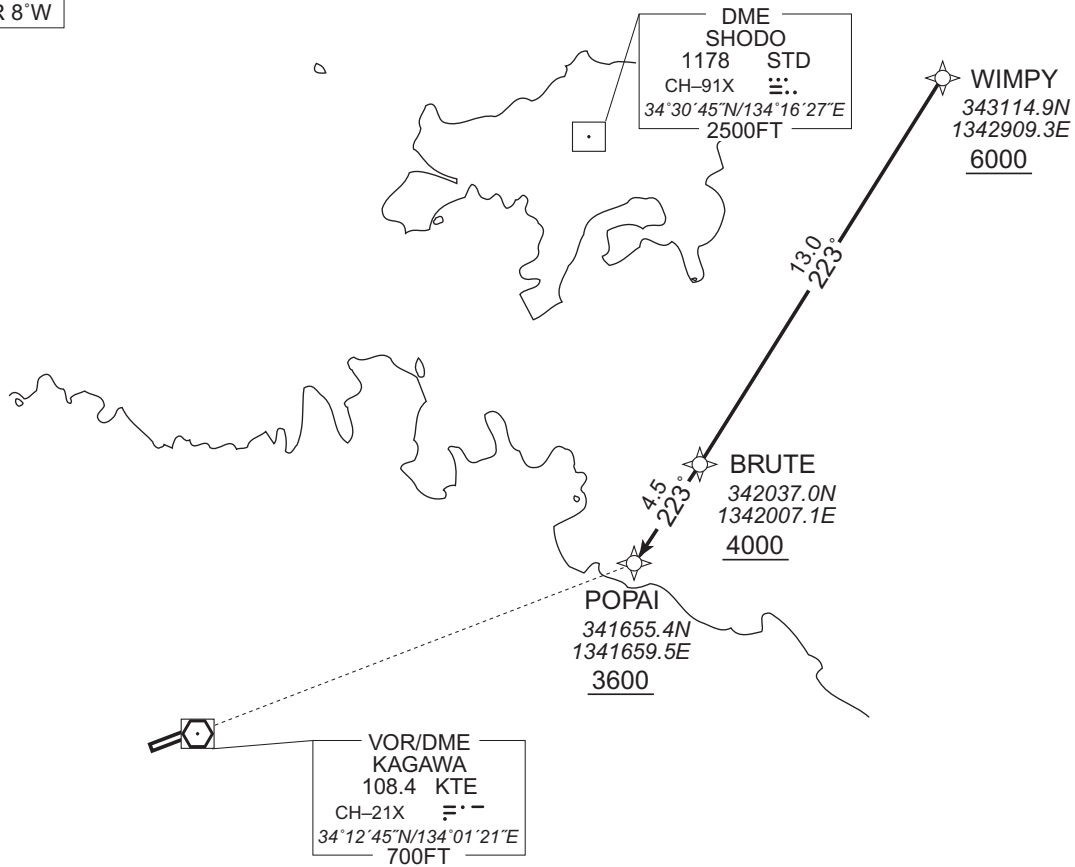

From WIMPY at or above 6000FT, to BRUTE at or above 4000FT, to POPAI at or above 3600FT.

Critical DME	STD : WIMPY - BRUTE, 2.0NM to POPAI - POPAI KTE : WIMPY - BRUTE
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	WIMPY	-	-	-7.6	-	-	+6000	-	-	RNAV1
002	TF	BRUTE	-	223 (215.1)	-7.6	13.0	-	+4000	-	-	RNAV1
003	TF	POPAI	-	223 (215.0)	-7.6	4.5	-	+3600	-	-	RNAV1


CHANGE : Critical DME added. TAKAMATSU TACAN abolished.

INSTRUMENT APPROACH CHART


RJOT / TAKAMATSU

ILS Z or LOC Z RWY26

KANSAI APP 121.2 – 120.4 – 261.2	ILS LOC 109.7 IKT ILS-GP 333.2 ILS-DME CH-34	TAKAMATSU TOWER 118.3 – 126.2	RADAR AVBL ATIS 127.45
-------------------------------------	---	----------------------------------	---------------------------

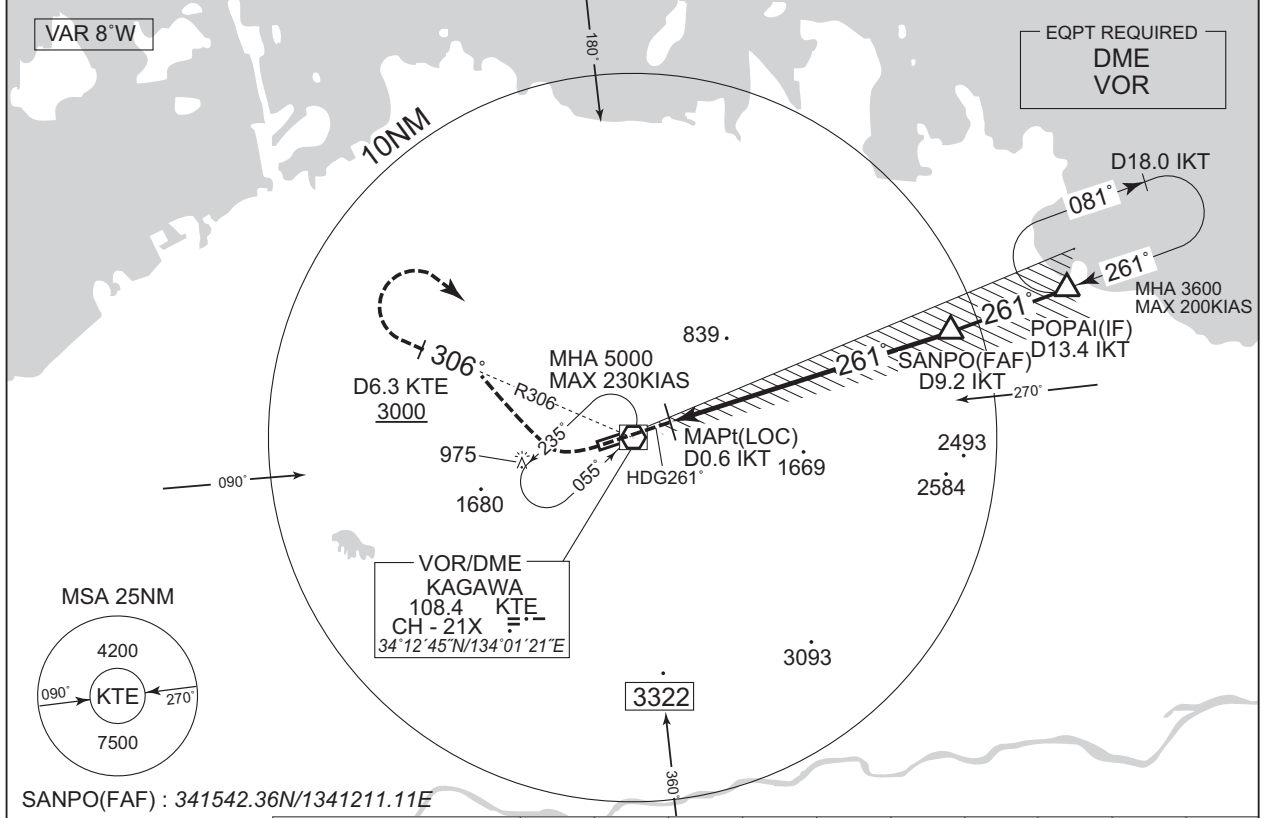

	NM to IKT	MAPt	2	3	4	5	6	7	8	9	FAF
	ALT (3.0° APCH Path)	-	1224	1543	1861	2180	2498	2817	3135	3453	3523

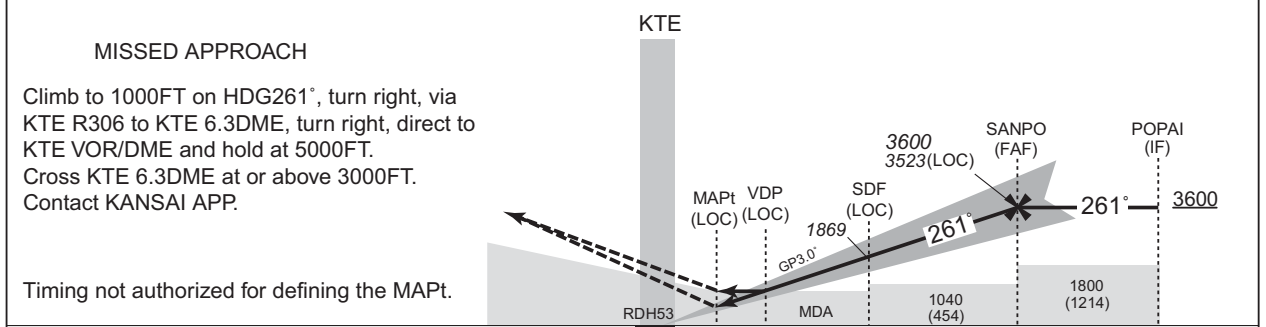

DME to IKT	0.2	0.6	0.9	4.0	9.2	13.4
NM to THR	0	0.5	0.7	3.9	9.1	13.2

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 586		AD elev. 607		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	786 (200)	550	920 (334)	900	1140 (533)	1600
B				1000		
C				1310 (703)		
D				1400		


Circling to NORTH side of RWY only.
MINIMA with Missed APCH climb gradient of 2.5% are not established.

INSTRUMENT APPROACH CHART

RJOT / TAKAMATSU

ILS Y or LOC Y RWY26

KANSAI APP 121.2 – 120.4 – 261.2	ILS LOC 109.7 IKT ILS-GP 333.2 ILS-DME CH-34	TAKAMATSU TOWER 118.3 – 126.2	RADAR AVBL ATIS 127.45
-------------------------------------	---	----------------------------------	---------------------------

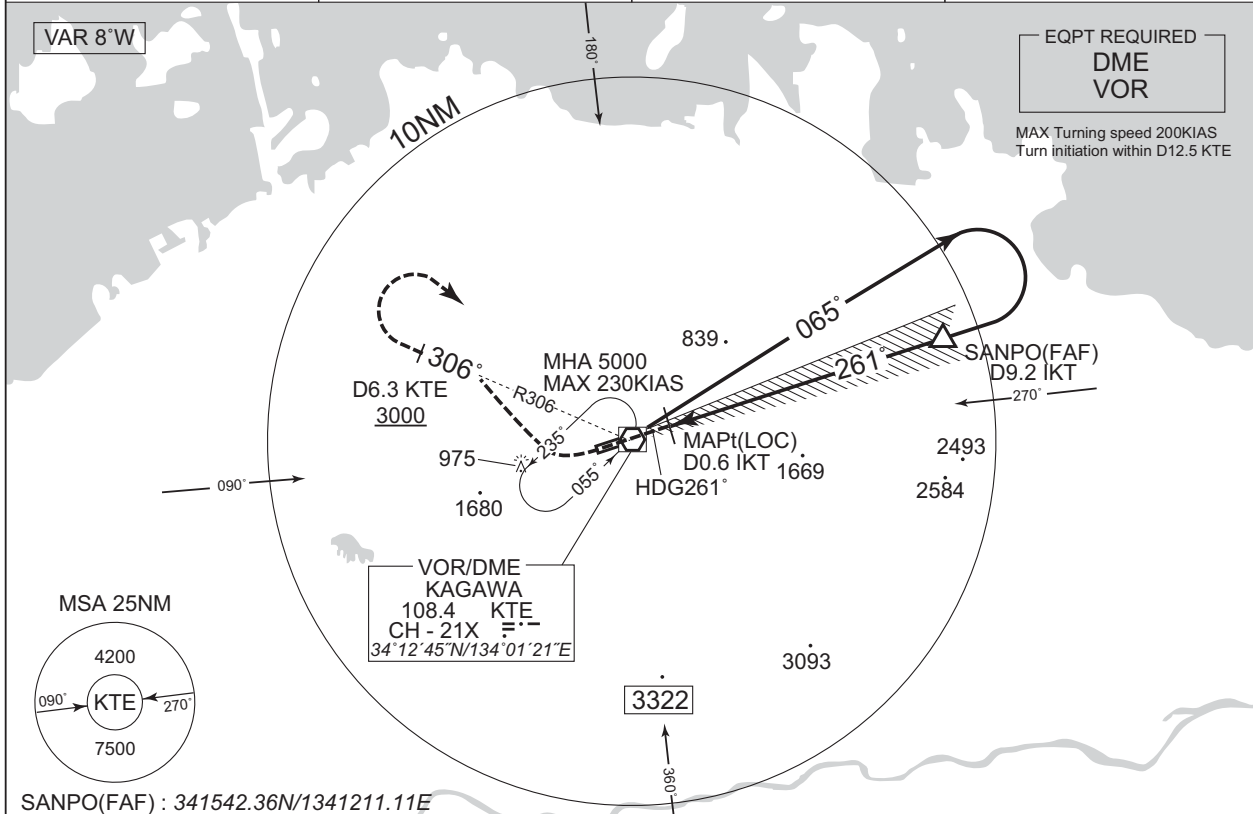


NM to IKT	MAPt	2	3	4	5	6	7	8	9	FAF
ALT (3.0° APCH Path)	-	1224	1543	1861	2180	2498	2817	3135	3453	3523

MISSED APPROACH

Climb to 1000FT on HDG261°, turn right, via KTE R306 to KTE 6.3DME, turn right, direct to KTE VOR/DME and hold at 5000FT.
Cross KTE 6.3DME at or above 3000FT.
Contact KANSAI APP.

Timing not authorized for defining the MAPt.

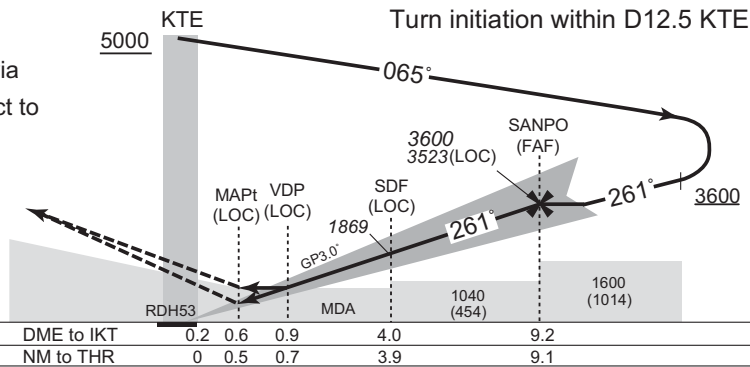

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 586		AD elev. 607		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	786 (200)	550	920 (334)	900	1140 (533)	1600
B				1000		
C				1310 (703)	2400	
D				1400	1350 (743)	3200



Circling to NORTH side of RWY only.
MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : Description of VAR.

INSTRUMENT APPROACH CHART

RJOT / TAKAMATSU

VOR RWY26

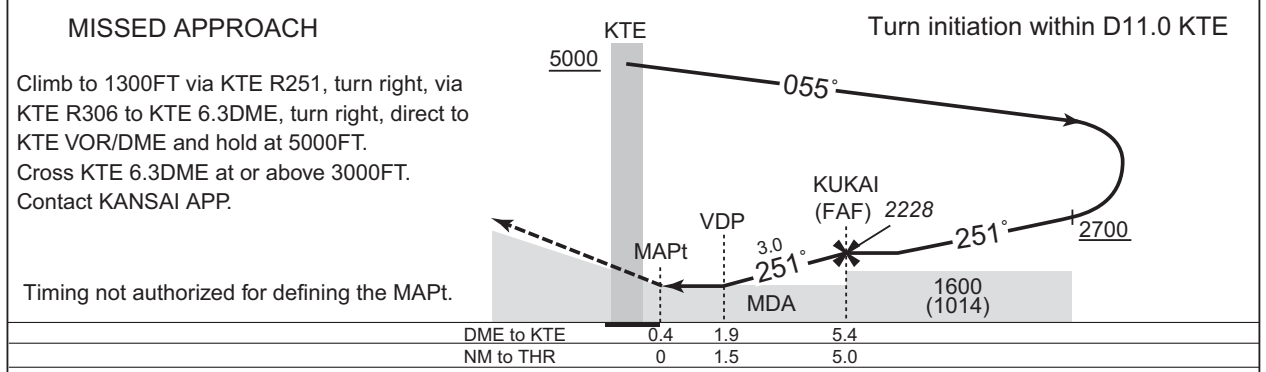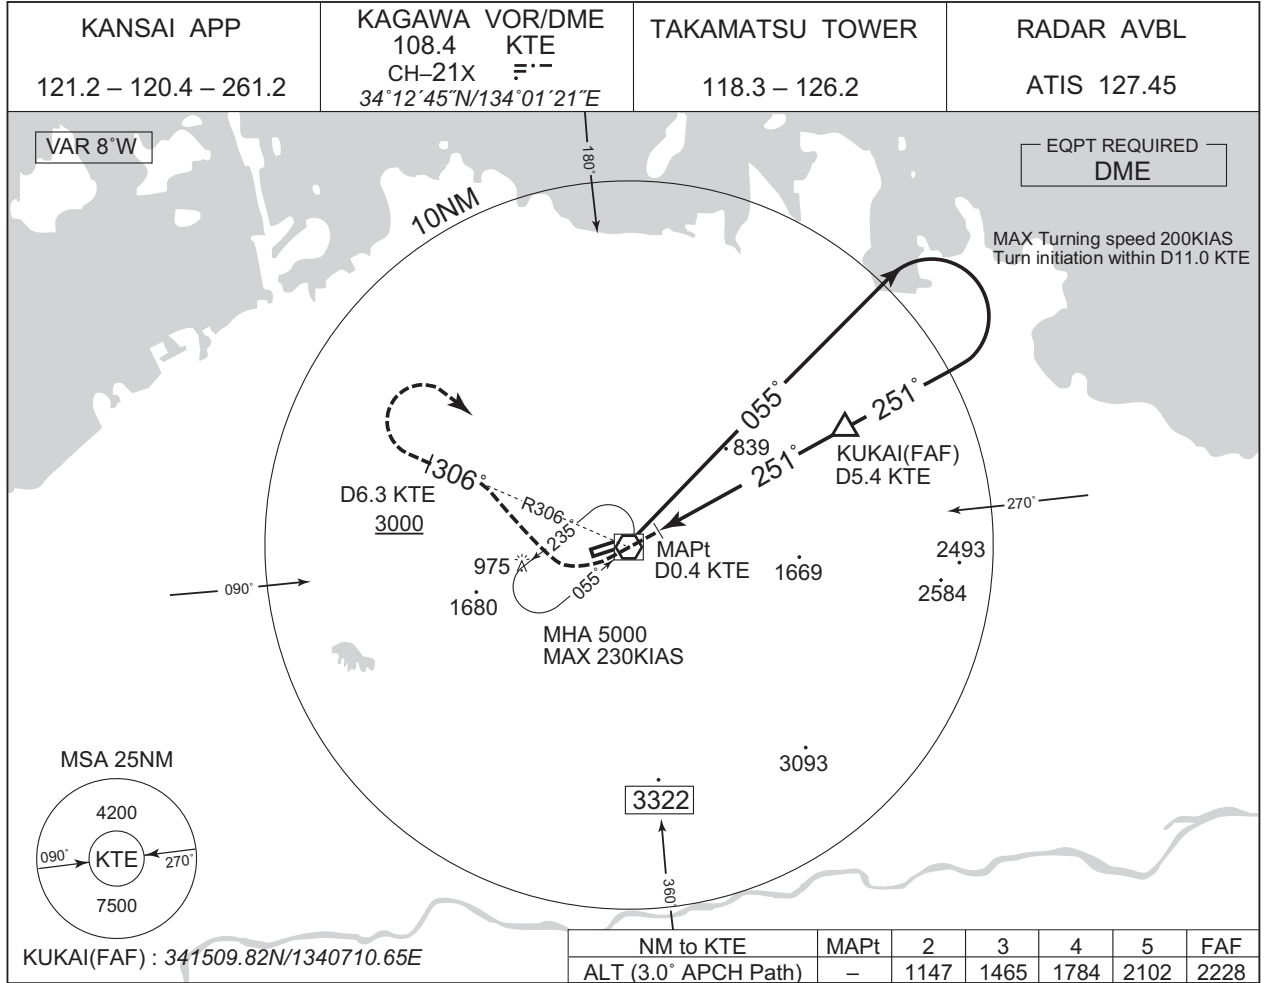

CHANGE : Description of VAR.

Missed APCH climb gradient MNM 5.0%



MINIMA		THR elev. 586	AD elev. 607
CAT	MDA(H)	RVR/ CMV	CIRCLING
	MDA(H)	VIS	
A	1140 (554)	1000	1140 (533) 1600
B		1200	1310 (703) 2400
C		1600	1350 (743) 3200
D			

Circling to NORTH side of RWY only.
MINIMA with Missed APCH climb gradient of 2.5% are not established.

INSTRUMENT APPROACH CHART

RJOT / TAKAMATSU

VOR A

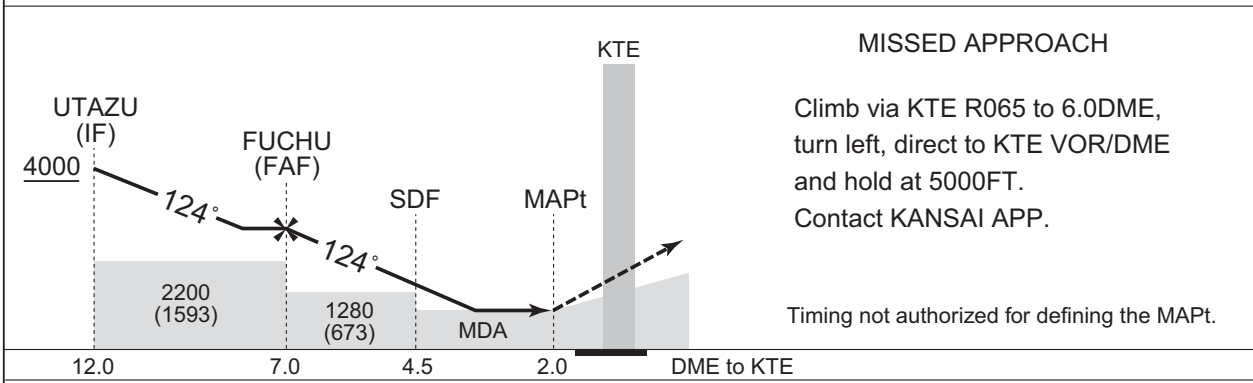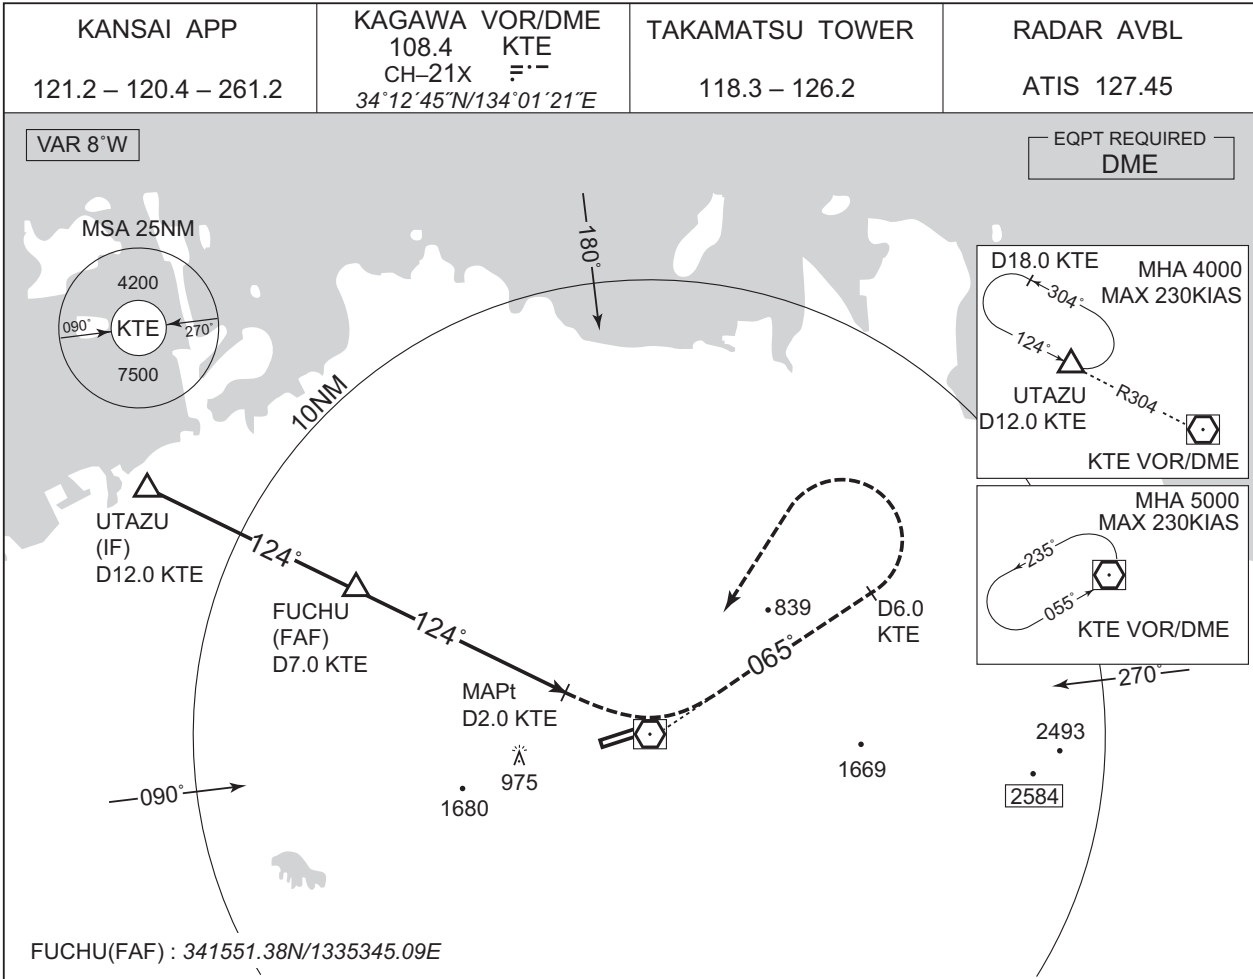

CHANGE : Description of VAR.


Missed APCH climb gradient MNM 5.0%

MINIMA		AD elev. 607
CAT	CIRCLING	
	MDA(H)	VIS
A	1060 (453)	1600
B		
C	1280 (673)	2400
D		3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to NORTH side of RWY only.

RJOT / TAKAMATSU

Visual REP

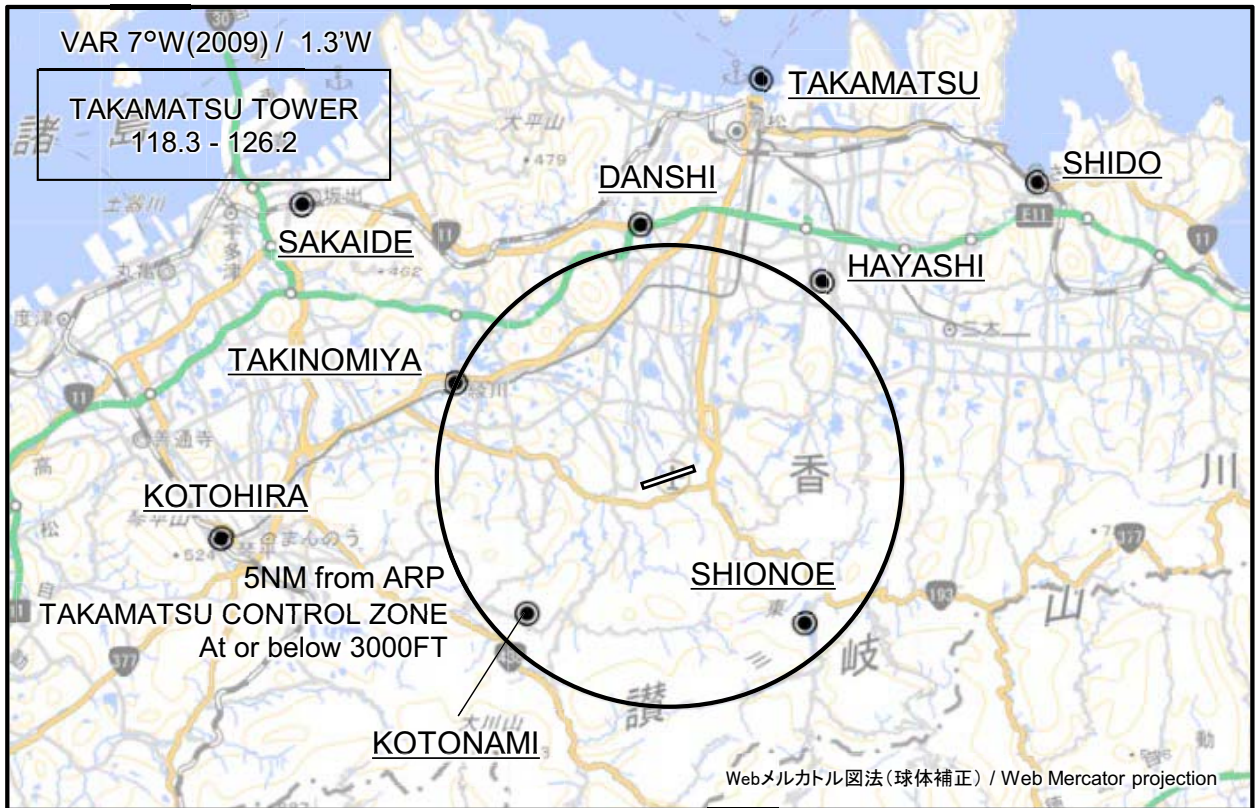

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP. Danshi(Remarks).


Call sign	BRG / DIST from ARP	Remarks
高松 Takamatsu	012°T / 8.9NM	高松港 Harbor
志度 Shido	051°T / 10.1NM	JR志度駅 JR Station
坂出 Sakaide	307°T / 9.9NM	JR坂出駅 JR Station
檀紙 Danshi	353°T / 5.5NM	高松檀紙IC Interchange
林 Hayashi	037°T / 5.3NM	由良山 Mt. Yura
滝宮 Takinomiya	294°T / 5.1NM	琴平電鉄滝宮駅 Station
琴平 Kotohira	262°T / 9.8NM	JR琴平駅 JR Station
琴南 Kotonami	226°T / 4.3NM	四国電力開閉所 Switch station of Electric Power
塩江 Shionoe	138°T / 4.2NM	内場池 Pond of Naiba

注：有視界飛行方式により高松空港に着陸しようとする航空機又は高松航空交通管制圏を通過しようとする航空機は、東方向から進入する場合は、志度ポイント上空で、西方向から進入する場合は、坂出ポイント又は琴平ポイント上空で、北方向から進入する場合は、高松ポイント上空において高松タワーに連絡すること。


NOTE : When VFR flight is going to enter the control zone for landing or passing through, the pilot should contact with the control tower over;
SHIDO in case of coming from east/
SAKAIDE or KOTOHIRA in case of coming from west/
TAKAMATSU in case of coming from north.

RJOT / TAKAMATSU

LDG CHART

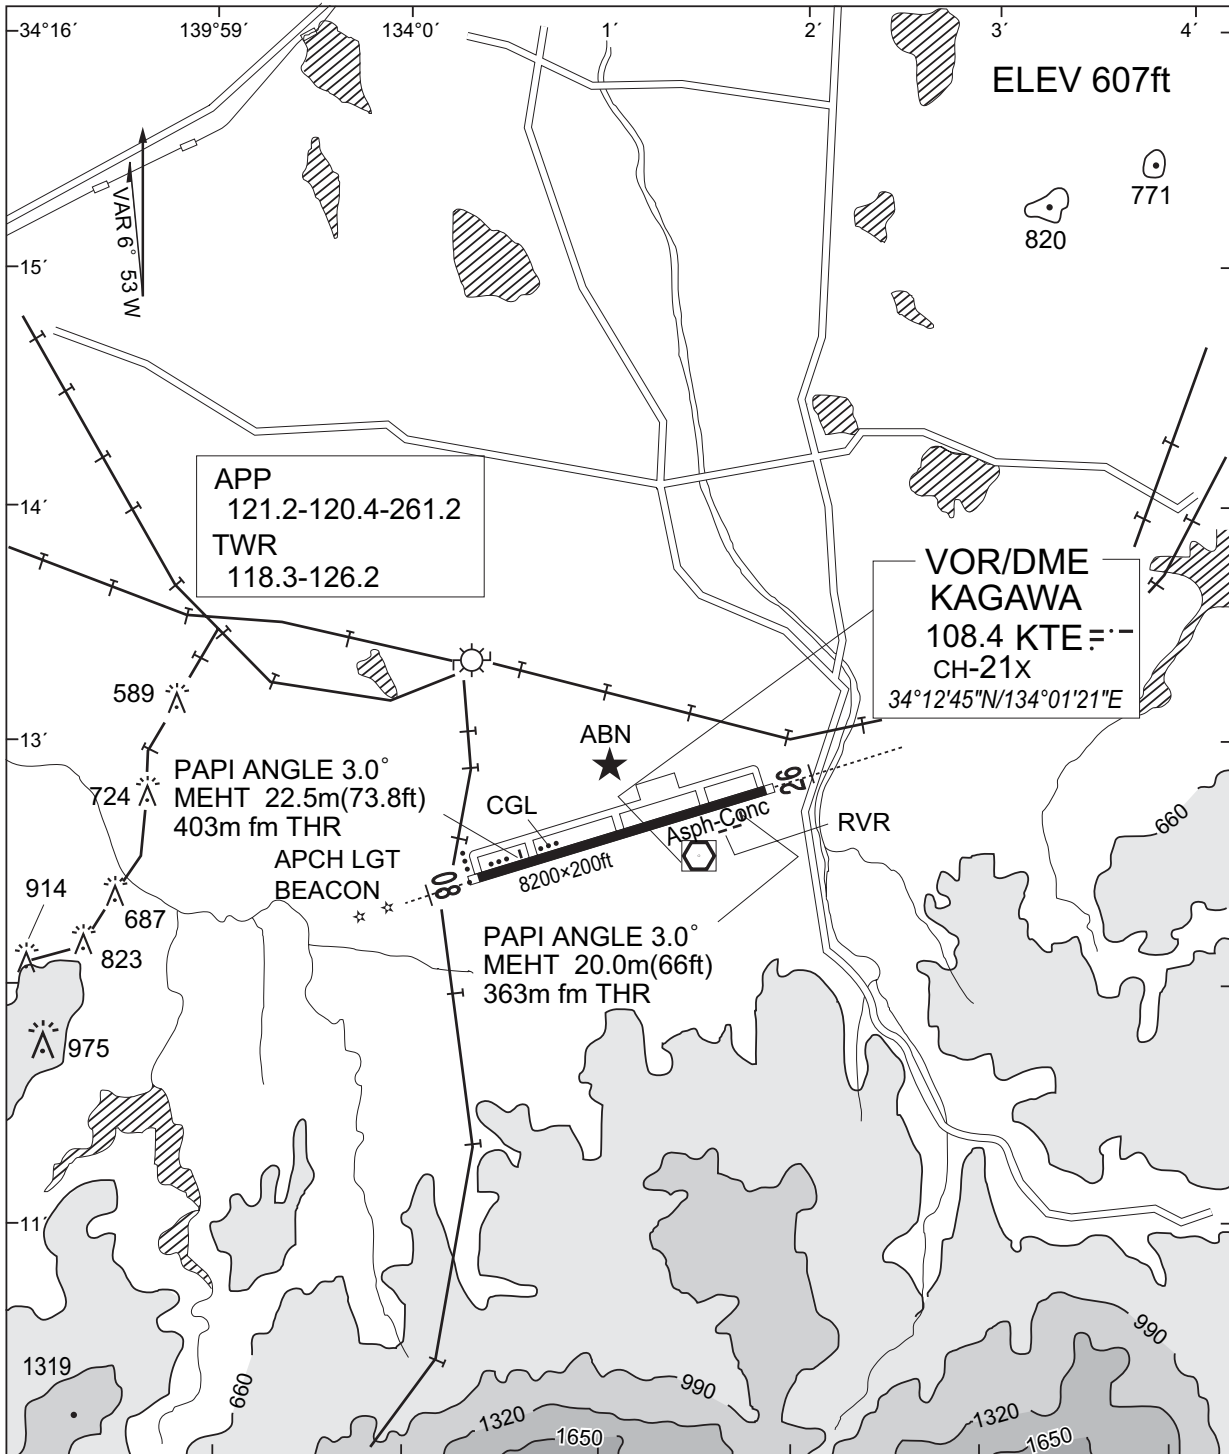

SCALE



ELEVATIONS AND HEIGHTS IN FEET
MEAN SEA LEVEL

RJOT / TAKAMATSU

Minimum Vectoring Altitude CHART

